



.....
Barracuda 4LP Family:
.....

ST34371N/W/WD/WC/DC
.....

ST32171N/W/WD/WC/DC
.....

ST34571N/W/WD/WC/DC
.....

ST32271N/W/WD/WC/DC
.....

.....
Product Manual, Volume 1
.....

.....
Barracuda 4LP Family:
.....

ST34371N/W/WD/WC/DC
.....

ST32171N/W/WD/WC/DC
.....

ST34571N/W/WD/WC/DC
.....

ST32271N/W/WD/WC/DC
.....

.....
Product Manual, Volume 1
.....



© 1998 Seagate Technology, Inc. All rights reserved
Publication number: 77767491, Rev. D
February 1998

Seagate, Seagate Technology, and the Seagate logo are registered trademarks of Seagate Technology, Inc. Barracuda, SeaFAX, SeaFONE, SeaNET, SeaTDD, and SeaBOARD are either trademarks or registered trademarks of Seagate Technology, Inc. or one of its subsidiaries. All other trademarks or registered trademarks are the property of their respective owners.

Seagate reserves the right to change, without notice, product offerings or specifications. No part of this publication may be reproduced in any form without written permission of Seagate Technology, Inc.

Revision status summary sheet

Revision	Date	Writer/Engineer	Sheets Affected
Rev. A	11/18/96	D. Ashby/B. Norman	All
Rev. B	06/09/97	D. Ashby/B. Norman	3, 4, 5, 7, 8, 10, 11, 15, 17, 19, 24, 31, 33, 34, 36, 45, 53, 56, 57, 67, 68, 71, 72, 73, 75 and 76.
Rev. C	07/29/97	K. Tan	10.
Rev. D	02/13/98	D. Ashby/B. Norman	15, 17, 21, 29, 75, and 76.

Notice.

Product Manual 77767491 is Volume 1 of a two Volume document with the SCSI Interface information in the Volume 2 SCSI Interface Product Manual, part number 77738479.

If the SCSI Interface information is needed the Volume 2 Interface Manual should be ordered, part number 77738479.

Contents

1.0	Scope	1
2.0	Applicable standards and reference documentation	3
2.1	Standards	3
2.1.1	Electromagnetic compatibility	3
2.2	Electromagnetic compliance	3
2.3	Reference documents	4
3.0	General description	5
3.1	Standard features	7
3.2	Media characteristics	7
3.3	Performance	7
3.4	Reliability	7
3.5	Unformatted and formatted capacities	8
3.6	Programmable drive capacity	8
3.7	Factory installed accessories	8
3.8	Options (factory installed)	8
3.9	Accessories (user installed)	8
4.0	Performance characteristics	9
4.1	Internal drive characteristics (transparent to user)	9
4.2	SCSI Seek performance characteristics (visible to user)	9
4.2.1	Access time	9
4.2.2	Format command execution time (minutes)	10
4.2.3	Generalized performance characteristics	10
4.3	Start/stop time	11
4.4	Prefetch/multi-segmented cache control	11
4.5	Cache operation	11
4.5.1	Caching write data	12
4.5.2	Prefetch operation	12
5.0	Reliability specifications	15
5.1	Error rates	15
5.1.1	Environmental interference	15
5.1.2	Read errors	15
5.1.3	Write errors	15
5.1.4	Seek errors	16
5.2	Reliability and service	16
5.2.1	Mean time between failure	16
5.2.2	Preventive maintenance	16
5.2.3	Service life	16
5.2.4	Service philosophy	16
5.2.5	Service tools	16
5.2.6	Hot plugging Barracuda 4LP disc drives	17
5.2.7	S.M.A.R.T.	17
5.2.8	Product warranty	17
6.0	Physical/electrical specifications	19
6.1	AC power requirements	19
6.2	DC power requirements	19
6.2.1	Conducted noise immunity	20
6.2.2	Power sequencing	20
6.2.3	12 V - Current profile	20
6.3	Power dissipation	21
6.4	Environmental limits	21
6.4.1	Temperature	21
6.4.2	Relative humidity	22

6.4.3	Effective altitude (sea level)	23
6.4.4	Shock and vibration	23
6.4.5	Air cleanliness	25
6.4.6	Acoustics	25
6.4.7	Electromagnetic susceptibility	25
6.5	Mechanical specifications	26
7.0	Defect and error management	29
7.1	Drive internal defects and errors	29
7.2	SCSI systems errors	29
8.0	Installation	31
8.1	Drive ID/option select header	31
8.1.1	Notes for Figures 7a, 7b, 7c, 7d, and 7e.	36
8.1.2	Function description.	38
8.2	Drive orientation	39
8.3	Cooling	39
8.3.1	Air flow	39
8.4	Drive mounting	40
8.5	Grounding	40
9.0	Interface requirements.	41
9.1	General description	41
9.2	SCSI interface messages supported.	41
9.3	SCSI interface commands supported	42
9.3.1	Inquiry Vital Product data.	45
9.3.2	Mode Sense data.	46
9.4	SCSI bus conditions and miscellaneous features supported	51
9.5	Synchronous data transfer	52
9.5.1	Synchronous data transfer periods supported.	52
9.5.2	REQ/ACK offset.	52
9.6	Physical interface	52
9.6.1	DC cable and connector	52
9.6.2	SCSI Interface physical description	55
9.6.3	SCSI Interface Cable requirements	55
9.6.4	Mating connectors	56
9.7	Electrical description	68
9.7.1	Single-ended drivers/receivers	68
9.7.2	Differential drivers/receivers	69
9.8	Terminator requirements	71
9.9	Terminator power	71
9.10	Disc drive SCSI timing.	72
10.0	Seagate technical support services	75

Figures


Figure 1.	Barracuda 4LP family drive	1
Figure 2.	Barracuda 4LP family drive	6
Figure 3.	Typical Barracuda 4LP family drive +5 V and +12 V current profile.	20
Figure 4.	Locations of PCB components listed in Table 3.	22
Figure 5.	Recommended mounting	24
Figure 6a.	Mounting configuration dimensions for models “N”	26
Figure 6b.	Mounting configuration dimensions for models “W” and “WD”	27
Figure 6c.	Mounting configuration dimensions for models “WC” and “DC”	28
Figure 7a.	Barracuda 4LP family drive ID select header for models “N”	32
Figure 7b.	Barracuda 4LP family drive ID select for models “W,” “WC,” “WD,” and “DC”	33
Figure 7c.	Barracuda 4LP family drive ID select header J1-auxiliary for models “W” and “WD” (J1-Auxiliary Pins 1A - 12A)	34
Figure 7d.	Barracuda 4LP family drive option select header for models “N,” “W,” and “WD”	35
Figure 7e.	Barracuda 4LP family drive option select header for models “WC” and “DC”	35
Figure 8.	Air flow (suggested)	39
Figure 9a.	Physical interface for “N” model drives	53
Figure 9b.	Model “W” and “WD” drive physical interface (68 pin J1 SCSI I/O connector)	54
Figure 9c.	Model “WC” and “DC” drive physical interface (80 pin J1 SCSI I/O connector and DC power connector)	54
Figure 10.	SCSI Daisy-chain interface cabling for “N,” “W,” and “WD” model drives	58
Figure 11a.	Nonshielded 50 pin SCSI device connector used on “N” models	59
Figure 11b.	Nonshielded 68 pin SCSI device connector used on “W” and “WD” models	60
Figure 11c.	Nonshielded 80 pin SCSI “SCA-2” connector, used on “WC” and “DC” models	61
Figure 12.	Single-ended transmitters and receivers	68
Figure 13.	Typical differential I/O line transmitter/receiver and external terminators	70

1.0 Scope

This manual describes the Seagate Technology®, Inc. Barracuda 4LP™ disc drives.

Barracuda 4LP drives support the small computer system interface (SCSI) as described in the ANSI SCSI, SCSI-2, and SCSI-3 (Fast-20) interface specifications to the extent described in this manual. The *SCSI Interface Product Manual* (part number 77738479) described general SCSI interface characteristics of this and other families of Seagate drives.

From this point on in this product manual the reference to Barracuda 4LP models is referred to as “the drive” (unless references to individual models are necessary).

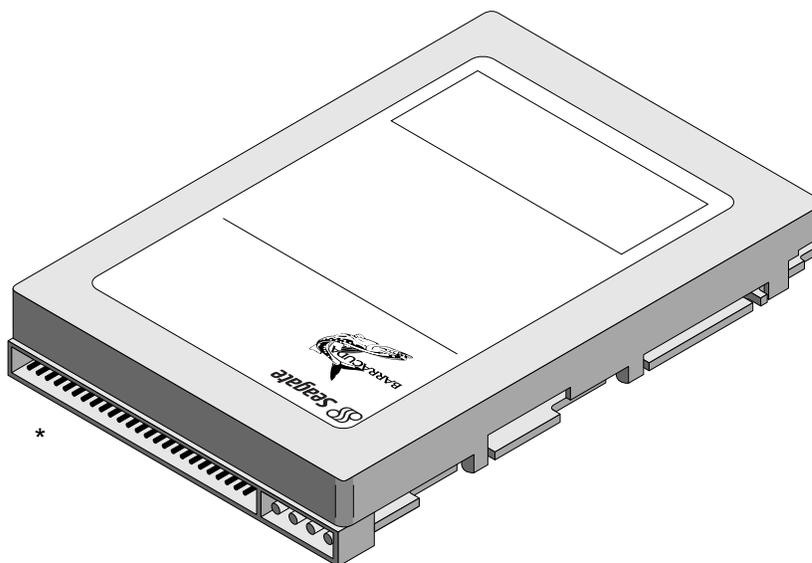

*Model “N” version with 50 pin SCSI I/O connector

Figure 1. Barracuda 4LP family drive

2.0 Applicable standards and reference documentation

The drive has been developed as a system peripheral to the highest standards of design and construction. The drive depends upon its host equipment to provide adequate power and environment in order to achieve optimum performance and compliance with applicable industry and governmental regulations. Special attention must be given in the areas of safety, power distribution, shielding, audible noise control, and temperature regulation. In particular, the drive must be securely mounted in order to guarantee the specified performance characteristics. Mounting by bottom holes must meet the requirements of Section 8.4.

2.1 Standards

The Barracuda 4LP Family complies with Seagate standards as noted in the appropriate sections of this Manual and the Seagate SCSI Interface Manual, part number 77738479 (Vol. 2).

The Barracuda 4LP disc drive is a UL recognized component per UL1950, CSA certified to CSA C22.2 No. 950-M89, and VDE certified to VDE 0805 and EN60950.

2.1.1 Electromagnetic compatibility

The drive, as delivered, is designed for system integration and installation into a suitable enclosure prior to use. As such the drive is supplied as a subassembly and is not subject to Subpart B of Part 15 of the FCC Rules and Regulations nor the Radio Interference Regulations of the Canadian Department of Communications.

The design characteristics of the drive serve to minimize radiation when installed in an enclosure that provides reasonable shielding. As such, the drive is capable of meeting the Class B limits of the FCC Rules and Regulations of the Canadian Department of Communications when properly packaged. However, it is the user's responsibility to assure that the drive meets the appropriate EMI requirements in their system. Shielded I/O cables may be required if the enclosure does not provide adequate shielding. If the I/O cables are external to the enclosure, shielded cables should be used, with the shields grounded to the enclosure and to the host controller.

2.1.1.1 Electromagnetic susceptibility

As a component assembly, the drive is not required to meet any susceptibility performance requirements. It is the responsibility of those integrating the drive within their systems to perform those tests required and design their system to ensure that equipment operating in the same system as the drive or external to the system does not adversely affect the performance of the drive. See Section 5.1.1 and Table 2, DC power requirements.

2.2 Electromagnetic compliance

Seagate uses an independent laboratory to confirm compliance to the directives/standard(s) for CE Marking and C-Tick Marking. The drive was tested in a representative system for typical applications. The selected system represents the most popular characteristics for test platforms. The system configurations include:

- 486, Pentium, and PowerPC microprocessors
- 3.5-inch floppy disc drive
- Keyboard
- Monitor/display
- Printer
- External modem
- Mouse

Although the test system with this Seagate model complies to the directives/standard(s), we cannot guarantee that all systems will comply. The computer manufacturer or system integrator shall confirm EMC compliance and provide CE Marking and C-Tick Marking for their product.

Electromagnetic compliance for the European Union

If this model has the CE Marking it complies with the European Union requirements of the Electromagnetic Compatibility Directive 89/336/EEC of 03 May 1989 as amended by Directive 92/31/EEC of 28 April 1992 and Directive 93/68/EEC of 22 July 1993.

Australian C-Tick

If this model has the C-Tick Marking it complies with the Australia/New Zealand Standard AS/NZS3548 1995 and meets the Electromagnetic Compatibility (EMC) Framework requirements of Australia's Spectrum Management Agency (SMA).

2.3 Reference documents

Installation Guide	Seagate P/N 77767492
SCSI Interface Manual	Seagate P/N 77738479
ANSI small computer system interface (SCSI) document numbers:	
X3.131-1994	SCSI-2
X3T10/855D rev. 15a	SPI
X3T10/1071D rev. 6	Fast-20 (also called "Ultra SCSI")
SFF-8046 Specification for 80-pin SCA connector for SCSI Disk Drives	
Package Test Specification	Seagate P/N 30190-001 (under 100 lb.)
Package Test Specification	Seagate P/N 30191-001 (over 100 lb.)
Specification, Acoustic Test Requirements, and Procedures	Seagate P/N 30553-001

In case of conflict between this document and any referenced document, this document takes precedence.

3.0 General description

Barracuda 4LP drives combine magnetoresistive (MR) heads, partial response/maximum likelihood (PRML) read channel electronics, embedded servo technology, and a SCSI-3 (Fast-20) interface to provide high performance, high capacity data storage for a variety of systems including engineering workstations, network servers, mainframes, and supercomputers.

Fast-20 (also known as Ultra SCSI) is a negotiated transfer rate. This transfer rate will occur only if your host adapter also supports Fast-20 data transfer rates. This drive also operates at SCSI-1 and SCSI-2 data transfer rates for backward compatibility with non-Fast-20 capable SCSI host adapters.

Table 1 lists the features that differentiate the various Barracuda 4LP SCSI-3 Fast-20 (Ultra SCSI) models.

Table 1: Drive model number vs. differentiating features

Model number	Number of Heads	I/O circuit type	Number of I/O connector pins	Number of I/O data bus bits
ST34371N	10	single-ended	50	8
ST34371W	10	single-ended	68	16
ST34371WD	10	differential	68	16
ST34371WC	10	single-ended	80	16
ST34371DC	10	differential	80	16
ST32171N	5	single-ended	50	8
ST32171W	5	single-ended	68	16
ST32171WD	5	differential	68	16
ST32171WC	5	single-ended	80	16
ST32171DC	5	differential	80	16
ST34571N	10	single-ended	50	8
ST34571W	10	single-ended	68	16
ST34571WD	10	differential	68	16
ST34571WC	10	single-ended	80	16
ST34571DC	10	differential	80	16
ST32271N	5	single-ended	50	8
ST32271W	5	single-ended	68	16
ST32271WD	5	differential	68	16
ST32271WC	5	single-ended	80	16
ST32271DC	5	differential	80	16

The drive records and recovers data on 3.5-inch (86 mm) non-removeable discs.

The drive supports the Small Computer System Interface (SCSI) as described in the ANSI SCSI-2 interface specifications to the extent described in this manual (volume 1), which defines the product performance characteristics of the Barracuda 4LP family of drives, and the *SCSI Interface Product Manual* (volume 2), part number 77738479, which describes the general interface characteristics of this and other families of Seagate SCSI drives.

The drive's interface supports multiple initiators, disconnect/reconnect, self-configuring host software, and automatic features that relieve the host from the necessity of knowing the physical characteristics of the targets (logical block addressing is used).

The head and disc assembly (HDA) is sealed at the factory. Air circulates within the HDA through a non-replaceable filter to maintain a contamination-free HDA environment.

Refer to Figure 2 for an exploded view of the drive. This exploded view is for information only—never disassemble the HDA and do not attempt to service items in the sealed enclosure (heads, media, actuator, etc.) as this requires special facilities. The drive contains no replaceable parts. Opening the HDA voids your warranty.

Barracuda 4LP drives use a dedicated landing zone at the innermost radius of the media to eliminate the possibility of destroying or degrading data by landing in the data zone. The drive automatically goes to the landing zone when power is removed.

An automatic shipping lock prevents potential damage to the heads and discs that results from movement during shipping and handling. The shipping lock automatically disengages when power is applied to the drive and the head load process begins.

Barracuda 4LP drives decode track 0 location data from the servo data embedded on each surface to eliminate mechanical transducer adjustments and related reliability concerns.

A high-performance actuator assembly with a low-inertia, balanced, patented, straight-arm design provides excellent performance with minimal power dissipation.

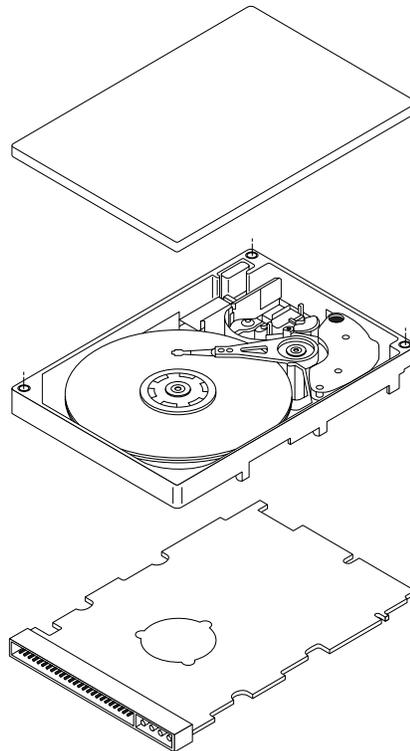


Figure 2. Barracuda 4LP family drive

3.1 Standard features

The Barracuda 4LP Family has the following standard features:

- Integrated SCSI controller
- Single-ended or differential SCSI drivers and receivers
- 8 bit and 16 bit I/O data bus models available
- Asynchronous and synchronous data transfer protocol
- Firmware downloadable via SCSI interface
- Selectable even byte sector sizes from 180 to 4,096 bytes/sector
- Programmable drive capacity
- Programmable sector reallocation scheme
- Flawed sector reallocation at format time
- Programmable auto write and read reallocation
- Reallocation of defects on command (Post format)
- 128 bit Reed-Solomon error correcting code
- Sealed head and disc assembly
- No preventative maintenance or adjustment required
- Dedicated laser textured head landing zone
- Embedded servo data rather than a separate servo data surface
- Self diagnostics performed when power is applied to the drive
- 1:1 Interleave
- Zoned bit recording (ZBR)
- Vertical, horizontal, or top down mounting
- Dynamic spindle brake
- Active IC terminators enabled by jumpers (“N” and “W” models only)
- 512 K byte data buffer
- Hot plug compatibility (section 9.6.4.3 lists proper host connector needed) for “WC” and “DC” model drives
- SCAM (SCSI Configured AutoMagically) plug-n-play level 1 compliant as shipped. Level 2 is a factory installed option.
- Low audible noise for office environment
- Low power consumption

3.2 Media characteristics

The media used on the drive has a diameter of approximately 3.5 inches (86 mm). The aluminum substrate is coated with a thin film magnetic material, overcoated with a proprietary protective layer for improved durability and environmental protection.

3.3 Performance

- Supports industry standard Ultra SCSI interface (also called “Fast-20 SCSI”) [1]
- Programmable multi-segmentable cache buffer
- 7200 RPM spindle. Average latency = 4.17 ms
- Command queuing of up to 64 commands
- Background processing of queue
- Supports start and stop commands (spindle stops spinning)

3.4 Reliability

- 1,000,000 hour MTBF
- LSI circuitry
- Balanced low mass rotary voice coil actuator
- Incorporates industry-standard Self-Monitoring, Analysis and Reporting Technology (S.M.A.R.T.)
- Incorporates Seek To Improve Reliability algorithm (STIR)
- 5-year warranty

[1] Note: Some host adapter companies support the term “Fast-20 SCSI.”

3.5 Unformatted and formatted capacities

Formatted capacity depends on the number of spare reallocation sectors reserved and the number of bytes per sector. The following table shows the standard OEM model capacities:

	Formatted [1] Data Block Size 512 Byte/Sector	Unformatted
ST34371	4.35 GB [2]	5.31 GB
ST32171	2.16 GB [2]	2.65 GB
ST34571	4.55 GB [2]	5.54 GB
ST32271	2.26 GB [2]	2.77 GB

Notes.

- [1] Sector size selectable at format time. Users having the necessary equipment may modify the data block size before issuing a format command and obtain different formatted capacities than those listed. User available capacity depends on spare reallocation scheme selected. See Mode Select Command and Format Command in the SCSI Interface Product Manual P/N 77738479.
- [2] Sparing equivalent to eighty spare sectors per eight cylinder region. Spares are located at the end of each sparing region.

3.6 Programmable drive capacity

Using the Mode Select command, the drive can change its capacity to something less than maximum. See Table 5.2.1-13 in the SCSI I/O Product Manual, P/N 77738479, Rev. G. Refer to the Parameter list block descriptor, bytes 1, 2 and 3. A value of zero in bytes 1, 2 and 3 indicates that the drive shall not change the capacity it is currently formatted to have. A number in bytes 1, 2 and 3 that is less than the maximum number of LBAs changes the total drive capacity to the value in the block descriptor bytes 1, 2 and 3. A value greater than the maximum number of LBAs is rounded down to the maximum capacity.

3.7 Factory installed accessories

OEM Standard drives are shipped with Installation Guide P/N 77767492 (unless otherwise specified). The factory also ships with the drive a small bag of the two jumper plug types used for the J6, J2 and J1-Aux option select jumper headers.

3.8 Options (factory installed)

All customer requested options are incorporated during production or packaged at the manufacturing facility before shipping. Some of the options available are (not an exhaustive list of possible options):

- Other capacities can be ordered depending on sparing scheme and sector size requested.
- Single unit shipping pack. The drive is normally shipped in bulk packaging to provide maximum protection against transit damage. Units shipped individually require additional protection as provided by the single unit shipping pack. Users planning single unit distribution should specify this option.
- The Installation Guide (P/N 77767492) is usually included with each standard OEM drive shipped, but extra copies may be ordered.
- Level 2 SCAM compliance.

3.9 Accessories (user installed)

The following accessories are available. All accessories may be installed in the field.

- Single unit shipping pack.

4.0 Performance characteristics

4.1 Internal drive characteristics (transparent to user)

	ST34371	ST32171	ST34571	ST32271	
Drive Capacity	5.31	2.65	5.54	2.77	GByte (UNF, rounded off values)
Read/Write Heads	10	5	10	5	
Bytes/Track	102,500	102,500	106,980	106,980	Bytes (Avg, rounded off values)
Bytes/Surface	531	531	554	554	Mbytes (UNF, rounded off values)
Tracks/Surface, Total	5,178	5,178	5,178	5,178	Tracks (user accessible)
Tracks/Inch	5,555	5,555	5,555	5,555	TPI
Peak Bits/Inch	123,000	123,000	128,000	128,000	BPI
Internal Data Rate	80-122	80-122	83-126	83-126	Mbits/sec (variable with zone)
Disc Rotational Speed	7,200	7,200	7,200	7,200	r/min
Average Rotational Latency	4.17	4.17	4.17	4.17	ms

4.2 SCSI Seek performance characteristics (visible to user) [6]*

The values given in Section 4.2.1 apply to all models of the Barracuda 4LP family unless otherwise specified. Refer to Section 9.10 and to the SCSI-2 Interface Product Manual 77738479 for additional timing details.

4.2.1 Access time [8]

			Including Controller Overhead (without disconnect) [1] [4]		
			Drive Level		
			Read	Write	
			ms		
Average	–	Typical [3]	9.4	10.4	
		Max. [2]	10.8	11.3	
Single Track	–	Typical [3]	2.0	2.1	
		Max. [2]	2.2	2.3	
Full Stroke	–	Typical [3]	17.5	18.5	
		Max. [2]	20.0	20.5	

*[] All notes for Section 4.2 are listed at end of Section 4.2.3.

4.2.2 Format command execution time (minutes) [1]*

	ST34371/ST34571	ST32171/ST32271
Maximum (with verify)	95	50
Maximum (no verify)	65	35

4.2.3 Generalized performance characteristics

Minimum sector interleave 1 to 1

Data buffer transfer rate to/from disc media (one 512-byte sector):

Min.	[4]*	9.5	MByte/sec
Avg.	[4]	13.2	MByte/sec
Max.	[4]	15.0	MByte/sec

Data buffer transfer rate to/from disc media: (< 1 track):

Min.	[4]	7.1	MByte/sec	divided by (interleave factor)
Avg.	[4]	10.2	MByte/sec	divided by (interleave factor)
Max.	[4]	11.7	MByte/sec	divided by (interleave factor)

SCSI interface data transfer rate (asynchronous) [5]:

Maximum instantaneous	6.0 Mbytes/sec [6]
Maximum average	6.0 Mbytes/sec [7]

Synchronous transfer rate for SCSI Fast-20 (Ultra SCSI):
(8 bit data bus models) 1.25 to 20 Mbytes/sec

Synchronous transfer rate for SCSI Fast-20 (Ultra SCSI):
(16 bit data bus models) 2.5 to 40 Mbytes/sec

Synchronous transfer rate for fast SCSI-2:
(8 bit data bus models) 1.25 to 10 Mbytes/sec

Synchronous transfer rate for fast SCSI-2:
(16 bit data bus models). 2.5 to 20 Mbytes/sec

Sector Sizes:

Default	512 byte user data blocks
Variable	180 to 4,096 bytes per sector in even number of bytes per sector. If n (number of bytes per sector) is odd, then n-1 will be used.

Read/write consecutive sectors on a track Yes

Flaw reallocation performance impact (for flaws reallocated at format time using the spare sectors per sparing region reallocation scheme.) Negligible

Overhead time for head switch (512 byte sectors) in sequential mode 1 msec

Overhead time for one track cylinder switch in sequential mode <2.4 msec (typical)

Average rotational latency 4.17 msec

*[] Notes listed after Section 4.2.3.

Notes for Section 4.2.

- [1] Execution time measured from receipt of the last Byte of the Command Descriptor Block (CDB) to the request for a Status Byte Transfer to the Initiator (excluding connect/disconnect).
- [2] Maximum times are specified over the worst case conditions of temperature, voltage margins and drive orientation. When comparing specified access times, care should be taken to distinguish between typical access times and maximum access times. The best comparison is obtained by system benchmark tests conducted under identical conditions. Maximum times do not include error recovery.
- [3] Typical Access times are measured under nominal conditions of temperature, voltage, and horizontal orientation as measured on a representative sample of drives.
- [4] Assumes no errors and no sector has been relocated.
- [5] Rate measured from the start of the first sector transfer to or from the Host.
- [6] Assumes system ability to support the rates listed and no cable loss.
- [7] Simulated.
- [8] Access time = controller overhead + average seek time
Access to data = controller overhead + average seek time + latency time

4.3 Start/stop time

After DC power at nominal voltage has been applied, the drive becomes ready within 20 seconds if the Motor Start Option is disabled (i.e. the motor starts as soon as the power has been applied). If a recoverable error condition is detected during the start sequence, the drive executes a recovery procedure which may cause the time to become ready to exceed 20 seconds. During spin up to ready time the drive responds to some commands over the SCSI interface in less than 3 seconds after application of power. Stop time is less than 20 seconds from removal of DC power.

If the Motor Start Option is enabled, the internal controller accepts the commands listed in the SCSI Interface Product Manual less than 3 seconds after DC power has been applied. After the Motor Start Command has been received the drive becomes ready for normal operations within 13 seconds typically (excluding an error recovery procedure). The Motor Start Command can also be used to command the drive to stop the spindle (see SCSI Interface Product Manual, 77738479).

There is no power control switch on the drive.

4.4 Prefetch/multi-segmented cache control

The drive provides prefetch (read look-ahead) and multi-segmented cache control algorithms that in many cases can enhance system performance. "Cache" as used herein refers to the drive buffer storage space when it is used in "cache" operations. To select prefetch and cache features the host sends the Mode Select command with the proper values in the applicable bytes in Mode Page 08h (see SCSI Interface Product Manual, 77738479). Prefetch and cache operation are independent features from the standpoint that each is enabled and disabled independently via the Mode Select command. However, in actual operation the prefetch feature overlaps cache operation somewhat as is noted in Section 4.5.1 and 4.5.2.

All default cache and prefetch Mode parameter values (Mode Page 08h) for standard OEM versions of this drive family are given in Tables 8a and 8b.

4.5 Cache operation

In general, 480 Kbytes of the 512 Kbytes of physical buffer space in the drive can be used as storage space for cache operations. The buffer can be divided into logical segments (Mode Select Page 08h, byte 13) from which data is read and to which data is written. The drive maintains a table of logical block disk medium addresses of the data stored in each segment of the buffer. If cache operation is enabled (RCD bit = 0 in Mode Page 08h, byte 2, bit 0. See SCSI Interface Product Manual P/N 77738479), data requested by the host with a Read command is retrieved from the buffer (if it is there), before any disc access is initiated. If cache operation is not enabled, the buffer (still segmented with required number of segments) is still used, but only as circular buffer segments during disc medium read operations (disregarding Prefetch operation for the moment). That is, the drive does not check in the buffer segments for the requested read data, but goes directly to the medium to retrieve it. The retrieved data merely passes through some buffer segment on the way to the host. On a cache "miss", all data transfers to the host are in accordance with "buffer-full" ratio rules. On a cache "hit" the drive ignores the "buffer-full" ratio rules. See explanations associated with Mode page 02h (disconnect/reconnect control) in the SCSI Interface Product Manual, 77738479.

The following is a simplified description of a read operation with cache operation enabled:

Case A - A Read command is received and the first logical block (LB) is already in cache:

1. Drive transfers to the initiator the first LB requested plus all subsequent contiguous LB's that are already in the cache. This data may be in multiple segments.
2. When the requested LB is reached that is not in any cache segment, the drive fetches it and any remaining requested LBs from the disc and puts them in a segment of the cache. The drive transfers the remaining requested LBs from the cache to the host in accordance with the disconnect/reconnect specification mentioned above.
3. If the prefetch feature is enabled, refer to Section 4.5.2 for operation from this point.

Case B - A Read command requests data, the first LB of which is not in any segment of the cache:

1. The drive fetches the requested LB's from the disc and transfers them into a segment, and from there to the host in accordance with the disconnect/reconnect specification referred to in case A.
2. If the prefetch feature is enabled, refer to Section 4.5.2 for operation from this point.

Each buffer segment is actually a self-contained circular storage (wrap-around occurs), the length of which is an integer number of disc medium sectors. The wrap-around capability of the individual segments greatly enhances the buffer's overall performance as a cache storage, allowing a wide range of user selectable configurations, which includes their use in the prefetch operation (if enabled), even when cache operation is disabled (see Section 4.5.2). The number of segments may be selected using the Mode Select command, but the size can not be directly selected. Size is selected only as a by-product of selecting the segment number specification. The size in Kbytes of each segment is not reported by the Mode Sense command page 08h, bytes 14 and 15. The value 0XFFFF is always reported. If a size specification is sent by the host in a Mode Select command (bytes 14 and 15) no new segment size is set up by the drive, and if the "STRICT" bit in Mode page 00h (byte 2, bit 1) is set to one, the drive responds as it does for any attempt to change unchangeable parameters (see SCSI I/O Product Manual 77738479). The drive supports operation of any integer number of segments from 1 to 16.

4.5.1 Caching write data

Write caching is a write operation by the drive that makes use of a drive buffer storage area where the data to be written to the medium is stored in one or more segments while the drive performs the write command.

Write caching is enabled along with read caching. For write caching, the same buffer space and segmentation is used as set up for read functions. The buffer segmentation scheme is set up or changed independently, having nothing to do with whether or not read and write caching is enabled or disabled. When a write command is issued, the cache is first checked to see if any logical blocks that are to be written are already stored in the cache from a previous read or write command. If there are, the respective cache segments are cleared. The new data is cached for subsequent Read commands.

If the number of write data logical blocks exceeds the size of the segment being written into when the end of the segment is reached, the data is written into the beginning of the same cache segment, overwriting the data that was written there at the beginning of the operation. However, the drive does not overwrite data that has not yet been written to the medium.

Tables 8a, 8b and 9a, 9b show Mode default settings for the drives.

4.5.2 Prefetch operation

If the Prefetch feature is enabled, data in contiguous logical blocks on the disc immediately beyond that which was requested by a Read command can be retrieved and stored in the buffer for immediate transfer from the buffer to the host on subsequent Read commands that request those logical blocks (this is true even if "cache" operation is disabled). Though the prefetch operation uses the buffer as a "cache", finding the requested data in the buffer is a prefetch "hit", not a "cache" operation "hit". Prefetch is enabled using Mode Select page 08h, byte 12, bit 5 (Disable Read Ahead - DRA bit). DRA bit = 0 enables prefetch. Since data that is prefetched replaces data already in some buffer segment(s), the host can limit the amount of prefetch data to optimize system performance. The max prefetch field (bytes 8 and 9) limits the amount of prefetch. The drive does not use the prefetch "ceiling" field (bytes 10 and 11).

During a prefetch operation, the drive crosses a cylinder boundary to fetch more data only if the Discontinuity (DISC) bit is set to one in bit 4 of byte 2 of Mode parameters page 08h.

Whenever prefetch (read look-ahead) is enabled (enabled by DRA = 0), it operates under the control of ARLA (Adaptive Read Look-Ahead). If the host uses software interleave, ARLA enables prefetch of contiguous blocks from the disc when it senses that a prefetch “hit” will likely occur, even if two consecutive read operations were not for physically contiguous blocks of data (e.g. “software interleave”). ARLA disables prefetch when it decides that a prefetch “hit” will not likely occur. If the host is not using software interleave, and if two sequential read operations are not for contiguous blocks of data, ARLA disables prefetch, but as long as sequential read operations request contiguous blocks of data, ARLA keeps prefetch enabled.

5.0 Reliability specifications

The following reliability specifications assume correct host/drive operational interface, including all interface timings, power supply voltages, environmental requirements and drive mounting constraints (see Section 8.4).

Seek Errors	Less than 10 in 10^8 seeks
Read Error Rates [1]	
Recovered Data	Less than 10 errors in 10^{11} bits transferred (OEM default settings)
Unrecovered Data	Less than 1 sector in 10^{14} bits transferred (OEM default settings)
Miscorrected Data	Less than 1 sector in 10^{21} bits transferred
MTBF	1,000,000 hours
Service Life	5 years
Preventive Maintenance	None required

Note.

[1] Error rate specified with automatic retries and data correction with ECC enabled and all flaws reallocated.

5.1 Error rates

The error rates stated in this specification assume the following:

- The drive is operated per this specification using DC power as defined in this manual (see Section 6.2).
- The drive has been formatted with the SCSI FORMAT commands.
- Errors caused by media defects or host system failures are excluded from error rate computations. Refer to Section 3.2, "Media Characteristics."

5.1.1 Environmental interference

When evaluating systems operation under conditions of Electromagnetic Interference (EMI), the performance of the drive within the system shall be considered acceptable if the drive does not generate an unrecoverable condition.

An unrecoverable error, or unrecoverable condition, is defined as one that:

- Is not detected and corrected by the drive itself;
- Is not capable of being detected from the error or fault status provided through the drive or SCSI interface; or
- Is not capable of being recovered by normal drive or system recovery procedures without operator intervention.

5.1.2 Read errors

Before determination or measurement of read error rates:

- The data that is to be used for measurement of read error rates must be verified as being written correctly on the media.
- All media defect induced errors must be excluded from error rate calculations.

5.1.3 Write errors

Write errors can occur as a result of media defects, environmental interference, or equipment malfunction. Therefore, write errors are not predictable as a function of the number of bits passed.

If a write error unrecoverable occurs because of an equipment malfunction in the drive, the error is classified as a failure affecting MTBF. Unrecoverable write errors are those which cannot be corrected within two attempts at writing the record with a read verify after each attempt (excluding media defects).

5.1.4 Seek errors

A seek error is defined as a failure of the drive to position the heads to the addressed track. There shall be no more than one recoverable seek errors in 10^7 physical seek operations. After detecting an initial seek error, the drive automatically performs an error recovery process. If the error recovery process fails, a seek positioning error (15h) is reported with a Medium error (3h) or Hardware error (4h) reported in the Sense Key. This is an unrecoverable seek error. Unrecoverable seek errors are classified as failures for MTBF calculations. Refer to Section 5.1.1.4 of SCSI-2 Interface Product Manual P/N 77738479 for Request Sense information.

5.2 Reliability and service

You can enhance the reliability of Barracuda 4LP disc drives by ensuring that the drive receives adequate cooling. Section 6.4.1 provides temperature measurements and other information that may be used to enhance the service life of the drive. Section 8.3.1 provides recommended air-flow information.

5.2.1 Mean time between failure

The production disc drive shall achieve an MTBF of 1,000,000 hours when operated in an environment that ensures the case temperatures specified in Section 6.4.1, Table 3, Column 2 are not exceeded. Short-term excursions up to the specification limits of the operating environment will not affect MTBF performance.

The following expression defines MTBF

$$\text{MTBF per measurement period} = \frac{\text{Estimated power-on operating hours in the period}}{\text{Number of drive failures in the period}}$$

Estimated power-on operation hours means power-up hours per disc drive times the total number of disc drives in service. Each disc drive shall have accumulated at least nine months of operation. Data shall be calculated on a rolling average base for a minimum period of six months.

Drive failure means any stoppage or substandard performance caused by drive malfunction.

5.2.2 Preventive maintenance

No routine scheduled preventive maintenance shall be required.

5.2.3 Service life

The drive shall have a useful service life of five years. Depot repair or replacement of major parts is permitted during the lifetime (see Section 5.2.4).

5.2.4 Service philosophy

Special equipment is required to repair the drive HDA. In order to achieve the above service life, repairs must be performed only at a properly equipped and staffed service and repair facility. Troubleshooting and repair of PCBs in the field is not recommended, because of the extensive diagnostic equipment required for effective servicing. Also, there are no spare parts available for this drive. Drive warranty is voided if the HDA is opened.

5.2.5 Service tools

No special tools are required for site installation or recommended for site maintenance. Refer to Section 5.2.4. The depot repair philosophy of the drive precludes the necessity for special tools. Field repair of the drive is not practical since there are no user purchasable parts in the drive.

5.2.6 Hot plugging Barracuda 4LP disc drives

Caution: Hot-plug drives are not designed for simultaneous power disconnection and physical removal.

During power-up and power-down periods, the hot SCSI connect/disconnect capability does not produce glitches or any corruptions on an active SCSI bus. Barracuda 4LP drives conform to the SCSI-3 standard requirements for glitch-free power-on and power-off. The drive maintains the high-impedance state of the device connector contacts during a power cycle until the transceiver is enabled.

Note. The systems integrator must ensure that no temperature, energy, voltage hazard, or ESD potential is presented during the hot connect/disconnect operation.

Procedure:

1. Configure the drive with no connection between the drive and the TRMPWR signal on the SCSI bus. To accomplish this, remove all jumpers from connector J2 pins 1, 2, 3, and 4.
2. Ensure that all SCSI devices on the bus have receivers that conform to the SCSI-3 standard.
3. Eliminate all I/O processes for the drive.
4. Wait until the drive motor and discs have come to a complete stop prior to changing the plane of operation, ensuring data integrity.
5. Insert or remove the drive after meeting the following conditions:

Caution: Do not hot-plug the first or last device on the SCSI bus (the SCSI bus termination must be external to the drive you are inserting or removing).

- a. If you are inserting the drive, connect its power ground and logic ground at least 1 millisecond before coming into contact with the bus connector. Maintain these ground connections during and after connecting the device to the bus.
- b. If you are removing the device, maintain its power ground and logic ground connection for at least 1 millisecond after disconnecting the device from the bus.
- c. You may simultaneously switch the power to the electronics and mechanics of the drive with the bus contacts, if the power distribution system is able to maintain adequate power stability to other devices during the transition and if you have met the grounding requirements given in steps 5a and 5b.
- d. Ensure that the drive carrier discharges all static electricity prior to inserting the drive into the system.

Note. Do not remove or add terminator power or resistance to the SCSI bus while hot plugging a disc drive.

5.2.7 S.M.A.R.T.

This feature not implemented by this drive family.

5.2.8 Product warranty

Beginning on the date of shipment to customer and continuing for a period of five years, Seagate warrants that each product (including components and subassemblies) or spare part that fails to function properly under normal use due to defect in materials or workmanship or due to nonconformance to the applicable specifications will be repaired or replaced, at Seagate's option and at no charge to customer, if returned by customer at customer's expense to Seagate's designated facility in accordance with Seagate's Warranty Procedure. Seagate will pay for transporting the repair or replacement item to customer. For more detailed warranty information refer to the Standard terms and conditions of Purchase for Seagate products.

Shipping

When transporting or shipping a drive, a Seagate approved container must be used. Keep your original box. They are easily identified by the Seagate Approved Package label. Shipping a drive in a non-approved container voids the drive warranty.

Seagate repair centers may refuse receipt of components improperly packaged or obviously damaged in transit. Contact your Authorized Seagate Distributor to purchase additional boxes. Seagate recommends shipping by an air-ride carrier experienced in handling computer equipment.

Product repair and return information

Seagate customer service centers are the only facilities authorized to service Seagate drives. Seagate does not sanction any third-party repair facilities. Any unauthorized repair or tampering with the factory-seal voids the warranty.

6.0 Physical/electrical specifications

This section provides information relating to the physical and electrical characteristics of the Barracuda 4LP drive.

6.1 AC power requirements

None

6.2 DC power requirements

The voltage and current requirements for a single drive are shown in the following table. Values indicated apply at the drive power connector. The single ended power requirements includes the internal disc drive SCSI I/O termination. The table shows current values in Amperes.

Table 2: DC power requirements

	Notes	ST34371/ST34571				ST32171/ST32271			
		N/W/WC Single-ended		WD/DC Differential		N/W/WC Single-ended		WD/DC Differential	
Voltage		+5 V	+12 V	+5 V	+12 V	+5 V	+12 V	+5 V	+12 V
Regulation	[5]	±5%	±5%[2]	±5%	±5%[2]	±5%	±5%[2]	±5%	±5%[2]
Maximum operating current DC3 σ	[1]	0.81	0.95	1.21	0.95	0.81	0.85	1.21	0.85
Average idle current DC \bar{X}	[1]	0.46	0.54	0.70	0.54	0.46	0.52	0.70	0.52
Maximum starting current (peak DC) DC3 σ (peak AC) AC3 σ	[3] [3]	0.78	2.44 3.1	1.1	2.44 3.1	0.78	2.00 3.1	1.1	2.00 3.1
Delayed motor start (max) DC3 σ	[1][4]	0.48	0.20	0.90	0.20	0.50	0.20	0.90	0.20
Peak operating current Typical DC \bar{X} Maximum DC3 σ Maximum (Peak) 3 σ	[1][6] [1][6]	0.75 0.81 1.5	0.76 0.95 2.5	1.05 1.21 2.0	0.76 0.95 2.5	0.72 0.81 1.5	0.73 0.85 2.3	0.91 1.21 2.0	0.73 0.85 2.3

Notes.

- [1] Measured with average reading DC ammeter. Instantaneous +12 V current peaks will exceed these values.
- [2] A -10% droop is permissible during initial start of spindle, and must return to ±5% before 7,200 rpm is reached. The ±5% must be maintained after the drive signifies that its power-up sequence has been completed and that the drive is able to accept selection by the host initiator.
- [3] See +12 V current profile in Figure 3.
- [4] This condition occurs when the Motor Start Option is enabled and the drive has not yet received a Start Motor command.
- [5] See Section 6.2.1 "Conducted Noise Immunity." Specified voltage tolerance is inclusive of ripple, noise, and transient response.
- [6] Operating condition is defined as random seek read operations with a block count of 64 and SCSI disconnect enabled.
- [7]

General Notes from Table 2:

1. Minimum current loading for each supply voltage is not less than 4% of the maximum operating current shown.
2. The +5 and +12 volt supplies shall employ separate ground returns.
3. Where power is provided to multiple drives from a common supply, careful consideration for individual drive power requirements should be noted. Where multiple units are powered on simultaneously, the peak starting current must be available to each device.

6.2.1 Conducted noise immunity

Noise is specified as a periodic and random distribution of frequencies covering a band from DC to 10 MHz. Maximum allowed noise values given below are peak to peak measurements and apply at the drive power connector.

+5 V = 150 mV pp from 0 to 100 kHz and 100 mV pp from 100 kHz to 10 MHz.

+12 V = 150 mV pp from 0 to 100 kHz and 100 mV pp from 100 kHz to 10 MHz.

6.2.2 Power sequencing

The drive does not require power sequencing. The drive protects against inadvertent writing during power-up and down. Daisy-chain operation requires that power be maintained on the terminated drive to ensure proper termination of the peripheral I/O cables. To automatically delay motor start based on the target ID (SCSI ID) enable the Delay Motor Start option and disable the Enable Motor Start option on the J2 connector. See Section 8.1 for pin selection information. To delay the motor until the drive receives a Start Unit command, enable the Enable Motor Start option on the J2 connector.

6.2.3 12 V - Current profile

Figure 3 identifies the drive +5 V and +12 V current profile. The current during the various times is as shown:

- T - Power is applied to the drive.
- T1 - Controller self tests are performed.
- T2 - Spindle begins to accelerate under current limiting after performing drive internal diagnostics. See Note 1 of Table 2.
- T3 - The heads move from the landing zone to the data area.
- T4 - The adaptive servo calibration sequence is performed.
- T5 - Calibration is complete and the drive is ready for reading and writing.

Note. All times and currents are typical. See Table 2 for maximum current requirements.

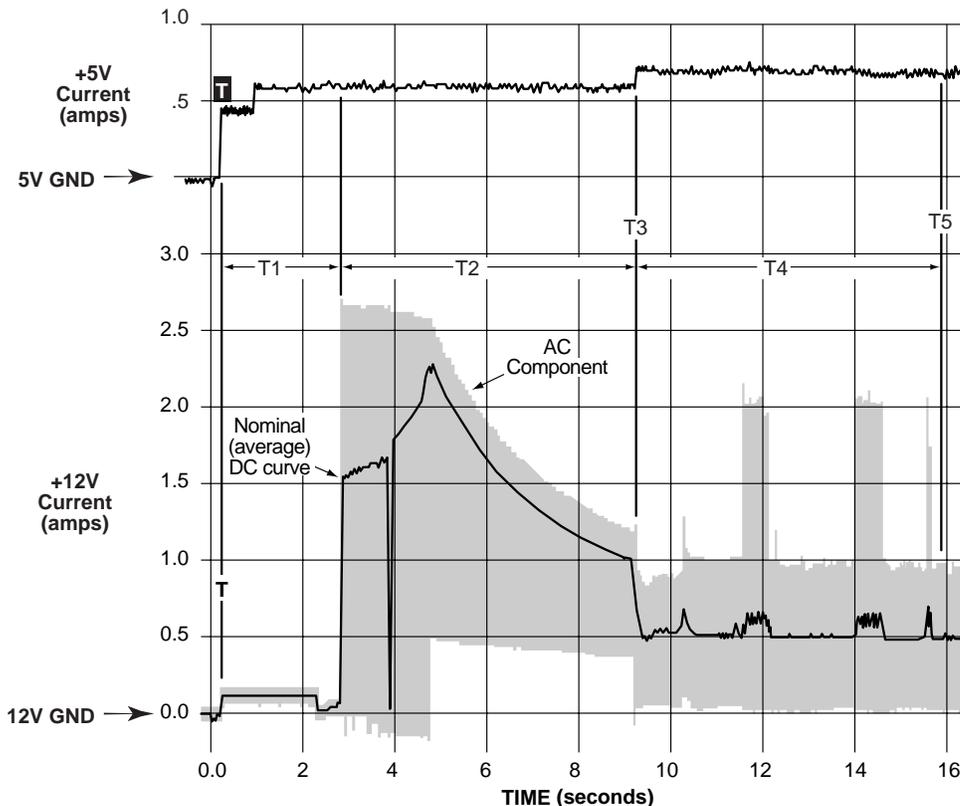


Figure 3. Typical Barracuda 4LP family drive +5 V and +12 V current profile

6.3 Power dissipation

For drives with single ended interface circuits, typical operating random read power dissipation is 12.9 watts (44 BTUs per hour) of DC power average at nominal voltages. Typical power dissipation under idle conditions is 8.8 watts (30 BTUs per hour).

For drives with differential interface circuits, typical operating random read power dissipation is 14.4 watts (49 BTUs per hour) of DC power average at nominal voltages. Typical power dissipation under idle conditions is 10 watts (34 BTUs per hour).

6.4 Environmental limits

Temperature and humidity values experienced by the drive must be such that condensation does not occur on any drive part. Altitude and atmospheric pressure specifications are referenced to a standard day at 58.7°F (14.8°C). Maximum Wet Bulb temperature is 82°F (28°C).

6.4.1 Temperature

a. Operating

The drive meets all specifications over a 41°F to 122°F (5°C to 50°C) drive ambient temperature range with a maximum temperature gradient of 36°F (20°C) per hour. The enclosure for the drive should be designed such that the temperatures at the locations specified in Table 3, column 1 are not exceeded. Air flow may be needed to achieve these temperature values. Operation at case temperatures [3] above these values may adversely affect the drives ability to meet specifications.

The MTBF specification for the drive is based on operating in an environment that ensures that the case temperatures specified in Table 3, column 2 are not exceeded. Occasional excursions to drive ambient temperatures of 122°F (50°C) or 41°F (5°C) may occur without impact to specified MTBF. To achieve the specified MTBF, the values of Table 3, column 2 must be considered maximum average operating case temperatures and the enclosure for the drive should be designed such that those temperature values are not exceeded. Air flow may be needed to achieve these temperatures. Continual or sustained operation at case temperatures above these values may degrade MTBF.

To confirm that the required cooling for the Barracuda electronics and HDA is provided, place the drive in its final mechanical configuration, perform random write/read operations typical of expected normal operation. After the temperatures stabilize, measure the case temperature of the components listed in Table 3.

Operation of the drive at the maximum case temperature is intended for short time periods only. Continuous operation at the elevated temperatures will reduce product reliability. See also Section 8.3, "Cooling."

Table 3: PCB and HDA temperatures

Items in Figure 4	Column 1 Maximum Case Temperatures (°C) Operating (50° Ambient) [1]	Column 2 MTBF 1 Million Hours Case Temperatures (°C)
HDA [2]	60	45
U2 [3]	81	61
U4 [3]	84	64
U5 [3]	90	70
U13 [3]	79	59

Note.

[1] The temperatures in Column 1 are calculated and may not reflect actual operating values. Sufficient cooling air may be required to ensure that these values are not exceeded.

[2] Measure HDA temp at point labeled "HDA" on Figure 4.

[3] PCB mounted integrated circuit case.

b. Non-Operating

−40° to 158°F (−40° to 70°C) package ambient with a maximum gradient of 45°F (25°C) per hour. This specification assumes that the drive is packaged in the shipping container designed by Seagate for use with drive.

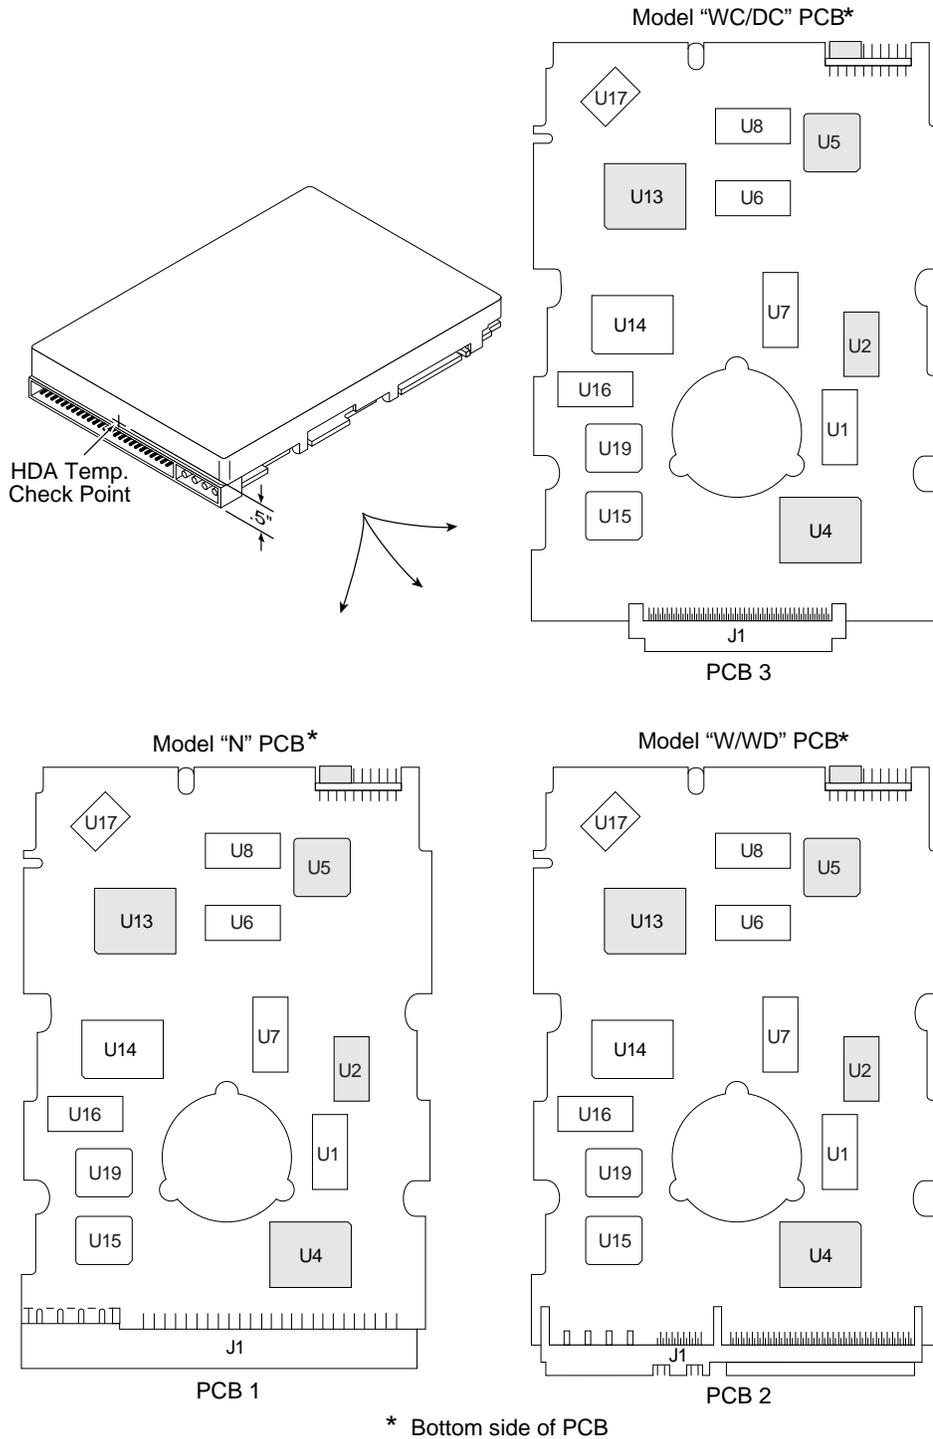


Figure 4. Locations of PCB components listed in Table 3

6.4.2 Relative humidity

The values below assume that no condensation on the drive occurs.

- a. Operating
 - 5% to 90% relative humidity with a maximum gradient of 10% per hour.
- b. Non-Operating
 - 5% to 95% relative humidity.

6.4.3 Effective altitude (sea level)

- a. Operating
 - 1,000 to +10,000 feet (–305 to +3,048 meters)
- b. Non-Operating
 - 1,000 to +40,000 feet (–305 to +12,210 meters)

6.4.4 Shock and vibration

Shock and vibration limits specified in this document are measured directly on the drive chassis. If the drive is installed in an enclosure to which the stated shock and/or vibration criteria is applied, resonances may occur internally to the enclosure resulting in drive movement in excess of the stated limits. If this situation is apparent, it may be necessary to modify the enclosure to minimize drive movement.

The limits of shock and vibration defined within this document are specified with the drive mounted by any of the four methods shown in Figure 5, and in accordance with the restrictions of Section 8.4. Orientation of the side nearest the LED may be up or down.

6.4.4.1 Shock

a. Operating—normal

The drive, as installed for normal operation, shall operate error free while subjected to intermittent shock not exceeding 2 g's at a maximum duration of 11 ms (half sinewave). Shock may be applied in the X, Y, or Z axis.

b. Operating—abnormal

Equipment, as installed for normal operation, does not incur physical damage while subjected to intermittent shock not exceeding 10 g's at a maximum duration of 11 ms (half sinewave). Shock occurring at abnormal levels may promote degraded operational performance during the abnormal shock period. Specified operational performance will continue when normal operating shock levels resume. Shock may be applied in the X, Y, or Z axis. Shock is not to be repeated more than two times per second.

c. Non-operating

The limits of non-operating shock shall apply to all conditions of handling and transportation. This includes both isolated drives and integrated drives.


The drive subjected to nonrepetitive shock not exceeding 75 g's at a maximum duration of 11 ms (half sine-wave) shall not exhibit device damage or performance degradation. Shock may be applied in the X, Y, or Z axis.

The drive subjected to nonrepetitive shock not exceeding 100 g's at a maximum duration of 2 msec (half sinewave) does not exhibit device damage or performance degradation. Shock may be applied in the X, Y, or Z axis.

d. Packaged

Disc drives shipped as loose load (not palletized) general freight will be packaged to withstand drops from heights as defined in the table below. For additional details refer to Seagate specifications 30190-001 (under 100 lbs/45 kg) or 30191-001 (over 100 lbs/45 Kg).

Package Size	Packaged/Product Weight	Drop Height
<600 cu in (<9,800 cu cm)	Any	60 in (1524 mm)
600-1800 cu in (9,800-19,700 cu cm)	0-20 lb (0 to 9.1 kg)	48 in (1219 mm)
>1800 cu in (>19,700 cu cm)	0-20 lb (0 to 9.1 kg)	42 in (1067 mm)
>600 cu in (>9,800 cu cm)	20-40 lb (9.1 to 18.1 kg)	36 in (914 mm)

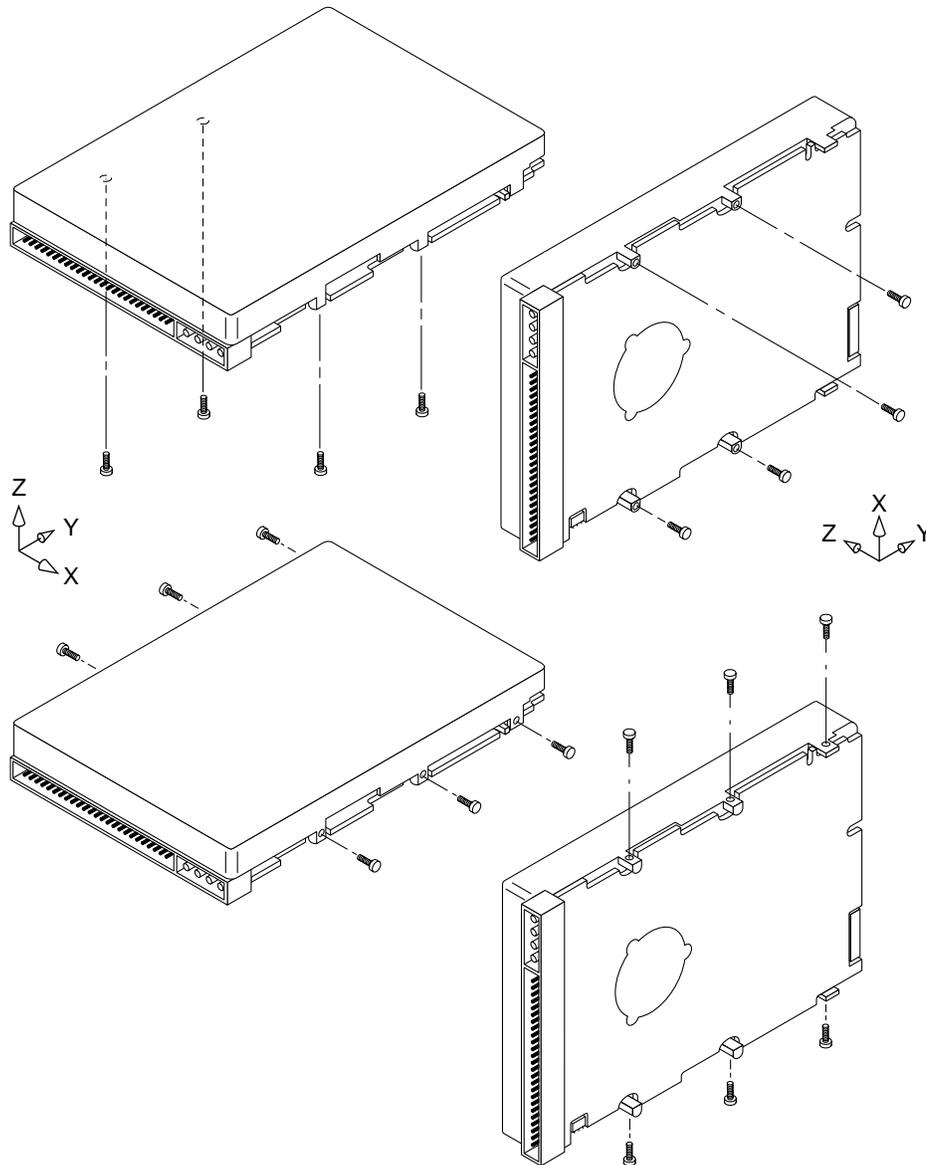

Note. Use four screws (two per side) when using the mounting holes located on the sides of the drive. See Section 8.4 when using the mounting holes located on the bottom of the drive.

Figure 5. Recommended mounting

6.4.4.2 Vibration

a. Operating - normal

The drive as installed for normal operation, shall comply with the complete specified performance while subjected to continuous vibration not exceeding

5-350 Hz @ 0.5 g

Vibration may be applied in the X, Y, or Z axis.

b. Operating - abnormal

5-350 Hz @ 0.75 g (X, Y, or Z axis)

c. Non-operating

The limits of non-operating vibration shall apply to all conditions of handling and transportation. This includes both isolated drives and integrated drives.

The drive shall not incur physical damage or degraded performance as a result of continuous vibration not exceeding

5-22 Hz @ 0.081 inches (2.05 mm) displacement

22-350 Hz @ 2.00 g

Vibration may be applied in the X, Y, or Z axis.

6.4.5 Air cleanliness

The drive is designed to operate in a typical office environment with minimal environmental control.

6.4.6 Acoustics

Sound power during idle mode shall be 4.2 bels typical when measured to Seagate's 30553-001 specification.


6.4.7 Electromagnetic susceptibility

See Section 2.1.1.1.

6.5 Mechanical specifications


The following nominal dimensions are exclusive of the decorative front panel accessory. However, dimensions of the front panel are shown in figure below. Refer to Figures 6a, 6b, and 6c for detailed mounting configuration dimensions. See Section 8.4, "Drive mounting."

Height:	1.00 in	25.4 mm
Width:	4.00 in	101.6 mm
Depth:	5.74 in	145.8 mm
Weight:	1.5 pounds	0.68 kilograms

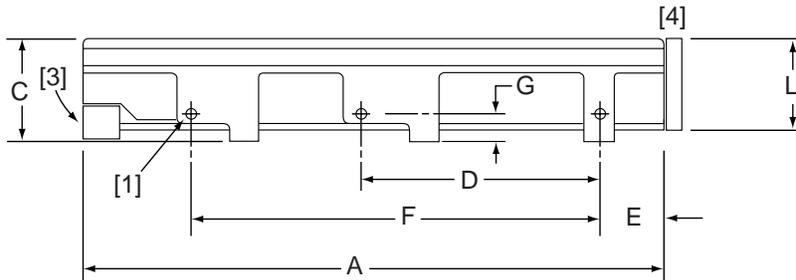

Notes:

- [1] Mounting holes three on each side, 6-32 UNC. Max screw length into side of drive 0.15 in. (3.81 mm). Screw tightening torque 6.0 in-lb (.675 NM) max with minimum thread engagement of 0.12 in. (3.05 mm).
- [2] Mounting holes four on bottom, 6-32 UNC. Max screw length into bottom of drive 0.15 in. (3.81 mm). Screw tightening torque 6.0 in-lb (.675 NM) max with minimum thread engagement of 0.12 in. (3.05 mm).
- [3] Power and interface connectors can extend past the "A" dimension by 0.040 in. (1.02 mm).
- [4] Decorative front panel (optional).
- [5] Centerline of pad for Pin 1 of power connector.
- [6] Centerline of pad for Pin 1 of J6.
- [7] Centerline of pad for Pin 1 of J2.
- [8] Dimensions to Pin 1 of each connector are nominal values.

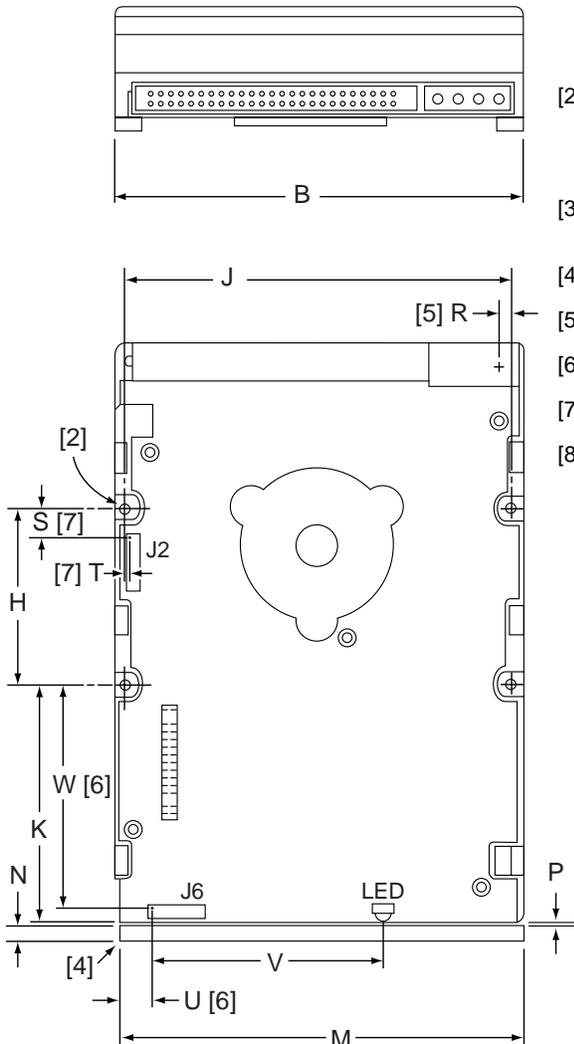

Dimension Table

	Inches	Millimeters
A	5.74 ± .010	145.80 ± .25
B	4.00 ± .010	101.60 ± .25
C	1.00 + .021 - .009	25.40 + .53 - .22
D	2.362 ± .010	60.00 ± .25
E	.620 ± .020	15.75 ± .50
F	4.000 ± .010	101.60 ± .25
G	.250 + .010 - .005	6.35 + .25 - .12
H	1.750 ± .010	44.45 ± .25
J	3.750 ± .010	95.25 ± .25
K	2.370 ± .020	60.20 ± .50
L	1.00 ± .010	25.4 ± .25
M	4.000 ± .010	101.6 ± .25
N	0.19 ± .010	4.83 ± .25
P	0.015 max	0.381 max
R	0.143	3.63
S	0.260	6.60
T	0.030	0.76
U	0.386	9.80
V	2.265	57.53
W	2.075	52.71

Figure 6a. Mounting configuration dimensions for models "N"




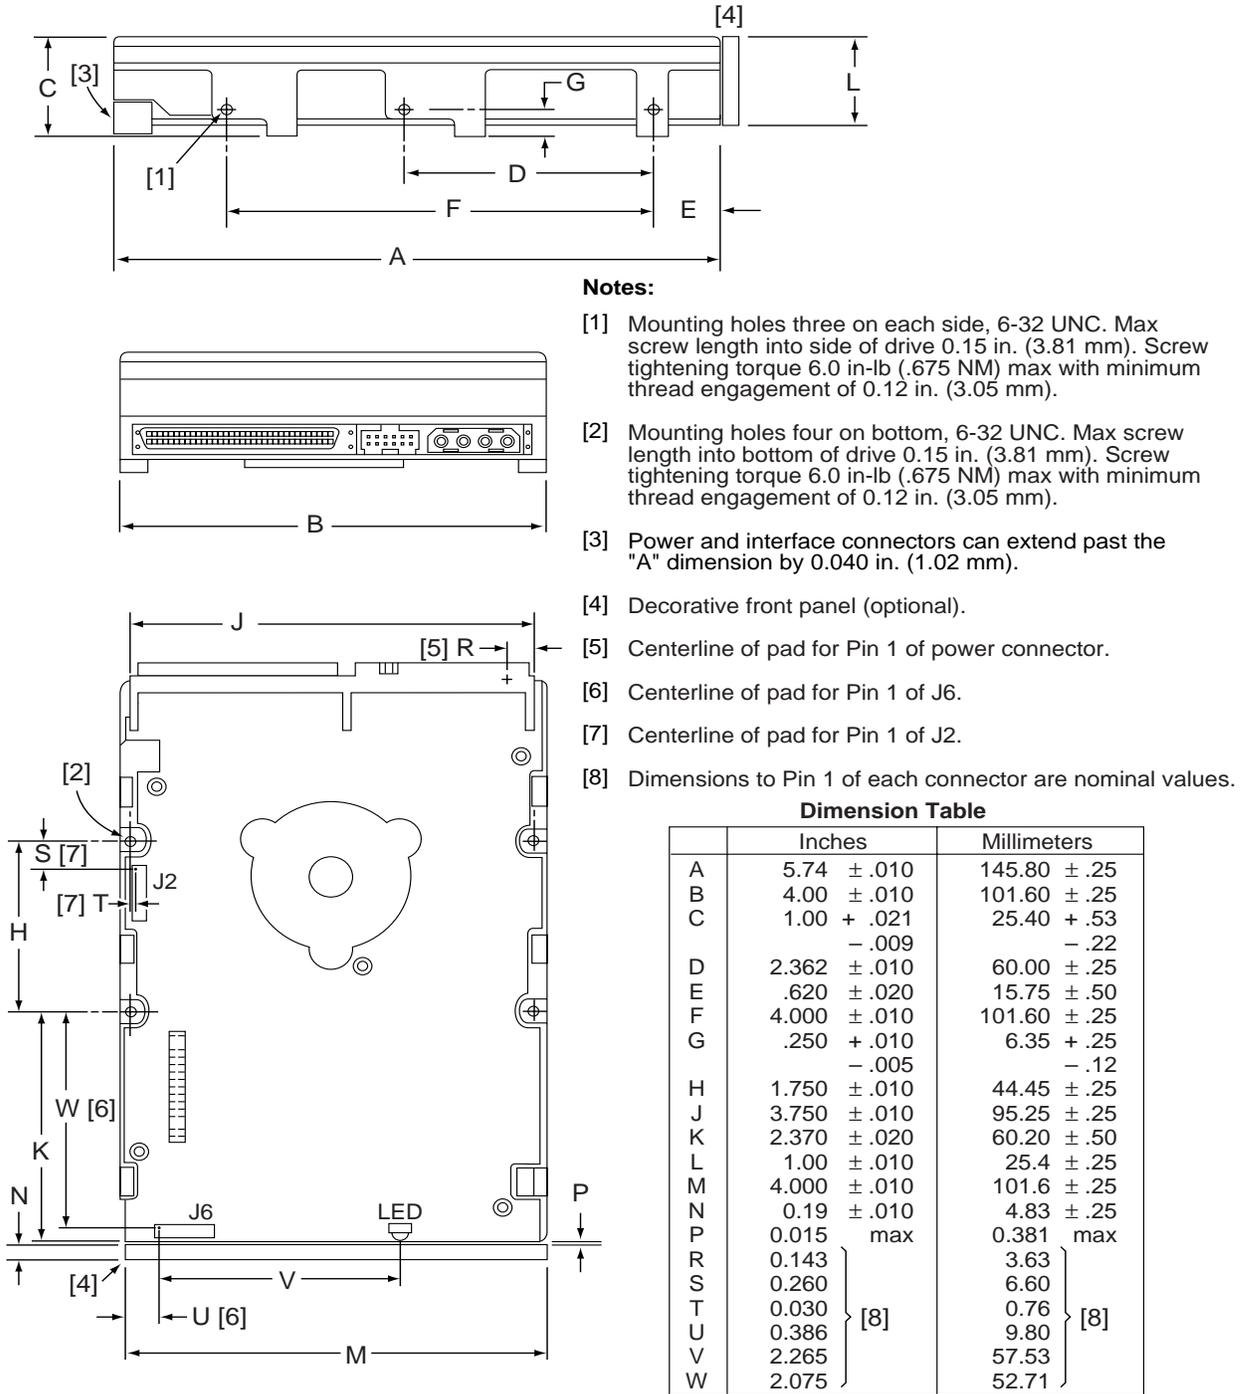


Figure 6b. Mounting configuration dimensions for models "W" and "WD"

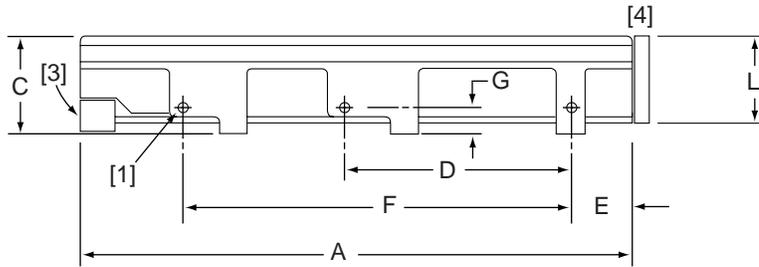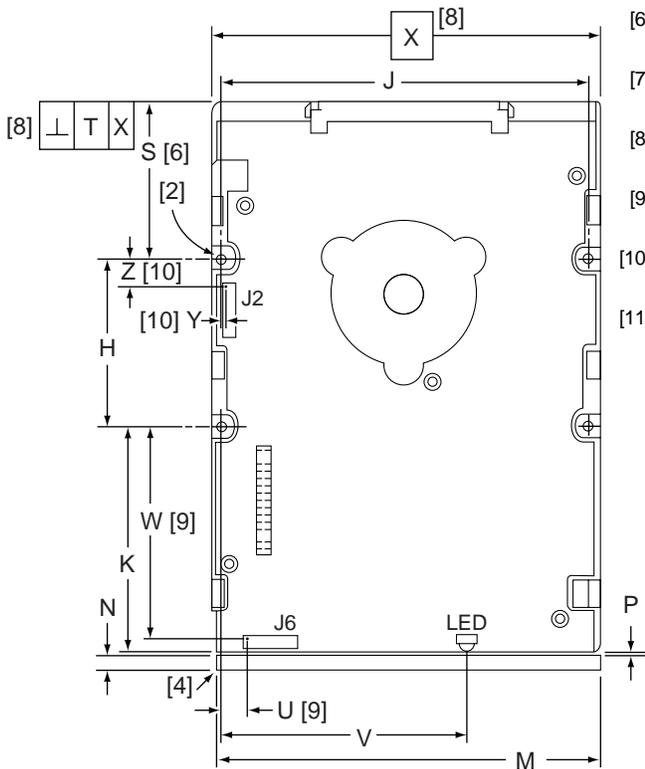

Notes:

- [1] Mounting holes three on each side, 6-32 UNC. Max screw length into side of drive 0.15 in. (3.81 mm). Screw tightening torque 6.0 in-lb (.675 NM) max with minimum thread engagement of 0.12 in. (3.05 mm).
- [2] Mounting holes four on bottom, 6-32 UNC. Max screw length into bottom of drive 0.15 in. (3.81 mm). Screw tightening torque 6.0 in-lb (.675 NM) max with minimum thread engagement of 0.12 in. (3.05 mm).
- [3] Interface connector is flush with the end of drive within ± 0.020 in. (.5 mm). The interface connector location may extend beyond HDA dimension "A" by 0.020 in. (.5 mm).
- [4] Decorative front panel (optional).
- [5] Connector J1 is centered (side to side) on drive within ± 0.020 in. (.508 mm).
- [6] Dimension "S" is from bottom rear drive mounting holes center(s) to the face of the connector at the center of the drive.
- [7] Dimensions "S" and "T" are unique requirements for SCA drives only, required for conformance with latest SFF Spec #8337.
- [8] Maximum connector non-perpendicularity to side planes pointed to by X.
- [9] Centerline of pad for Pin 1 of J6. Pin ends on J6 are nominally flush with end of drive.
- [10] Centerline of pad for Pin 1 of J2. Dimensions indicated are for reference only.
- [11] Dimensions to Pin 1 of each connector are nominal values.

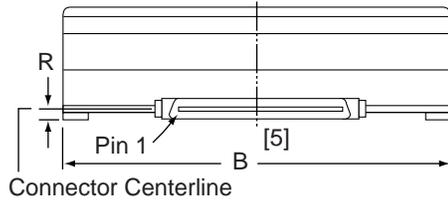

Dimension Table

	Inches	Millimeters
A	5.74 ± .010	145.80 ± .25
B	4.00 ± .010	101.60 ± .25
C	1.00 + .021	25.40 + .53
	- .009	- .22
D	2.362 ± .010	60.00 ± .25
E	.620 ± .020	15.75 ± .50
F	4.000 ± .010	101.60 ± .25
G	.250 + .010	6.35 + .25
	- .005	- .12
H	1.750 ± .010	44.45 ± .25
J	3.750 ± .010	95.25 ± .25
K	2.370 ± .020	60.20 ± .50
L	1.00 ± .010	25.4 ± .25
M	4.000 ± .010	101.6 ± .25
N	0.19 ± .010	4.83 ± .25
P	0.015 max	0.381 max
R	0.181 + .015	4.597 + .38
	- .010	- .25
[7] S	1.62 ± .02	41.15 ± .50
[8] T	.015	.38
U	0.386	9.80
V	2.265	57.53
W	2.075	52.71
Y	0.03	0.76
Z	0.26	0.60

Figure 6c. Mounting configuration dimensions for models "WC" and "DC"

7.0 Defect and error management

The drive, as delivered, complies with this specification. The read error rate and specified storage capacity are not dependent upon use of defect management routines by the host (initiator).

Defect and error management in the SCSI system involves the drive internal defect/error management and SCSI systems error considerations (errors in communications between Initiator and the drive). Tools for use in designing a defect/error management plan are briefly outlined in this section, with references to other sections where further details are given.

7.1 Drive internal defects and errors

Identified defects are recorded on the drive defects list tracks (referred to as the primary or ETF defect list). These known defects are reallocated during the initial drive format operation at the factory. (See Section 5.2.1.2, "Format Unit command" in *SCSI Interface Product Manual*, part number 77738479). Data correction by ECC will be applied to recover data from additional flaws if they occur.

Details of the SCSI commands supported by the drive are described in *SCSI Product Interface Manual*.

7.2 SCSI systems errors

Information on the reporting of operational errors or faults across the interface is given in the *SCSI Interface Product Manual*. Message Protocol System is described in the *SCSI Interface Product Manual*. Several of the messages are used in the SCSI systems error management system. The Request Sense command returns information to the host about numerous kinds of errors or faults. The Receive Diagnostic Results reports the results of diagnostic operations performed by the drive.

Status returned by the drive to the Initiator is described in the *SCSI Interface Product Manual*. Status reporting plays a role in the SCSI systems error management and its use in that respect is described in sections where the various commands are discussed.

8.0 Installation

The first thing to do when installing a drive is to set the drive ID (select) on the SCSI bus and set up certain operating options. This is usually done by installing small shorting jumpers on the pins of connectors J2 and J6 on the PCB (or J1-Auxiliary on the “W” and “WD” models), or via the drive to host I/O signals on “WC” and “DC” models. Some users connect cables to J6 or J1-Auxiliary and perform the set-up using remote switches.

If your system is “SCAM” (SCSI Configured Auto Magically) compliant, the system assigns the drive ID over the interface, so there is no need to be concerned about drive ID. Setting the drive ID jumpers doesn’t hurt anything, but is not necessary.

If your system is not “SCAM” compliant you do need to set the drive ID using the ID jumpers.

Configure drive options

For option jumper locations and definitions refer to Figures 7a, 7b, 7c, 7d, and 7e. Drive default mode parameters are not normally needed for installation. Refer to Section 9.3.2 for default mode parameters if they are needed.

- Ensure that the SCSI ID of the drive is not the same as the host adapter. Most host adapters use SCSI ID 7. ID 7 is the highest priority on both 8 and 16 bit data buses.
- If multiple devices are on the bus set the drive SCSI ID to one that is not presently used by other devices on the bus.
- If the drive is the only device on the bus, attach it to the end of the SCSI bus cable. Permanently installed terminators must be enabled on the drive for “N” and “W” models using jumper plug **TE** if termination is not provided by the host equipment. On model “WC,” “WD,” and “DC” models, external terminators must be provided by the user, systems integrator or host equipment manufacturer.
- If the drive is attached to a bus that contains other devices, and the new drive is not attached to the end of the bus, the Terminator Enable jumper (**TE**) should be removed from the new drive.

Note. For additional information about terminator requirements, refer to Sections 9.8 and 9.9.

- Set all appropriate option jumpers for desired operation prior to power on. If jumpers are changed after power has been applied, recycle the drive power to make the new settings effective.
- Installation instructions are provided by host system documentation or with any additionally purchased drive installation software. If necessary see Section 10 for Seagate support services telephone numbers.
- Do not remove the manufacturer’s installed labels from the drive and do not cover with additional labels, as the manufacturer labels contain information required when servicing the product.

Formatting

- It is not necessary to low level format this drive. The drive is shipped from the factory low level formatted in 512 byte sectors.
- Reformat the drive if a different spare sector allocation scheme is selected.
- High level format the drive involves assigning one or more partitions or logical drives to the drive volume. Follow the instructions in the system manuals for the system into which the drive is to be installed.
- Systems that have Windows 95 Operating System version 950B (this has FAT 32) or later do not need to partition the drive.

8.1 Drive ID/option select header

Figures 7a through 7c show views of the drive ID select jumper connectors. Figure 7d shows the option select jumper connector for all models. Figure 7b shows a rear view of model drives for the purpose of showing J1-auxiliary of the drive. Both J1-auxiliary and J6 have pins for selecting drive ID and for connecting the remote LED cable. Only one or the other should be used, although using both at the same time would not damage the drive. The notes following the figures describe the functions of the various jumper positions on the connectors J2, J1-Auxiliary and J6. Suggested part number for the jumpers used on J1-Auxiliary and J6 are Methos Electronics 861M-202-70 (Seagate P/N 15481851). Suggested part number for the jumpers used on J2 is Molex 52747-0211 (Seagate P/N 77679052). A bag with the two jumper plug types is shipped with the standard OEM drives.

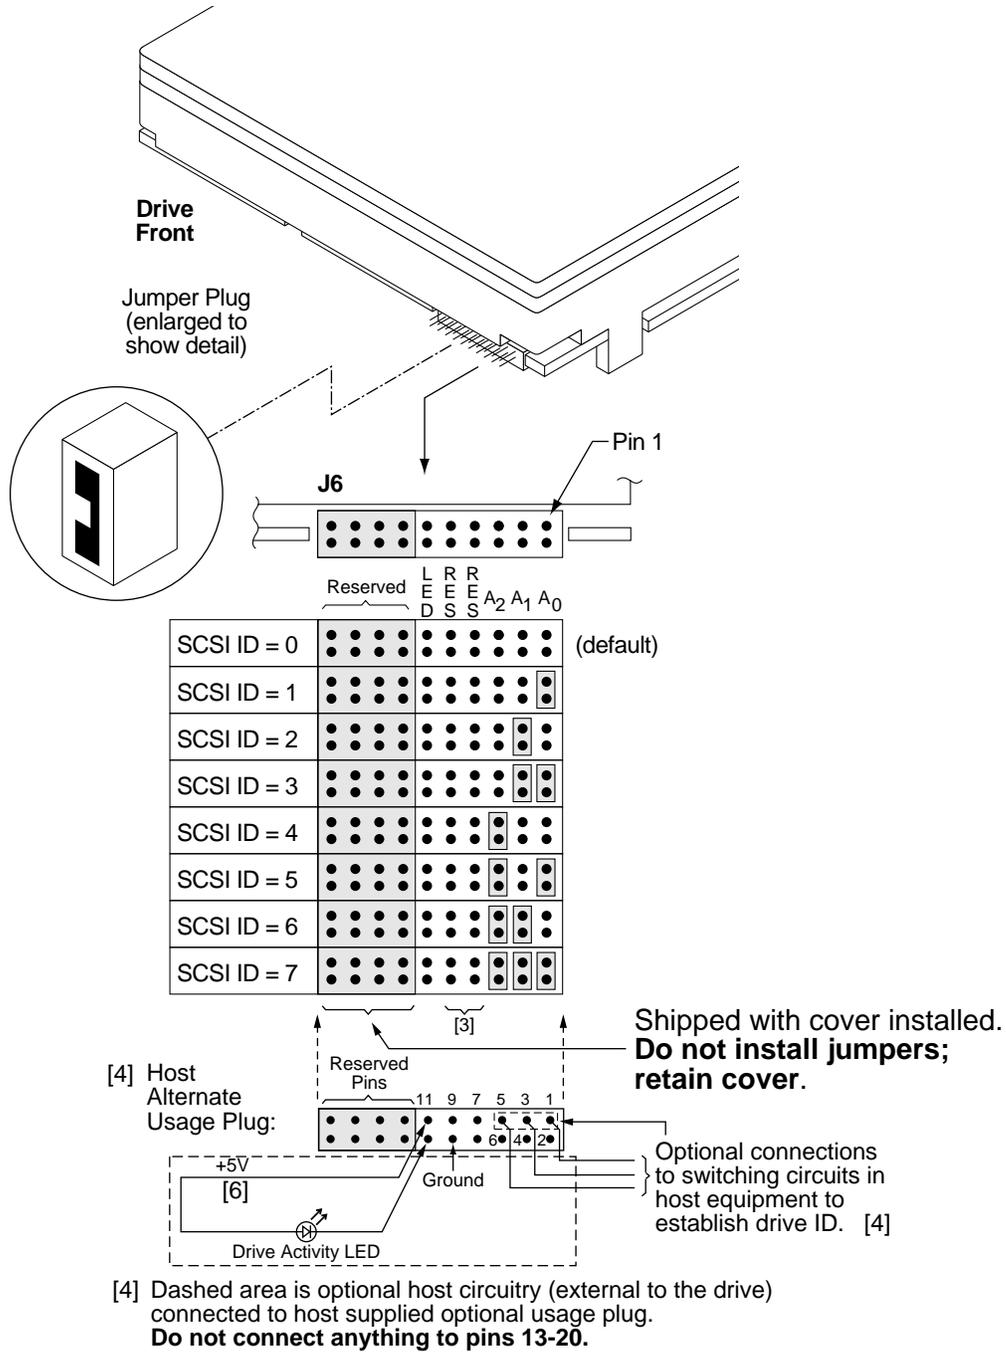


Figure 7a. Barracuda 4LP family drive ID select header for models “N”

Notes for Figures 7a through 7e are in Section 8.1.1.

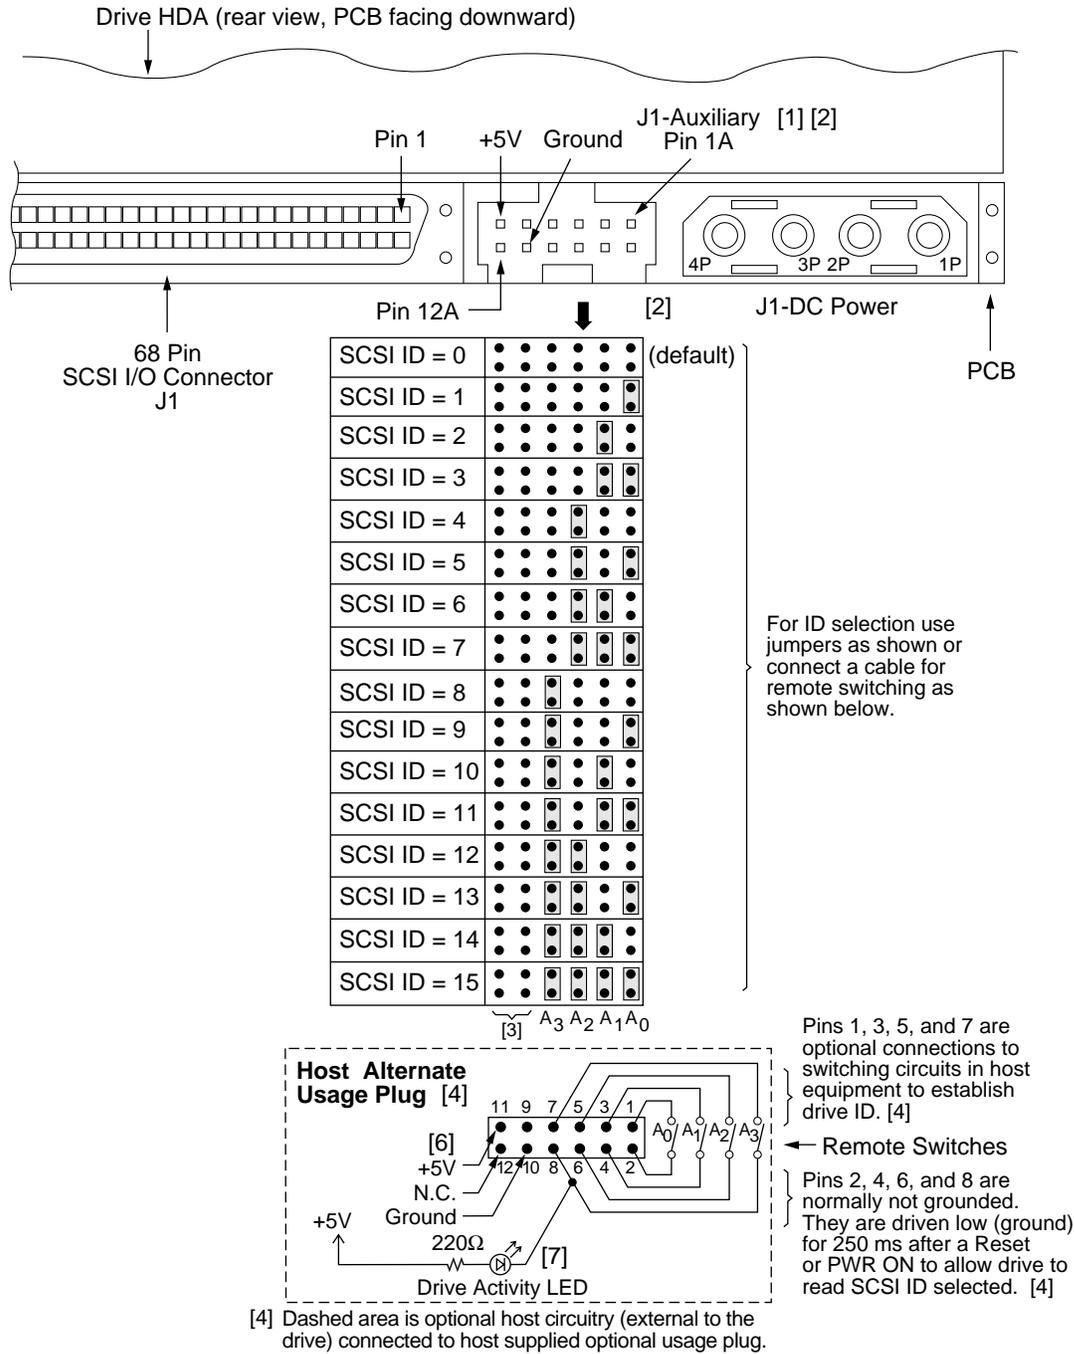


Figure 7c. Barracuda 4LP family drive ID select header J1-auxiliary for models “W” and “WD” (J1-Auxiliary Pins 1A - 12A)

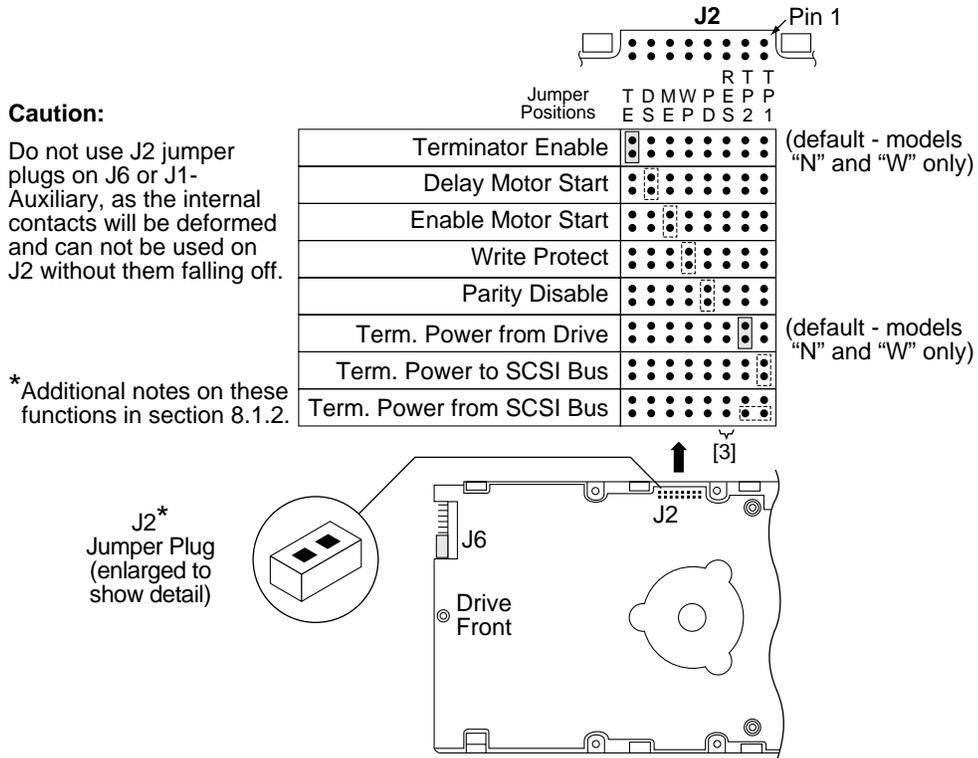


Figure 7d. Barracuda 4LP family drive option select header for models "N," "W," and "WD"

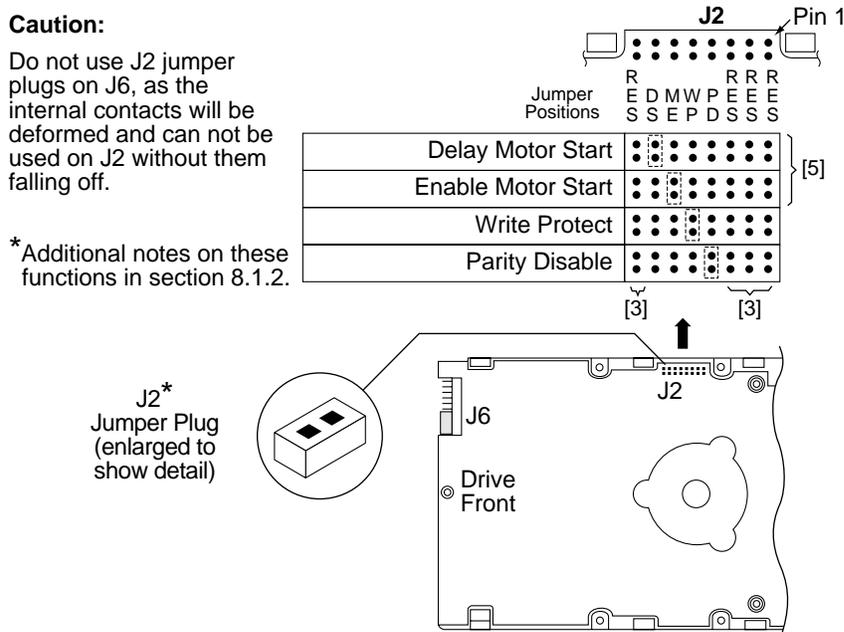


Figure 7e. Barracuda 4LP family drive option select header for models "WC" and "DC"

8.1.1 Notes for Figures 7a, 7b, 7c, 7d, and 7e.

- [1] Notes explaining the functions of the various jumpers on jumper header connectors J2, J1-Auxiliary and J6 are given here and in Section 8.1.2. The term “**default**” means as standard OEM units are configured with a jumper on those positions when shipped from factory. “Off” means no jumper is installed; “On” means a jumper is installed. OFF or ON underlined is factory **default** condition.
- [2] The PCB on “N,” “WC,” and “DC” model drives does not have connector J1-Auxiliary. The J1-Auxiliary connector signals conform to SFF-8009 Revision 2.0, Unitized Connector for Cabled Drives, signal assignments for auxiliary connectors. See note [4].
- [3] Reserved useage. Do not install any jumpers.
- [4] Table 4 summarizes the configuration selection possibilities available on the different Barracuda 4LP model drives.
- [5] These signals are also on 80 pin J1. See Table 13d and 13e.
- [6] Voltage supplied by the drive.
- [7] J1A Drive Activity LED—with series resistor built-in pin 12, is the open collector driver that drives the external LED minus side low to turn it on. This output is capable of driving >20mA. This is the same signal as on J6 pin 12, except J1A pin 8 goes through a 220 Ohm resistor. Tie the minus side of the external LED to this pin.
- [8] J6 Drive Activity LED—without series resistor built-in pin 8, is the open collector driver that drives the external LED minus side low to turn it on. This output is capable of driving >20mA. This is the same signal as on J1A pin 8, except J6 pin 12 does not go through a 220 Ohm resistor. Tie the minus side of the external LED to this pin.

Table 4: Drive configuration selections summary

Interface Type	Function	Connector				Applicable Figure
		J1	J6	J1-AUX	J2	
N	Drive ID		X, Y	none		7a
N	Drive Activity LED		Y [c]	none		7a
N	Option select			none	X	7d
W, WD	Drive ID		X, Y	X, Y [e]		7b, 7c [a]
W, WD	Drive Activity LED		Y [c]	Y [c]		7b, 7c [a]
W, WD	Option select				X	7d
WC, DC	Drive ID	Y[f]	X, Y	none		7b [d]
WC, DC	Drive Activity LED	Y[b][c]	Y [c]	none		7b [d]
WC, DC	Option select:					
	Delayed Mtr Start	Y[b]		none	X	7e
	Enable Mtr Start	Y[b]		none	X	7e
	Write Protect			none	X	7e
	Parity Disable			none	X	7e

("X" means the function selection can be made with jumpers on that connector;
 "Y" means the signal is available to host through that connector.)

Notes for Table 4 []:

- [a] Use either J6 or J1-Aux, but not both.
- [b] I/O connector J1 plugs directly into host. No jumper can be installed on J1. The host supplies the logic state of these function signals causing the selection of these functions. See pinout Table 13d and 13e.
- [c] The host can drive a remotely located Drive Activity LED using signal.
- [d] Use either J1 or J6, but not both.
- [e] The drive reads the ID (asserted low) from J1-Auxiliary pins 1, 3, 5 and 7 for 250 ms after power-on or drive reset. Jumper plugs can be used on J1-Auxiliary pins 1-2, 3-4, 5-6 and 7-8 to set drive ID if desired, but usually a connector/cable is plugged to J1-Auxiliary to run these signals to the host for remote ID selection.
- [f] The host selects drive ID through J1.

8.1.2 Function description

J2

Jumper

Installation

Jumper Function Description

TE

(Applies only to “N” and “W” models)

On

With the jumper installed, the On-board (non-removable) terminator circuits are enabled (connected to the I/O lines). **Default** is jumper installed.

Off

Terminator circuits not enabled (not connected to I/O lines).

DS ME

(Applies to all models)

Off

Off

Spindle starts immediately after power up - **Default** setting.

Off

On

Drive spindle does not start until Start Unit command received from host.

On

Off

Spindle Startup is delayed by SCSI ID times 12 seconds after power is applied, i.e., drive 0 spindle starts immediately when DC power connected, drive 1 starts after 12 second delay, drive 2 starts after 24 second delay, etc.

On

On

Drive spindle starts when Start Unit command received from host. Delayed start feature is overridden and does not apply when **ME** jumper is installed.

WP

(Applies to all models)

On

Entire drive is write protected.

Off

Drive is not write protected. **Default** is no **WP** jumper installed.

PD

(Applies to all models)

On

Parity checking and parity error reporting by the drive is disabled.

Off

Drive checks for parity and reports result of parity checking to host.

Default is **PD** jumper not installed.

RES

(Applies to all models)

Off

Reserved jumper position. Default is no jumper installed.

TP2 TP1

(Does not apply to “WC” or “DC” models)

Off

Off

No terminator power is connected to drive terminators or SCSI bus I/O cable*.

On

Off

Drive supplies its own terminator power only. Jumper on this position is factory **default**.

Off

On

Drive supplies power to SCSI bus I/O cable*; none to internal terminators. When drives have differential I/O circuits, a jumper on the **TP1** position may be needed to power external terminators (see system documentation). The “WD” drives have differential I/O circuits which have no terminator circuits on the drive.

On

On

Drive supplies terminator power to itself (internal connection) and to SCSI bus I/O cable*. This is a legal jumper setting.

TP1 and TP2

“Position A”

(Applies only to “N” and “W”)

On

This horizontally positioned jumper across the two **TP** positions furthest from the PCB edge, connects terminator power from SCSI bus I/O Termpower cable* to the drive’s internal terminators (for single-ended I/O only).

Off

See above explanations for **TP** jumpers.

*See Figure 7d for pins used for Termpower.

8.2 Drive orientation

The balanced rotary arm actuator design of the drive allows it to be mounted in any orientation. All drive performance characterization, however, has been done with the drive in horizontal (discs level) and vertical (drive on its side) orientations, and these are the two preferred mounting orientations.

8.3 Cooling


Cabinet cooling must be designed by the customer so that the ambient temperature immediately surrounding the drive will not exceed temperature conditions specified in Section 6.4.1, "Temperature." Specific consideration should be given to make sure adequate air circulation is present around the printed circuit board (PCB) to meet the requirements of Section 6.4.1, "Temperature."

8.3.1 Air flow


The rack, cabinet, or drawer environment for the Barracuda 4LP drive must provide heat removal from the electronics and head and disc assembly (HDA). You should confirm that adequate heat removal is provided using the temperature measurement guidelines described in Section 6.4.1.

Forced air flow may be required to keep temperatures at or below the specified case temperatures of Table 3, Column 2, in which case the drive should be oriented, or air flow directed, so that the least amount of air flow resistance is created while providing air flow to the electronics and HDA. Also, the shortest possible path between the air inlet and exit should be chosen to minimize the travel length of air heated by the drive and other heat sources within the rack, cabinet, or drawer environment.

If forced air is determined to be necessary, possible air-flow patterns are shown in Figure 8. The air-flow patterns are created by one or more fans, either forcing or drawing air as shown in the illustrations. Conduction, convection, or other forced air-flow patterns are acceptable as long as the temperature measurement guidelines of Section 6.4.1 are met.

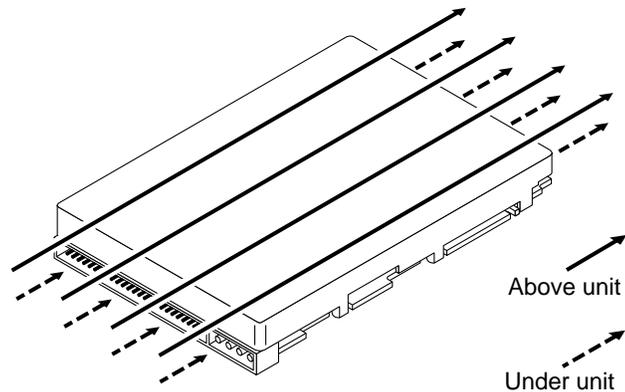

Note. Air flows in the direction shown (front to back) or in reverse direction (back to front)

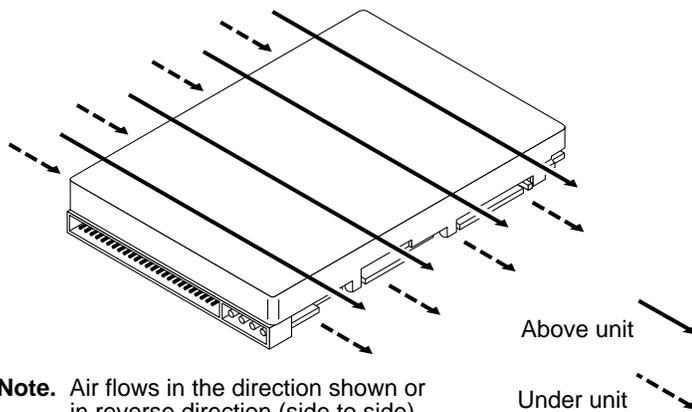

Note. Air flows in the direction shown or in reverse direction (side to side)

Figure 8. Air flow (suggested)

8.4 Drive mounting

When mounting the drive using the bottom holes (x-y plane in Figure 5) care must be taken to ensure that the drive is not physically distorted due to a stiff non-flat mounting surface. The allowable mounting surface stiffness is 80 lb/in (14.0 N/mm). The following equation and paragraph define the allowable mounting surface stiffness:

$$K = \frac{F}{x} = 80\text{lb/in (14.0 N/mm)}$$

where 'k' represents the mounting surface stiffness (units of lb/in or N/mm), and 'x' represents the out-of-plane mounting surface distortion (units of inches or millimeters). The out-of-plane distortion ('x') is determined by defining a plane with three of the four mounting points fixed and evaluating the out-of-plane deflection of the fourth mounting point when a known force is applied to the fourth point.

Note. Before mounting the drive in any kind of 3.5-inch to 5.25-inch adapter frame, verify with Seagate Technology that the drive can meet the shock and vibration specifications given herein while mounted in such an adapter frame. Adapter frames that are available may not have a mechanical structure capable of mounting the drive so that it can meet the shock and vibration specifications listed in this manual.

8.5 Grounding

Signal ground (PCB) and HDA ground are connected together in the drive and cannot be separated by the user. The equipment in which the drive is mounted is connected directly to the HDA and PCB with no electrically isolating shock mounts. If it is desired for the system chassis to not be connected to the HDA/PCB ground, the systems integrator or user must provide a nonconductive (electrically isolating) method of mounting the drive in the host equipment.

Increased radiated emissions may result if you do not provide the maximum surface area ground connection between system ground and drive ground. This is the system designer's and integrator's responsibility.

9.0 Interface requirements

This section describes Barracuda 4LP interface requirements.

9.1 General description

This section partially describes the interface requirements as implemented on the drives. The major portion of the interface requirements/implementation is described in the Seagate SCSI Interface Product Manual, P/N 77738479. This section has tables that give the Barracuda 4LP Family drive's version of the SCSI implementation described in the SCSI Interface Product Manual.

9.2 SCSI interface messages supported

Table 5 lists the messages supported by the SCSI-2 and SCSI-3 modes of the Barracuda 4LP Family drives.

Table 5: SCSI messages supported by Barracuda 4LP family drives

Message Name	Message Code	Supported by SCSI-2/3
Abort	06h	Y
Abort-tag	0Dh	Y
Bus device reset	0Ch	Y
Clear queue	0Eh	Y
Command complete	00h	Y
Continue I/O process	12h	Y
Disconnect	04h	Y
Extended messages	01h[1]	Y
Identify	80h-FFh	Y
Ignore wide residue (two bytes)	23h	Y
Initiate recovery	0Fh	N
Initiator detected error	05h	Y
Linked command complete	0Ah	Y
Linked command complete with flag	0Bh	Y
Message parity error	09h	Y
Message reject	07h	Y
Modify data pointer	[1]	N
No operation	08h	Y
Queue tag messages (two bytes)		
Head of queue tag	21h	Y
Ordered queue tag	22h	Y
Simple queue tag	20h	Y
Release recovery	10h	N
Restore pointers	03h	Y
Save data pointer	02h	Y
Synchronous data transfer req.	[1]	Y
Target transfer disable	13h	Y
Terminate I/O process	11h	N
Wide data transfer request	[1] [2]	Y

Notes.

[1] Extended messages (see P/N 77738479 SCSI Interface Product Manual).

[2] Not applicable to "N" models.

9.3 SCSI interface commands supported

Table 6 following lists the SCSI interface commands that are supported in the SCSI-2, and SCSI-3 modes of the drive. Barracuda 4LP Family drives can be changed back and forth between SCSI-1 and SCSI-2/SCSI-3 modes using the Change Definition Command. OEM standard drives are shipped set to operate in SCSI-2/SCSI-3 mode.

Table 6: Commands supported by Barracuda 4LP family drive

Command Name	Command Code	Supported by SCSI-2/3
Change definition	40h	Y
Compare	39h	N
Copy	18h	N
Copy and verify	3Ah	N
Format unit [1]	04h	Y
Block Format		N
Bytes from index		Y
Physical sector format		Y
DPRY bit supported		N
DCRT bit supported		Y
STPF bit supported		Y
IP bit supported		Y
DSP bit supported		Y
IMMED bit supported		Y
VS (vendor specific)		N
Inquiry	12h	Y
Date code page (C1h)		Y
Device Behavior page (C3h)		Y
Firmware numbers page (C0h)		Y
Implemented operating def page (81h)		Y
Jumper settings page (C2h)		Y
Supported Vital product data page (00h)		Y
Unit serial number page (80h)		Y
Lock-unlock cache	36h	N
Log select	4Ch	Y
DU bit		N
DS bit		Y
TSD bit		Y
ETC bit		N
TMC bit		N
LP bit		N
Log sense	4Dh	Y
Cache statistics page (37h)		Y
Non-medium error page (06h)		Y
Pages supported list (00h)		Y
Power-on time page (3Eh)		Y
Read error counter page (03h)		Y
Verify error counter page (05h)		Y
Write error counter page (02h)		Y
Mode select (same pages as Mode Sense command)	15h	Y [2]
Mode select (10)	55h	Y
Capacity Programming		Y

Table 6: Commands supported by Barracuda 4LP family drive (Continued)

Command Name	Command Code	Supported by SCSI-2/3
Mode sense	1Ah	Y [2]
Caching parameters page (08h)		Y
Control mode page (0Ah)		Y
Disconnect/reconnect (02h) (DTDC, DIMM not used)		Y
Error recovery page (01h)		Y
Format page (03h)		Y
Information exceptions control page (1Ch)		Y
Notch and Partition Page (0Ch)		N
Power condition page (1Ah)		Y
Rigid disc drive geometry page (04h)		Y
Unit attention page (00h)		Y
Verify error recovery page (07h)		Y
Xor Control page (10h)		N
Mode sense (10)	5Ah	Y
Prefetch	34h	N
Read	08h	Y
Read buffer (modes 0, 2, 3 supported)	3Ch	Y
Read capacity	25h	Y
Read defect data	37h	Y
Read extended	28h	Y
DPO bit supported		Y
FUA bit supported		Y
Read long	3Eh	Y
Reassign blocks	07h	Y
Rebuild	81h	N
Receive diagnostic results	1Ch	Y
Supported diagnostics pages (00h)		Y
Translate page (40h)		Y
Regenerate	82h	N
Release	17h	Y
Release (10)	57h	Y
Request sense	03h	Y
Actual retry count bytes		Y
Deferred error supported		Y
Extended sense		Y
Field pointer bytes		Y
Reserve	16h	Y
3rd party reserve		Y
Extent reservation		N
Reserve (10)	56h	Y
3rd part reserve		Y
Extent reservation		N
Rezero unit	01h	Y
Search data equal	31h	N
Search data high	30h	N
Search data low	32h	N
Seek	0Bh	Y

Table 6: Commands supported by Barracuda 4LP family drive (Continued)

Command Name	Command Code	Supported by SCSI-2/3
Seek extended	2Bh	Y
Send diagnostics	1Dh	Y
Supported diagnostics pages (00h)		Y
Translate page (40h)		Y
Set limits	33h	N
Start unit/stop unit (spindle ceases rotating) (1CH)	1Bh	Y
Synchronize cache	35h	Y
Test unit ready	00h	Y
Verify	2Fh	Y
DPO bit supported		Y
BYTCHK bit supported		Y
Write	0Ah	Y
Write and verify	2Eh	Y
DPO bit supported		Y
BYTCHK bit supported		Y
Write buffer (modes 0, 2, supported)	3Bh	Y
Firmware download option (modes 5, 7 supported) [3]		Y
Write extended	2Ah	Y
DPO bit supported		Y
FUA bit support		Y
Write long	3Fh	Y
Write same	41h	Y
XDRead	52h	N
XDWrite	50h	N
XDWrite extended	80h	N
XPWrite	51h	N

[1] The drive can format to any even number of bytes per sector from 180 to 4,096

[2] Tables 8a and 8b show how individual bits are set and which are changeable by the host.

[3] **WARNING:** A power loss during flash programming can result in firmware corruption. This usually makes the drive inoperable.

Table 7 lists the Standard Inquiry command data that the drive should return to the initiator per the format given in the SCSI-2 Interface Product Manual P/N 77738479, section 5.1.1.3.

Table 7: Barracuda 4LP family drive Standard Inquiry data

Bytes	Data (HEX)																
0-15	00	00	[02] ¹	[02] ²	8F	00	[00] ⁶	[1E] ³	53	45	41	47	41	54	45	20	VENDOR ID
16-31	53	54	[33]	[34]	[33]	[37]	[31]	[4E] ⁴	20	20	20	20	20	20	20	20	PRODUCT ID
32-47	R#	R#	R#	R#	S#	S#	S#	S#	S#	S#	S#	S#	00	00	00	00	
48-63	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
64-79	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
80-95	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
96-111	00	43	6F	70	79	72	69	67	68	74	20	28	63	29	20	[31]	COPYRIGHT
112-127	[39]	[39]	[37] ⁵	20	53	65	61	67	61	74	65	20	41	6C	6C	20	NOTICE
128-143	72	69	67	68	74	73	20	72	65	73	65	72	76	65	64	20	

- []¹ 01 means SCSI-1 implemented;
02 means SCSI-2/SCSI-3 implemented. Default is 02.
- []² The drive can be changed between these two configurations:
01 means response data in SCSI-1 format and has compatibility with Common Command Set data.
02 means response data in SCSI-2/SCSI-3 format (default is 02).
- []³ For "N" models this value is 1E.
For "W," "WD," "WC," and "DC" models this value is 3E.
- R# Four ASCII digits representing the last four digits of the product Firmware Release number. This information is also given in the Vital Product Data page C0h, together with servo RAM and ROM release numbers.
- S# Eight ASCII digits representing the eight digits of the product serial number.
- []⁴ Bytes 18 through 23 reflect model of drive. Shown here are hex values for Model ST34371N. Values for ST32171N are 33 32 31 37 31 4E.
For models "W," "WD," "WC," and "DC," byte 23 is 57 (W), since these are wide data bus drives and that is the only fact the host needs to discover from byte 23.
- []⁵ Copyright Year - changes with actual year.
- []⁶ For "N" models, this value is 00.
For models "W," "WD," "WC," and "DC," this value is 01.

9.3.1 Inquiry Vital Product data

Instead of the standard Inquiry data shown in Table 7, the initiator can request several Vital Product Data pages by setting the Inquiry command EVPD bit to one. The SCSI, Version 2 Interface Product Manual P/N 77738479, section 5.1.1.3.1 lists the Vital Product Data pages and describes their formats. A separate Inquiry command must be sent to the drive for each Vital Product Data page the initiator wants the drive to send back.

9.3.2 Mode Sense data

The Mode Sense command provides a means for the drive to report its operating parameters to the initiator. The drive maintains four sets of Mode parameters, Default values, Saved values, Current values and Changeable values.

Default values are hard coded in the drive firmware that is stored in flash EPROM nonvolatile memory on the drive PCB. Default values can be changed only by downloading a complete set of new firmware into the flash EPROM. An initiator can request and receive from the drive a list of Default values and use those in a Mode Select command to set up new Current and Saved values, where the values are changeable.

Saved values are stored on the disk media using a Mode Select command. Only parameter values that are allowed to be changed can be changed by this method. See “Changeable values” defined below. Parameters in the Saved values list that are not changeable by the Mode Select command get their values from the Default values storage.

Current values are volatile values currently being used by the drive to control its operation. A Mode Select command can be used to change these values (only those that are changeable). Originally, they are installed from Saved or Default values after a power on reset, hard reset, or Bus Device Reset message.

Changeable values form a bit mask, stored in nonvolatile memory, that dictates which of the Current values and Saved values can be changed by a Mode Select command. A “one” allows a change to a corresponding bit; a “zero” allows no change. For example, in Table 8a refer to Mode page 01, in the row entitled “CHG”. These are hex numbers representing the changeable values for Mode page 01. Note that bytes 04, 05, 06, and 07 are not changeable, because those fields are all zeros. If some changeable code had a hex value EF, that equates to the binary pattern 1110 1111. If there is a zero in any bit position in the field, it means that bit is not changeable. Bits 7, 6, 5, 3, 2, 1, and 0 are changeable, because those bits are all ones. Bit 4 is not changeable.

Though the drive always reports non-zero values in bytes 00 and 01, those particular bytes are never changeable.

The Changeable values list can only be changed by downloading new firmware into the flash EPROM.

On standard OEM drives the Saved values are taken from the Default values list and stored into the Saved values storage location on the media prior to shipping.

When a drive is powered up, it takes Saved values from the media and stores them to the Current values storage in volatile memory. It is not possible to change the Current values (or the saved values) with a Mode Select command before the drive is up to speed and is “ready.” An attempt to do so results in a “Check Condition” status being returned.

Note. Because there may be several different versions of drive control firmware in the total population of drives in the field, the Mode Sense values given in the following tables may not exactly match those of some drives.

The following tables list the values of the data bytes returned by the drive in response to the Mode Sense command pages for SCSI-2/SCSI-3 implementation (see SCSI Interface Product Manual, P/N 77738479).

Definitions: SAV = Saved value
 DEF = Default value. Standard drives are shipped configured this way.
 CHG = Changeable bits; indicates if current and saved values are changeable.

Table 8a: Mode sense data, ST34371 default values (SCSI-2/3 implementation)

Bytes	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mode Sense Data	87	00	10	08																				
Mode Page	<-----Mode Page Headers and Parameter Data Bytes----->																							
01 SAV	81	0A	C8	28	44	40	00	00	22	00	FF	FF												
01 DEF	81	0A	C8	28	44	40	00	00	22	00	FF	FF												
01 CHG	81	0A	EF	FF	00	00	00	00	FF	00	00	00												
02 SAV	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00									
02 DEF	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00									
02 CHG	82	0E	FF	FF	00	00	00	00	00	00	00	00	87	00	00									
03 SAV	83	16	00	50	00	50	00	00	00	00	A5	02	00	00	01	00	3C	00	5A	40	00	00	00	00
03 DEF	83	16	00	50	00	50	00	00	00	00	A5	02	00	00	01	00	3C	00	5A	40	00	00	00	00
03 CHG	83	16	00	00	FF	FF	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
04 SAV	84	16	00	14	30	0A	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 DEF	84	16	00	14	30	0A	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 CHG	84	16	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
07 SAV	87	0A	00	44	40	00	00	00	00	00	FF	FF												
07 DEF	87	0A	00	44	40	00	00	00	00	00	FF	FF												
07 CHG	87	0A	0F	FF	00	00	00	00	00	00	00	00												
08 SAV	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 DEF	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 CHG	88	12	85	00	FF	FF	FF	FF	FF	FF	00	00	A0[1]	FF	00	00	00	00	00	00				
0A SAV	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A DEF	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A CHG	8A	0A	03	F3	00	00	00	00	00	00	00	00												
1A SAV	9A	0A	02	00	00	00	00	00	00	00	00	00												
1A DEF	9A	0A	02	00	00	00	00	00	00	00	00	00												
1A CHG	9A	0A	02	00	00	00	00	00	00	00	00	00												
1C SAV	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C DEF	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C CHG	9C	0A	0C	00	00	00	00	00	00	00	00	00												
00 SAV	80	02	00	00																				
00 DEF	80	02	00	00																				
00 CHG	80	02	77	00																				

[1] Though byte 12, bit 7 (A0) is shown as changeable, the FSW function governed by that bit is not implemented by this drive.

Table 8b: Mode sense data, ST32171 default values (SCSI-2/3 implementation)

Bytes	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mode Sense Data	87	00	10	08																				
Mode Page	<-----Mode Page Headers and Parameter Data Bytes----->																							
01 SAV	81	0A	C8	28	44	40	00	00	22	00	FF	FF												
01 DEF	81	0A	C8	28	44	40	00	00	22	00	FF	FF												
01 CHG	81	0A	EF	FF	00	00	00	00	FF	00	00	00												
02 SAV	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00	00								
02 DEF	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00	00								
02 CHG	82	0E	FF	FF	00	00	00	00	00	00	00	00	87	00	00	00								
03 SAV	83	16	00	28	00	50	00	00	00	00	00	A5	02	00	00	01	00	3C	00	5A	40	00	00	00
03 DEF	83	16	00	28	00	50	00	00	00	00	00	A5	02	00	00	01	00	3C	00	5A	40	00	00	00
03 CHG	83	16	00	00	FF	FF	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
04 SAV	84	16	00	14	30	05	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 DEF	84	16	00	14	30	05	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 CHG	84	16	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
07 SAV	87	0A	00	40	44	00	00	00	00	00	FF	FF												
07 DEF	87	0A	00	40	44	00	00	00	00	00	FF	FF												
07 CHG	87	0A	0F	FF	00	00	00	00	00	00	00	00												
08 SAV	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 DEF	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 CHG	88	12	B5	00	FF	FF	FF	FF	FF	FF	00	00	A0[1]	FF	00	00	00	00	00	00				
0A SAV	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A DEF	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A CHG	8A	0A	03	F3	00	00	00	00	00	00	00	00												
1A SAV	9A	0A	02	00	00	00	00	00	00	00	00	00												
1A DEF	9A	0A	02	00	00	00	00	00	00	00	00	00												
1A CHG	9A	0A	02	00	00	00	00	00	00	00	00	00												
1C SAV	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C DEF	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C CHG	9C	0A	0C	00	00	00	00	00	00	00	00	00												
00 SAV	80	02	00	00																				
00 DEF	80	02	00	00																				
00 CHG	80	02	77	00																				

[1] Though byte 12, bit 7 (A0) is shown as changeable, the FSW function governed by that bit is not implemented by this drive.

Table 9a: Mode sense data, ST34571 default values (SCSI-2/3 implementation)

Bytes	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mode Sense Data	87	00	10	08																				
Mode Page	<-----Mode Page Headers and Parameter Data Bytes----->																							
01 SAV	81	0A	C8	44	40	00	00	00	22	00	FF	FF												
01 DEF	81	0A	C8	44	40	00	00	00	22	00	FF	FF												
01 CHG	81	0A	EF	FF	00	00	00	00	FF	00	00	00												
02 SAV	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00									
02 DEF	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00									
02 CHG	82	0E	FF	FF	00	00	00	00	00	00	00	00	87	00	00	00								
03 SAV	83	16	00	50	00	50	00	00	00	00	00	AC	02	00	00	01	00	3C	00	5A	40	00	00	00
03 DEF	83	16	00	50	00	50	00	00	00	00	00	AC	02	00	00	01	00	3C	00	5A	40	00	00	00
03 CHG	83	16	FF	FF	FF	FF	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
04 SAV	84	16	00	14	30	0A	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 DEF	84	16	00	14	30	0A	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 CHG	84	16	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
07 SAV	87	0A	00	44	40	00	00	00	00	00	FF	FF												
07 DEF	87	0A	00	44	40	00	00	00	00	00	FF	FF												
07 CHG	87	0A	0F	FF	00	00	00	00	00	00	00	00												
08 SAV	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 DEF	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 CHG	88	12	85	00	FF	FF	FF	FF	FF	FF	00	00	A0[1]	FF	00	00	00	00	00	00				
0A SAV	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A DEF	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A CHG	8A	0A	03	F3	00	00	00	00	00	00	00	00												
1A SAV	9A	0A	00	02	00	00	00	01	00	00	00	04												
1A DEF	9A	0A	00	02	00	00	00	01	00	00	00	04												
1A CHG	9A	0A	02	00	00	00	00	00	00	00	00	00												
1C SAV	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C DEF	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C CHG	9C	0A	0C	00	00	00	00	00	00	00	00	00												
00 SAV	80	02	00	00																				
00 DEF	80	02	00	00																				
00 CHG	80	02	77	00																				

[1] Though byte 12, bit 7 (A0) is shown as changeable, the FSW function governed by that bit is not implemented by this drive.

Table 9b: Mode sense data, ST32271 default values (SCSI-2/3 implementation)

Bytes	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mode Sense Data	87	00	10	08																				
Mode Page	<-----Mode Page Headers and Parameter Data Bytes----->																							
01 SAV	81	0A	C8	44	40	00	00	00	22	00	FF	FF												
01 DEF	81	0A	C8	44	40	00	00	00	22	00	FF	FF												
01 CHG	81	0A	EF	FF	00	00	00	00	FF	00	00	00												
02 SAV	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00	00								
02 DEF	82	0E	80	80	00	0A	00	00	00	00	00	00	00	00	00	00								
02 CHG	82	0E	FF	FF	00	00	00	00	00	00	00	00	87	00	00	00								
03 SAV	83	16	00	28	00	50	00	00	00	00	00	AC	02	00	00	01	00	3C	00	5A	40	00	00	00
03 DEF	83	16	00	28	00	50	00	00	00	00	00	AC	02	00	00	01	00	3C	00	5A	40	00	00	00
03 CHG	83	16	00	00	FF	FF	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
04 SAV	84	16	00	14	30	05	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 DEF	84	16	00	14	30	05	00	00	00	00	00	00	00	00	00	00	00	00	00	00	1C	3C	00	00
04 CHG	84	16	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
07 SAV	87	0A	00	40	40	00	00	00	00	00	FF	FF												
07 DEF	87	0A	00	40	40	00	00	00	00	00	FF	FF												
07 CHG	87	0A	0F	FF	00	00	00	00	00	00	00	00												
08 SAV	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 DEF	88	12	14	00	FF	FF	00	00	FF	FF	FF	FF	80	03	00	00	00	00	00	00				
08 CHG	88	12	B5	00	FF	FF	FF	FF	FF	FF	00	00	A0[1]	FF	00	00	00	00	00	00				
0A SAV	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A DEF	8A	0A	02	00	00	00	00	00	00	00	00	00												
0A CHG	8A	0A	03	F3	00	00	00	00	00	00	00	00												
1A SAV	9A	0A	00	02	00	00	00	01	00	00	00	04												
1A DEF	9A	0A	00	02	00	00	00	01	00	00	00	04												
1A CHG	9A	0A	02	00	00	00	00	00	00	00	00	00												
1C SAV	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C DEF	9C	0A	00	04	00	00	00	00	00	00	00	01												
1C CHG	9C	0A	00	00	00	00	00	00	00	00	00	00												
00 SAV	80	02	00	00																				
00 DEF	80	02	00	00																				
00 CHG	80	02	77	00																				

[1] Though byte 12, bit 7 (A0) is shown as changeable, the FSW function governed by that bit is not implemented by this drive.

9.4 SCSI bus conditions and miscellaneous features supported

Asynchronous SCSI bus conditions supported by the drive are listed below. These conditions cause the SCSI device to perform certain actions and can alter the SCSI bus phase sequence. Other miscellaneous operating features supported are also listed here. Refer to SCSI I/O Product manual P/N 77738479 for details.

Table 10: SCSI bus conditions and other miscellaneous features

Condition/Feature Supported by:

SCSI-2/SCSI-3	Conditions or Feature
N	Adaptive Caching
Y	Adaptive Read Look-ahead
Y	Arbitrating System
Y	Asynchronous Data Transfer
N	Asynchronous Event Notification
Y	Attention Condition
Y	Capacity Programming
Y	Contingent Allegiance Condition
Y	Deferred Error Handling
Y	Differential Interface Circuits available
Y	Disconnect/Reconnect
Y	Flag and Link bits in Control Byte supported
Y	Format progress indication
Y	Immediate status on Format unit command
Y	Immediate status on Start/Stop command
Y	Immediate status on Synchronize cache
Y	Parameter Rounding
Y	Queue tagging (up to 64 Que tags supported)
Y	Reporting actual retry count in Extended Sense bytes 15, 16 and 17.
Y	Reset Condition
Y	Segmented Caching
N	Synchronized (locked) Spindle Operation
Y	Synchronous Data Transfer
N	Zero Latency Read
SCSI-2/SCSI-3	Status Supported
Y	Good
Y	Check Condition
N	Condition Met/Good
Y	Busy
Y	Intermediate/Good
N	Intermediate/Condition Met/Good
Y	Reservation Conflict
Y	Queue Full

9.5 Synchronous data transfer

9.5.1 Synchronous data transfer periods supported

Table 11 and Section 9.5.2 list Synchronous Data transfer periods supported by the drive. The data transfer period to be used by the drive and the initiator is established by an exchange of messages during the Message Phase of operation. See the section on message protocol in the SCSI Interface Manual P/N 77738479.

Table 11: Synchronous data transfer periods for drive

M (Decimal)	Transfer period (M times 4 nanoseconds)
12 [1]	50 [1]
15 [1]	62.5 [1]
18 [1]	75 [1]
25	100
31	125
37	150
50	200
62	250
75	300
87	350
100	400

[1] FAST-20 SCSI transfer periods

9.5.2 REQ/ACK offset

The maximum value supported by the Barracuda 4LP family drives for REQ/ACK offset is 15 (0Fh).

9.6 Physical interface

Figure 9a shows the locations of the drive physical interface components for the N drives. Shown are the locations of the DC power connector, the SCSI interface connector, the I/O line terminators, and the drive select and option select headers.

Details of the physical, electrical and logical characteristics are given in sections following, while the SCSI operational aspects of Seagate drive interfaces are given in the Seagate SCSI Interface Product Manual, P/N 77738479.

This section describes the connectors, cables, signals, terminators and bus timing of the DC and SCSI I/O interface. See Section 9.8 and Section 9.9 for additional terminator information.

9.6.1 DC cable and connector

With the exception of the “WC” and “DC” drives, the drive receives DC power through a 4 pin connector (see Figure 9a for pin assignment) mounted at the rear of the main PCB. Recommended part numbers of the mating connector are listed below, but equivalent parts may be used.

Type of Cable	Connector	Contacts (20-14 AWG)
14 AWG	MP 1-480424-0	AMP 60619-4 (Loose Piece) AMP 61117-4 (Strip)

Models “WC” and “DC” receive power through the 80 pin I/O connector. See Tables 13d and 13e.

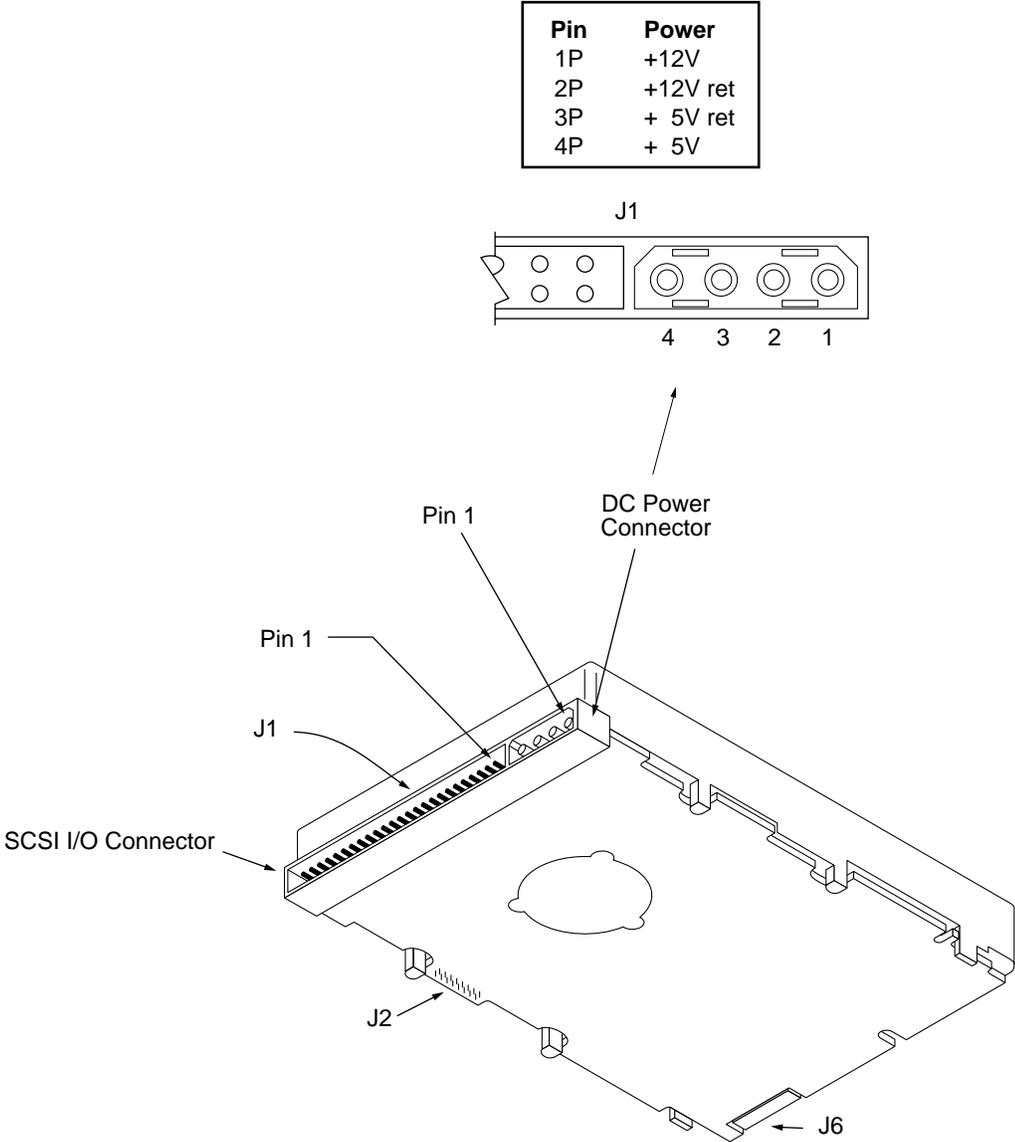


Figure 9a. Physical interface for "N" model drives


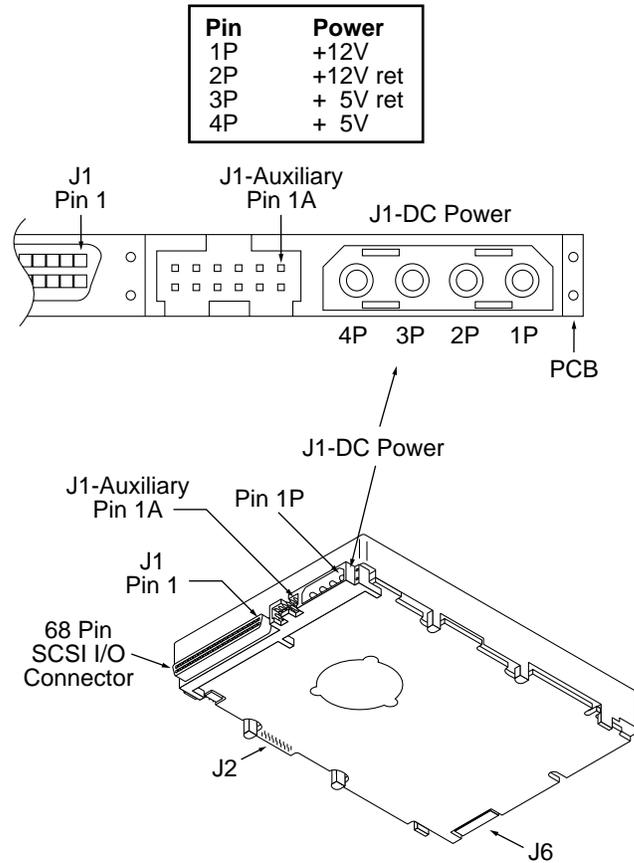


Figure 9b. Model “W” and “WD” drive physical interface (68 pin J1 SCSI I/O connector)

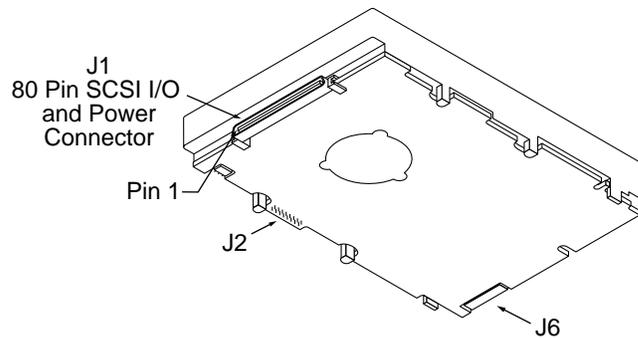

Note: See Table 13d and 13e for DC power pin assignments.

Figure 9c. Model “WC” and “DC” drive physical interface (80 pin J1 SCSI I/O connector and DC power connector)

9.6.2 SCSI Interface physical description

The drives may be daisy chained together or with other compatible SCSI devices. Both ends of the cable must be terminated. The “N,” “W,” and “WC” model drives implement single-ended drivers and receivers. All signals are common between all SCSI devices. The drive may be daisy chained only with SCSI devices having the same type drivers and receivers. Devices having single-ended interface circuits cannot be on the same daisy-chain with devices having differential interface circuit. A maximum of 8 (“N” models) or 16 (“W” and “WC”) SCSI devices (including the Host) may be daisy chained together. However, please note the restrictions described in Section 9.6.3.1 about the number of devices allowed in a daisy chain. The SCSI devices at both ends of the daisy-chain are to be terminated. Intermediate SCSI devices shall not be terminated (see Figure 10). Remove the terminator enable jumper **TE** on J2 select header (“N” and “W” models), or the external terminators (“WD” model), not the terminator power source selector jumper **TP** (Figure 7d).

“WC” and “DC” model drives plug into PCB or bulkhead connectors in the Host. They may be connected in a daisy-chain by the host backplane wiring or PCB circuit runs that have adequate DC current carrying capacity to support the number of drives plugged into the PCB or bulkhead connectors. A single 80 pin I/O connector cable cannot support the DC current needs of several drives, so no daisy chain cables beyond the bulkhead connectors should be used. A single drive connected via a cable to a host 80 pin I/O connector is not recommended.

9.6.3 SCSI Interface Cable requirements

In general, cables having the characteristic impedances given in Section 9.6.3.1 are not available; however, impedances that are somewhat lower are satisfactory. A characteristic impedance as listed in Table 12 is recommended for unshielded flat cable or twisted pair ribbon cable. To minimize discontinuances and signal reflections, cables of different impedances should not be used in the same bus. Implementations may require trade-offs in shielding effectiveness, cable length, the number of loads, transfer rates, and cost to achieve satisfactory system operation. If shielded and unshielded cables are mixed within the same SCSI bus, the effect of impedance mismatch must be carefully considered. Proper impedance matching is especially important in order to maintain adequate margin at FAST SCSI transfer rates.

Models “N” use nonshielded cable connectors. A 50 conductor flat cable or 25 twisted pair cable shall be used. A minimum conductor size of 28 AWG should be used to minimize noise effects.

Suggested nonshielded flat cable part numbers are:

Flat cable - 35M-3365-50 Twisted pair - Spectra Twist in flat 455-248-50

Models “W” and “WD” use nonshielded cable connectors. A 68 conductor flat cable or 34 twisted pair cable shall be used with connectors listed in 9.6.4. A minimum conductor size of 28 AWG should be used to minimize noise effects.

Suggested nonshielded flat cable part numbers are:

Flat cable - 35M-3365-68 Twisted pair - Spectra Twist in flat 455-248-68

For “WC” and “DC” models:

The 80 pin connector option is intended for use on drives that plug directly into a PCB or wall/bracket mounted connector in the host equipment. Installations with connectors on cables are not recommended.

9.6.3.1 Single-ended I/O circuits (“N” and “W” models)

The maximum total cable length allowed with drives having single-ended I/O driver and receiver circuits depends on several factors. Table 12 lists the maximum lengths allowed for different configurations of drive usage. These values are from the ANSI SCSI-3 Fast-20 (also called Ultra SCSI) specification X3T10/1071D. All device I/O lines must have equal to or less than 25 pf capacitance to ground, measured at the beginning of the stub.

Table 12: Cable characteristics for single-ended circuits

I/O transfer rate	Maximum number of devices on line	Maximum cable length allowed	Transmission line impedance	
			REQ/ACK	Other signals
≤10 M transfers/s	8 (reg. SCSI bus)	6 meters (19.7 ft.)	90 ± 6 Ohms	90 ± 10 Ohms
≤10 M transfers/s	16 (wide SCSI bus)	6 meters (19.7 ft.)	90 ± 6 Ohms	90 ± 10 Ohms
≤20 M transfers/s	4 (reg./wide SCSI bus)	3 meters (9.8 ft.)	90 ± 6 Ohms	90 ± 10 Ohms
≤20 M transfers/s	8 (reg./wide SCSI bus)	1.5 meters (4.9 ft.)	90 ± 6 Ohms	90 ± 10 Ohms

A stub length of no more than 0.1 meter (0.33 foot) is allowed off the mainline interconnection with any connected equipment. The stub length is measured from the transceiver to the connection to the mainline SCSI bus.

Single-ended I/O pin assignments are shown in Tables 13a, 13b, and 13d.

9.6.3.2 Differential I/O circuits (“WD” and “DC” models)

The maximum total cable length allowed with drives having differential I/O driver and receiver circuits is 25 meters (82 feet). Twisted-pair cable (either twisted-flat or discrete wire twisted pairs) should be used with differential I/O transceiver circuits. A stub length of no more than 0.2 meter (0.66 foot) is allowed off the mainline interconnection with any connected equipment. The stub length is measured from the transceiver to the connection to the mainline SCSI bus. The spacing of devices on the mainline SCSI bus should be at least three times the stub length to avoid clustering (Refer to Annex C of X3T10/1071D). This restriction easily allows the 16 device IDs that the SCSI 16 bit wide bus can address. These values are from the ANSI SCSI-3 Fast-20 (also called Ultra SCSI) specification X3T10/1071D.

An ideal impedance match with cable terminators implies a cable characteristic impedance of 122 ohms. Differential I/O pin assignments are shown in Tables 13c and 13e.

9.6.4 Mating connectors

Part numbers for the different type connectors that mate with the various Barracuda 4LP I/O connectors are given in the following sections.

9.6.4.1 Mating connectors for “N” models

The nonshielded cable connector shall be a 50 conductor connector consisting of two rows of 25 female contacts with adjacent contacts .100 inch apart.

Recommended mating flat cable connector part numbers are:

Closed end (for cable ends)[1]	3M-3425-7000	W/O Strain Relief, No Center Key
	3M-3425-7050	With Strain Relief, No Center Key
	Dupont-66900-290	With Strain Relief, With Center Key
Open end (In daisy-chain)[1]	3M-3425-6000	W/O Strain Relief, No Center Key
	3M-3425-6050	With Strain Relief, No Center Key
	Dupont-66900-250	With Strain Relief, With Center Key

[1] See Figure 10.

The drive device connector is a nonshielded 50 conductor connector consisting of two rows of 25 male pins with adjacent pins .100 inch apart. The connector is keyed (see Figure 11a).

Mating panel mount connector: 3M-CHE-2050-J01A10-KLE.

9.6.4.2 Mating connectors for “W” and “WD” models

The nonshielded cable connector shall be a 68 conductor connector consisting of two rows of 34 male contacts with adjacent contacts .050 inch (1.27 mm) apart.

Recommended mating flat cable connector part numbers are:

Amp Model 786096-7	Female, 68-pin, panel mount
Amp Model 786090-7	Female, 68-pin, cable mount
Amp Model 749925-5	(.050 inch conductor centers, 28 or 30 AWG wire) Use two, 34 conductor, .050 inch center flat cable with this connector. This type connector can only be used on cable ends. [1]
Amp Model 88-5870-294-5	W/O Strain Relief (.025 inch conductor centers, 30 AWG wire). Use either on cable ends or in cable middle section for daisy-chain installations [1].
Amp Model 1-480420-0	Power connector 4 circuit housing
Berg 69307-012	12-position, 2 x 6, 2 mm receptacle housing

[1] See Figure 10.

The drive device connector is a nonshielded 68 conductor connector consisting of two rows of 34 female pins with adjacent pins .050 inch apart. The connector is keyed by means of its shape (see Figure 11b).

9.6.4.3 Mating connectors for “WC” and “DC” models

The nonshielded connector shall be an 80 conductor connector consisting of two rows of 40 contacts with adjacent contacts .050 inch (1.27 mm) apart. See Figure 11c. I/O connection using a cable is not recommended. The length and size of the host equipment DC power carrying conductors from the DC power source to the host equipment 80 pin disk drive interface connector(s) should be strictly designed according to proper power transmission design concepts. No possibility for the equipment user to attach an 80 pin cable/connector should be allowed, since the length of the DC power carrying conductors could not be controlled and therefore could become too long for safe power transmission to the drive. Daisy-chain 80 conductor cables should especially not be allowed, since the power-carrying conductors on the 80 conductor interface were not intended to support a series of drives.

To insure that both drive connector and host equipment mating connector mate properly, both drive connector and host equipment mating connector must meet the provisions of “SFF-8046 Specification for 80-pin connector for SCSI Disk Drives.”

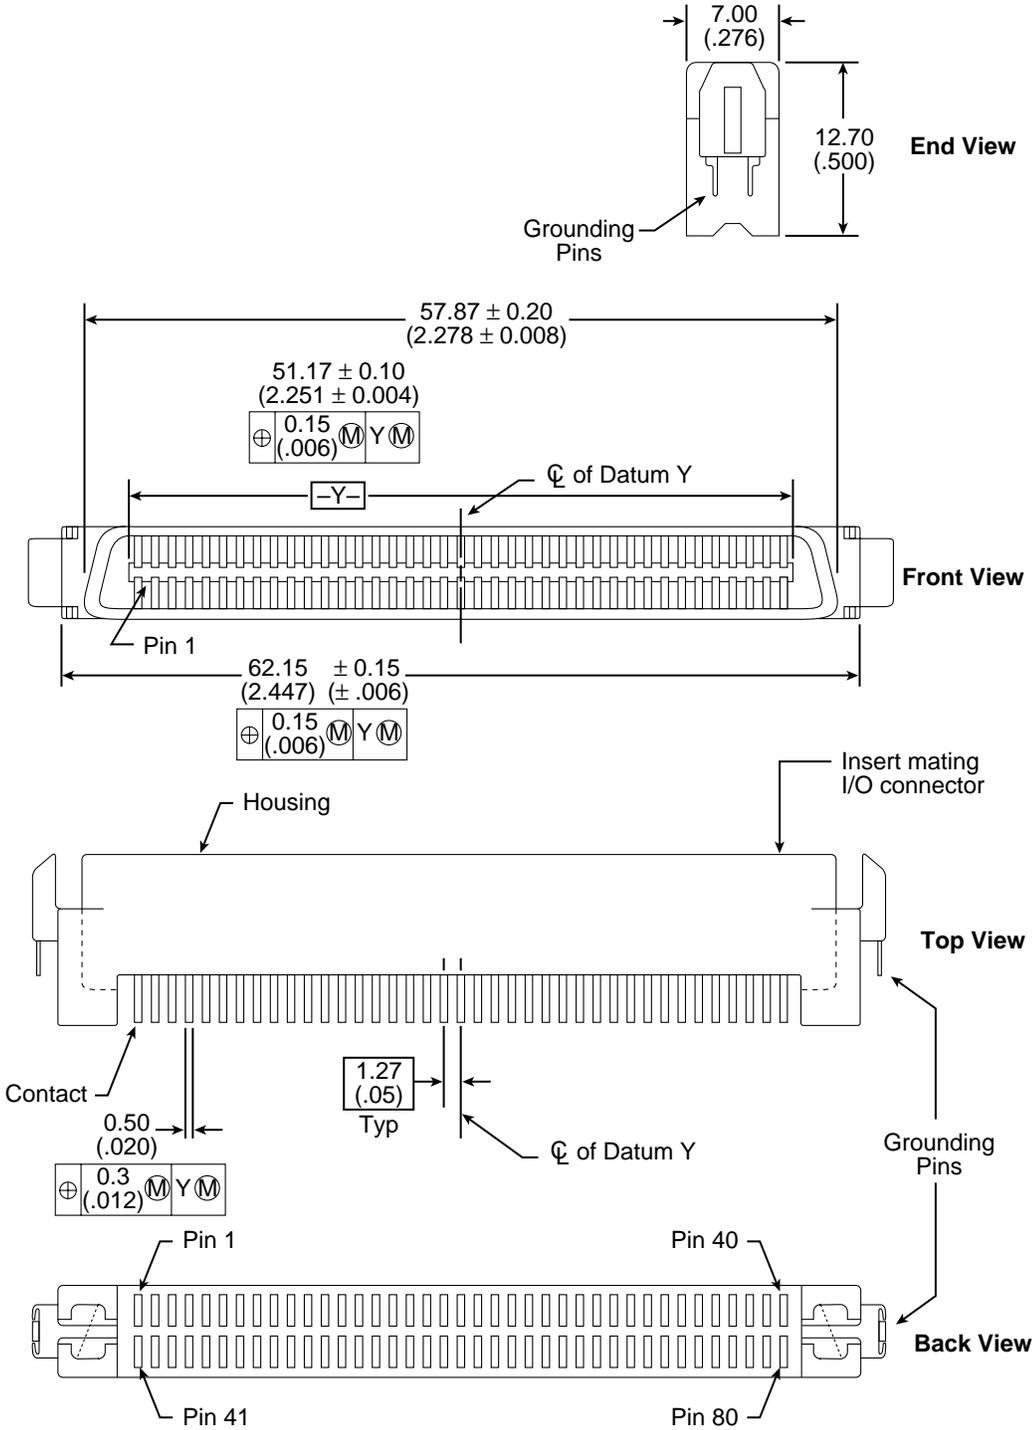


Figure 11c. Nonshielded 80 pin SCSI "SCA-2" connector, used on "WC" and "DC" models

Table 13a: Model "N," single ended I/O, 50 conductor, signal/contact assignments

Signal name [1]	Connector contact number [12]	Cable conductor number [11]		Connector contact number [12]	Signal name [1]
GND	1	1	2	2	-DB0
GND	3	3	4	4	-DB1
GND	5	5	6	6	-DB2
GND	7	7	8	8	-DB3
GND	9	9	10	10	-DB4
GND	11	11	12	12	-DB5
GND	13	13	14	14	-DB6
GND	15	15	16	16	-DB7
GND	17	17	18	18	-DBP
GND	19	19	20	20	GND
GND	21	21	22	22	GND
GND	23	23	24	24	GND
NC [10]	25*	25	26	26	TERMPWR
GND	27	27	28	28	GND
GND	29	29	30	30	GND
GND	31	31	32	32	-ATN
GND	33	33	34	34	GND
GND	35	35	36	36	-BSY
GND	37	37	38	38	-ACK
GND	39	39	40	40	-RST
GND	41	41	42	42	-MSG
GND	43	43	44	44	-SEL
GND	45	45	46	46	-C/D
GND	47	47	48	48	-REQ
GND	49	49	50	50	-I/O

***CAUTION:** Connector contact 25 must not be connected to ground at the host end or the drive end of the cable. If the I/O cable should accidentally be plugged in upside down, terminator power on pin 26 will be shorted to ground.

Notes []: See page following Table 13e.

Table 13b: "W" models single ended I/O cable 68 conductor signal/contact assignments

Signal Name [1]	Connector Contact Number [3]	Cable Conductor Number [2]		Connector Contact Number [3]	Signal Name [1]
GND	1	1	2	35	-DB12
GND	2	3	4	36	-DB13
GND	3	5	6	37	-DB14
GND	4	7	8	38	-DB15
GND	5	9	10	39	-DBP1
GND	6	11	12	40	-DB0
GND	7	13	14	41	-DB1
GND	8	15	16	42	-DB2
GND	9	17	18	43	-DB3
GND	10	19	20	44	-DB4
GND	11	21	22	45	-DB5
GND	12	23	24	46	-DB6
GND	13	25	26	47	-DB7
GND	14	27	28	48	-DBP
GND	15	29	30	49	GND
GND	16	31	32	50	GND
TermPwr	17	33	34	51	TermPwr
TermPwr	18	35	36	52	TermPwr
Reserved	19	37	38	53	Reserved
GND	20	39	40	54	GND
GND	21	41	42	55	-ATN
GND	22	43	44	56	GND
GND	23	45	46	57	-BSY
GND	24	47	48	58	-ACK
GND	25	49	50	59	-RST
GND	26	51	52	60	-MSG
GND	27	53	54	61	-SEL
GND	28	55	56	62	-C/D
GND	29	57	58	63	-REQ
GND	30	59	60	64	-I/O
GND	31	61	62	65	-DB8
GND	32	63	64	66	-DB9
GND	33	65	66	67	-DB10
GND	34	67	68	68	-DB11

Notes []: See page following Table 13e.

Table 13c: “WD” models differential cable 68 conductor signal/pin assignments (Nonshielded connector)[13]

Note. The minus sign next to the signal indicates asserted state is the low voltage of the two levels used for logic signals.

Signal Name [1]	Connector Contact Number [3]	Cable Conductor Number [2]		Connector Contact Number [3]	Signal Name [1]
+DB12	1	1	2	35	-DB12
+DB13	2	3	4	36	-DB13
+DB14	3	5	6	37	-DB14
+DB15	4	7	8	38	-DB15
+DBP1	5	9	10	39	-DBP1
GND	6	11	12	40	GND
+DB0	7	13	14	41	-DB0
+DB1	8	15	16	42	-DB1
+DB2	9	17	18	43	-DB2
+DB3	10	19	20	44	-DB3
+DB4	11	21	22	45	-DB4
+DB5	12	23	24	46	-DB5
+DB6	13	25	26	47	-DB6
+DB7	14	27	28	48	-DB7
+DBP	15	29	30	49	-DBP
DIFFSENS	16	31	32	50	GND
TermPwr	17	33	34	51	TermPwr
TermPwr	18	35	36	52	TermPwr
Reserved	19	37	38	53	Reserved
+ATN	20	39	40	54	-ATN
GND	21	41	42	55	GND
+BSY	22	43	44	56	-BSY
+ACK	23	45	46	57	-ACK
+RST	24	47	48	58	-RST
+MSG	25	49	50	59	-MSG
+SEL	26	51	52	60	-SEL
+C/D	27	53	54	61	-C/D
+REQ	28	55	56	62	-REQ
+I/O	29	57	58	63	-I/O
GND	30	59	60	64	GND
+DB8	31	61	62	65	-DB8
+DB9	32	63	64	66	-DB9
+DB10	33	65	66	67	-DB10
+DB11	34	67	68	68	-DB11

Notes []: See page following Table 13e.

Table 13d: "WC" models single ended I/O, 80 conductor cable signal/contact assignments

Signal Name [1]	Connector Contact Number [3]	Signal Number [3]	Contact Name[1]
12 V CHARGE	1	41	12 V GND
12 V	2	42	12 V GND
12 V	3	43	12 V GND
12 V	4	44	MATED 1
NC [10]	5	45	NC [10]
NC [10]	6	46	GND [8]
-DB11	7	47	GND
-DB10	8	48	GND
-DB9	9	49	GND
-DB8	10	50	GND
-I/O	11	51	GND
-REQ	12	52	GND
-C/D	13	53	GND
-SEL	14	54	GND
-MSG	15	55	GND
-RST	16	56	GND
-ACK	17	57	GND
-BSY	18	58	GND
-ATN	19	59	GND
-DBP	20	60	GND
-DB7	21	61	GND
-DB6	22	62	GND
-DB5	23	63	GND
-DB4	24	64	GND
-DB3	25	65	GND
-DB2	26	66	GND
-DB1	27	67	GND
-DB0	28	68	GND
-DP1	29	69	GND
-DB15	30	70	GND
-DB14	31	71	GND
-DB13	32	72	GND
-DB12	33	73	GND
+5 V	34	74	MATED 2
+5 V	35	75	5 V GND
+5 V CHARGE	36	76	5 V GND
NC [10]	37	77	ACTIVE LED OUT [4] [9]
RMT-START [5] [9]	38	78	DLYD-START [6] [9]
SCSI ID (0) [7] [9]	39	79	SCSI ID (1) [7] [9]
SCSI ID (2) [7] [9]	40	80	SCSI ID (3) [7] [9]

Notes []: See page following Table 13e.

Table 13e: “DC” differential models, 80 pin I/O connector pin assignments (Nonshielded connector) [13]

Signal Name [1]	Connector Contact Number [3]	Signal Number [3]	Contact Name[1]
12 V CHARGE	1	41	12 V GND
12 V	2	42	12 V GND
12 V	3	43	12 V GND
12 V	4	44	MATED 1
NC [10]	5	45	NC [10]
NC [10]	6	46	DIFFSENS [8]
-DB11	7	47	+DB11
-DB10	8	48	+DB10
-DB9	9	49	+DB9
-DB8	10	50	+DB8
-I/O	11	51	+I/O
-REQ	12	52	+REQ
-C/D	13	53	+C/D
-SEL	14	54	+SEL
-MSG	15	55	+MSG
-RST	16	56	+RST
-ACK	17	57	+ACK
-BSY	18	58	+BSY
-ATN	19	59	+ATN
-DBP	20	60	+DBP
-DB7	21	61	+DB7
-DB6	22	62	+DB6
-DB5	23	63	+DB5
-DB4	24	64	+DB4
-DB3	25	65	+DB3
-DB2	26	66	+DB2
-DB1	27	67	+DB1
-DB0	28	68	+DB0
-DP1	29	69	+DP1
-DB15	30	70	+DB15
-DB14	31	71	+DB14
-DB13	32	72	+DB13
-DB12	33	73	+DB12
+5 V	34	74	MATED 2
+5 V	35	75	5 V GND
+5 V	36	76	5 V GND
NC [10]	37	77	ACTIVE LED OUT [4] [9]
RMT-START [5] [9]	38	78	DLYD-START [6] [9]
SCSI ID (0) [7] [9]	39	79	SCSI ID (1) [7] [9]
SCSI ID (2) [7] [9]	40	80	SCSI ID (3) [7] [9]

Notes []: See page following this Table.

Notes [] for Tables 13a through 13e.

- [1] See Section 9.7.1 or 9.6.4.2 for detailed electrical characteristics of these signals.
- [2] The conductor number refers to the conductor position when using 0.025-inch (0.635 mm) centerline flat ribbon cable. Other cables types may be used to implement equivalent contact assignments.
- [3] Connector contacts are on 0.050 inch (1.27 mm) centers.
- [4] Front panel LED signal; indicates drive activity for host front panel hard drive activity indicator.
- [5] Asserted by host to enable Motor Start option (enables starting motor via SCSI bus command).
- [6] Asserted by host to enable Delayed Motor Start option (motor starts at power on or after a delay of 12 seconds times drive ID). This and [3] above are mutually exclusive options.
- [7] Binary code on A3, A2, A1 and A0 asserted by host to set up SCSI bus ID in drive.
- [8] GND provides a means for differential devices to detect the presence of a single ended device on the bus.
- [9] Signals [4] through [7] are used in place of installing jumpers and cables on option select connectors J2 and J6. See Section 8.1.1 notes.
- [10] "NC" means no connection.
- [11] The conductor number refers to the conductor position (right to left in Figure 10) when using 0.050 inch (1.27 mm) centerline flat ribbon cable. Other cable types may be used to implement equivalent contact assignments.
- [12] Connector contacts are on 0.100 inch (2.54 mm) centers.
- [13] 8 bit devices which are connected to the 16 data bit differential I/O shall leave the following signals open:
 - DB12 –DB13 –DB14 –DB15 –DBP1 –DB8 –DB9 –DB10 –DB11.
 - +DB12 +DB13 +DB14 +DB15 +DBP1 +DB8 +DB9 +DB10 +DB11.8 bit devices which are connected to the 16 bit single-ended I/O shall have the following signals connected as shown:
 - to ground: +DB12 +DB13 +DB14 +DB15 +DBP1 +DB8 +DB9 +DB10 +DB11.
 - open circuit: –DB12 –DB13 –DB14 –DB15 –DBP1 –DB8 –DB9 –DB10 –DB11.All other signals shall be connected as defined.

9.7 Electrical description

“N” and “W” models use single-ended interface signals. These signals must be terminated with 110-ohm active termination circuits at each end of the total cable. Single-ended circuits use open collector or three state drivers. All of these models can be configured to provide the SCSI termination.

“WD” models use differential interface signals and each of these must be terminated at each end of the total cable with 330 ohms to +5V and 330 ohms to ground with 150 ohms between each differential pair. All I/O circuits are open collector, three state drivers. Differential I/O drives are shipped without terminators. These drives have no provisions for adding terminator sockets on the PCB. This means some method of external termination must be provided by the user when termination is required.

“WC” and “DC” models use the single connection attachment (SCA) connector. This 80-pin connector is designed to plug directly into a back panel or plane. No external cables are required. Active terminators on the back panel must be provided by the user. This connector is not recommended where cabling is required.

9.7.1 Single-ended drivers/receivers

For “N,” “W,” and “WC” models which use single-ended drivers and receivers, typical circuits are shown in Figure 12. Terminator circuits (Note [1]) are to be enabled only when the disc drive is first or last in the daisy-chain.

Transmitter characteristics

Single-ended drives use an ANSI SCSI compatible open collector single-ended driver. This driver is capable of sinking a current of 48 mA with a low level output voltage of 0.4 volt.

Receiver characteristics

Single-ended drives use an ANSI SCSI single-ended receiver with hysteresis gate or equivalent as a line receiver.

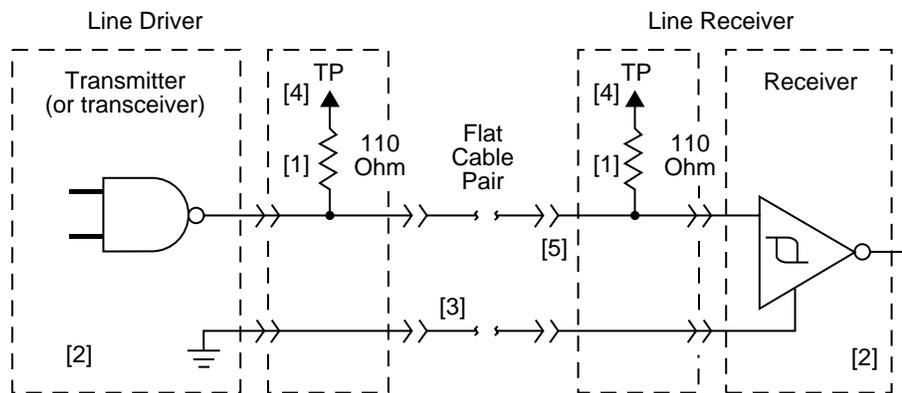


Figure 12. Single-ended transmitters and receivers

Notes.

- [1] Part of active terminator circuits. Non-removable LSI terminators, enabled in the drive (models “N” and “W” only) with jumper plug **TE** when it is first or last in the daisy-chain.
- [2] ANSI SCSI compatible circuits.
- [3] Total interface cable length should not exceed that specified in Section 9.6.3.1.
- [4] Interface signal levels and logical sense at the drive I/O connector for “N,” “W,” and “WC” models are defined as follows:

V_{il} (low-level input voltage) = 1.0 V maximum (signal true); minimum = V_{ss} – 0.5 V.

V_{ih} (high-level input voltage) = 1.9 V minimum (signal false); maximum = V_{dd} +0.5V.

V_{ihys} (Input Hysteresis) = 425 mV minimum

9.7.2 Differential drivers/receivers

Differential drivers and receivers are used by the “WD,” and “DC” models. Typical circuits are shown in Figure 13. The drive has no provisions for terminator circuits on differential I/O drives.

Differential Signals

All differential interface signals consist of two lines denoted +SIGNAL and –SIGNAL. A signal is true when +SIGNAL is more positive than –SIGNAL, and a signal is false when –SIGNAL is more positive than +SIGNAL. Drive user or systems integrator must provide some external means of termination.

Output Characteristics

Each signal driven by differential interface drives shall have the following output characteristics when measured at the disc drive SCSI connector:

Low-level output voltage* = 2.0 V maximum at Low-level output current = 55 milliamps.

High-level output voltage* = 3.0 V minimum at High-level output current = –55 milliamps

Differential voltage = 1.0 V minimum with common-mode voltage ranges from –7 V dc to +12 V dc.

*These voltages shall be measured between the output terminal and the SCSI device’s logic ground reference.

The output characteristics shall additionally conform to EIA RS-485-1983.


Input Characteristics

Each signal received by differential interface drives shall have the following input characteristics when measured at the disc drive SCSI connector:

Input current on either input = +2.0 milliamps maximum (includes both receivers and passive drivers).

This requirement shall be met with the input voltage varying between –7 V dc and +12 V dc, with power on or off, and with the hysteresis equaling 35 mv, minimum.

The input characteristics shall additionally conform to EIA RS-485-1983.

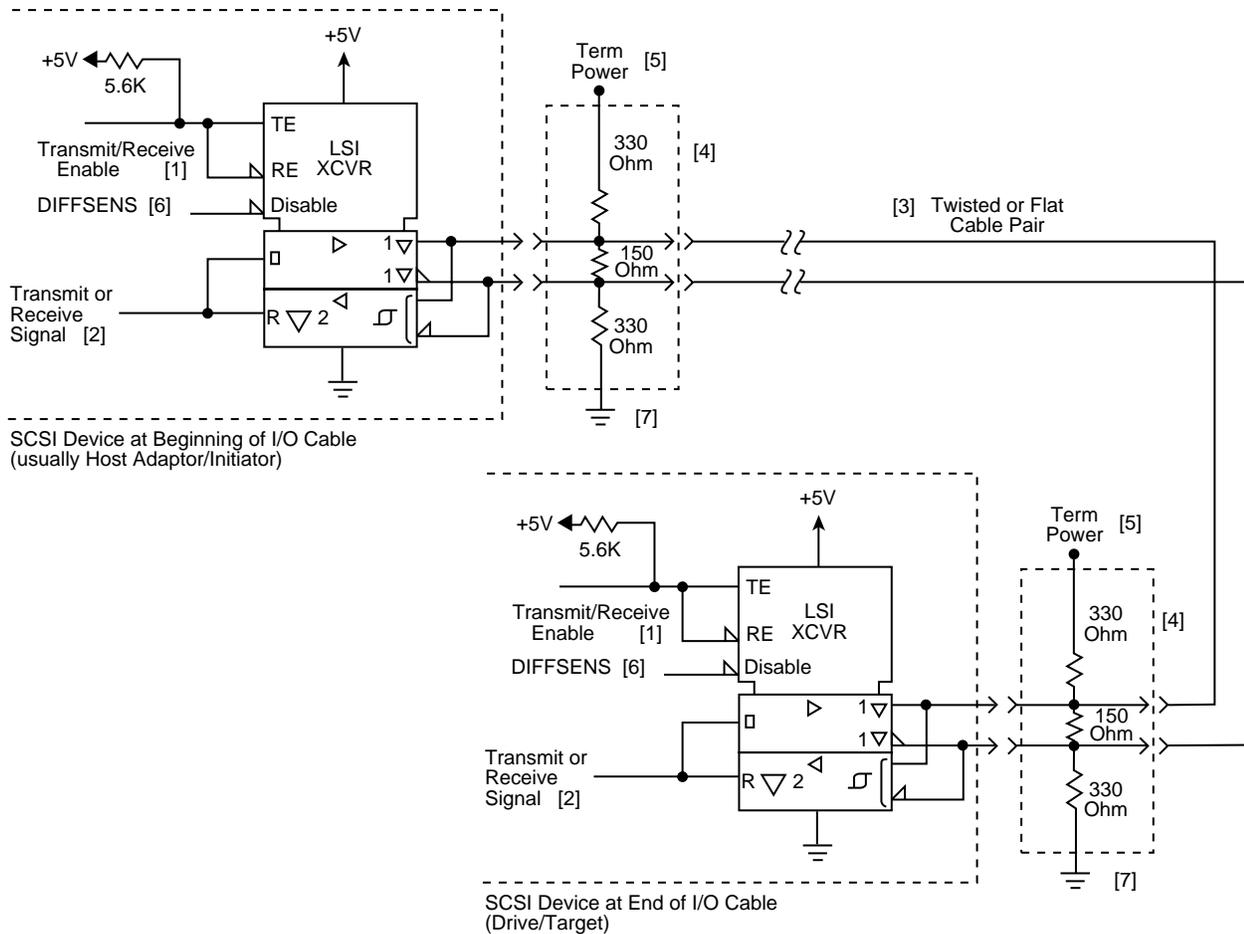

Notes.

- [1] Positive Logic Enables Transmitter (+5 V = Asserted)
Negative Logic Enables Receivers (0 V = Asserted)
- [2] Negative Logic Signal (0 V = Asserted)
- [3] Total interface cable length should not exceed value given in Section 9.6.3.2 from first SCSI device at beginning to end of daisy-chain. See Section 9.7.2 for signal characteristics.
- [4] I/O Line terminators. If SCSI device is a Seagate disc drive, terminators and a place to plug them in must be provided external to the drive by user, systems integrator or host equipment manufacturer where needed. The drive has no terminators and there are no provisions on the drive for terminator installation.
- [5] Arrangements for connecting terminator power to the terminators must be made by the systems designer. As a help, drive +5 V power is made available on SCSI bus ("N," "W," and "WD" models) for powering external terminators if the drive option select header jumper **TP** (Figure 7d) is installed in rightmost position "**TP**." See pin assignment Tables 13b and 13c for pins assigned to terminator power.
- [6] SCSI I/O line (pin 21) disables I/O) circuits if single-ended cable plugged in or cable plugged in upside down.
- [7] SCSI I/O cable ground. See Tables 13b and Table 13e.

Figure 13. Typical differential I/O line transmitter/receiver and external terminators

9.8 Terminator requirements

Internal disc drive I/O termination (provided only in model “N” and “W” drives single ended I/O model drives) consists of active circuits in an LSI module that is permanently mounted on the PCB. All single initiator/single target (non-daisy-chain) applications require that the Initiator and disc drive be terminated. Daisy-chain applications require that only the units at each end of the daisy-chain be terminated. All other peripherals on the chain must not be terminated. (See Figure 10).

Note. Remove drive terminator enabling jumper **TE** where terminators are not required. Removal of terminator power source selection jumper **TP** (see Figure 7d) does not disconnect the terminator resistors from the circuit.

It is highly recommended that ANSI SCSI-2 Standard’s Alternative 2 termination (active termination) be used for applications with single-ended (“N” and “W” models), especially if the bus will be operated at transfer rates above 5 Mbytes/sec. The “N” and “W” models provide on-board active termination that can be disabled by removal of the enable jumper **TE** (see Figure 7d).

Note. ACTIVE TERMINATORS ARE HIGHLY RECOMMENDED FOR USE IN THE DAISY-CHAIN AS DESCRIBED ABOVE. ACTIVE AND PASSIVE TERMINATORS SHOULD NOT BE MIXED ON THE SAME SCSI BUS.

Drive models “WD,” “WC,” and “DC” do not have internal terminators available. The user, systems integrator or host equipment manufacturer must provide a terminator arrangement external to the drive. For “WD” models, terminator modules can be purchased that plug between the SCSI I/O cable and the drive I/O connector or on the end of a short I/O cable stub extending past the last cable connector.

9.9 Terminator power

“N” and “W” model drives

You can configure terminator power in four different ways. See Section 8.1 for illustrations that show how to place jumpers enabling each of the following terminator power configurations:

1. Drive accepts terminator power through SCSI bus pins:
 - “N” Models Pin 26
 - “W” Models Pins 17, 18, 51, and 52
2. Drive supplies power to the SCSI bus.
3. Drive provides terminator power for optional internal terminator resistors using the drive’s power connector.
4. Drive provides power to its own terminators and to the SCSI bus terminator power line.

SCSI devices providing terminator power (TERMPWR) must have the following characteristics:

8-bit SCSI	V TERM = 4.25 V to 5.25 V 800 mA minimum source drive capability 1.0 A maximum
16-bit SCSI	V TERM = 4.25 V to 5.25 V 1,500 mA minimum source drive capability 3.0 A maximum

“WD” model drives

You can configure terminator power from the drive to the SCSI bus or have the host adaptor or other device supply terminator power to the external terminator. See Section 8.1 for illustrations that show how to place jumpers for this configuration.

“WC” and “DC” model drives

These drives cannot furnish terminator power because no conductors in the 80-pin I/O connector are devoted to terminator power.

9.10 Disc drive SCSI timing

Table 14: Disc drive SCSI timing

Description	Waveform Symbol [1]	Waveform Table [1]	Typical Timing
Target Select Time (no Arbitration) [4]	T00	N/A	<2 μ s
Target Select Time (with Arbitration) [4]	T01	4.5-1,2	<2 μ s
Target Select to Command	T02	4.5-1	3.77 μ s
Target Select to MSG Out	T03	4.5-2	1.57 μ s
Identify MSG to Command	T04	4.5-3	3.36 μ s
Command to Status	T05	4.5-5	Command Dependent
Command to Data (para. In)	T06	4.5-9	Command Dependent
Command to Data (para. Out)	T07	4.5-10	Command Dependent
Command to Data (Write to Data Buffer)	T08	4.5-10	Command Dependent
Command to Disconnect MSG	T09	4.5-6	Command Dependent
Disconnect MSG to Bus Free	T10	4.5-6,14	0.52 μ s
Disconnect to Arbitration (for Reselect) This measures disconnected CMD overhead	T11	4.5-6	Command Dependent
Target win Arbitration (for Reselect)	T12	4.5-7	3.00 μ s
Arbitration to Reselect	T13	4.5-7	1.60 μ s
Reselect to Identify MSG In	T14	4.5-7	1.39 μ s
Reselect Identify MSG to Status	T15	4.5-8	Command Dependent
Reselect Identify MSG to Data (media)	T16	4.5-11	Command Dependent
Data to Status	T17	4.5-15	Command Dependent
Status to Command Complete MSG	T18	4.5-5,8,15	0.98 μ s
Command Complete MSG to Bus Free	T19	4.5-5,8,15	0.51 μ s
Data to Save Data Pointer MSG	T20	4.5-14	4.00 μ s
Save Data Pointer MSG to Disconnect MSG	T21	4.5-14	0.79 μ s
Command Byte Transfer	T22	4.5-4	0.04 μ s
Next Command Byte Access:		4.5-4	
Next CDB Byte Access (Byte 2 of 6)	T23.6.2	4.5-4	0.58 μ s
Next CDB Byte Access (Byte 3 of 6)	T23.6.3	4.5-4	0.12 μ s
Next CDB Byte Access (Byte 4 of 6)	T23.6.4	4.5-4	0.12 μ s
Next CDB Byte Access (Byte 5 of 6)	T23.6.5	4.5-4	0.12 μ s
Next CDB Byte Access (Byte 6 of 6)	T23.6.6	4.5-4	0.12 μ s
Next CDB Byte Access (Byte 2 of 10)	T23.10.2	4.5-4	0.59 μ s
Next CDB Byte Access (Byte 3 of 10)	T23.10.3	4.5-4	0.11 μ s \pm 1 μ s
Next CDB Byte Access (Byte 4 of 10)	T23.10.4	4.5-4	0.12 μ s \pm 1 μ s
Next CDB Byte Access (Byte 5 of 10)	T23.10.5	4.5-4	0.11 μ s \pm 1 μ s
Next CDB Byte Access (Byte 6 of 10)	T23.10.6	4.5-4	0.11 μ s \pm 1 μ s
Next CDB Byte Access (Byte 7 of 10)	T23.10.7	4.5-4	0.13 μ s \pm 1 μ s
Next CDB Byte Access (Byte 8 of 10)	T23.10.8	4.5-4	0.12 μ s \pm 1 μ s
Next CDB Byte Access (Byte 9 of 10)	T23.10.9	4.5-4	0.12 μ s \pm 1 μ s
Next CDB Byte Access (Byte 10 of 10)	T23.10.10	4.5-4	0.12 μ s \pm 1 μ s

Table 14: Disc drive SCSI timing (Continued)

Description	Waveform Symbol [1]	Waveform Table [1]	Typical Timing
Data In Byte Transfer (parameter)	T24	4.5-12	0.04 μ s
Data Out Byte Transfer (parameter)	T25	4.5-13	0.04 μ s
Next Data In Byte Access (parameter)	T26	4.5-12	0.12 μ s
Next Data Out Byte Access (parameter)	T27	4.5-13	0.12 μ s
Data In Byte Transfer (media) [2]	T28	4.5-12	0.04 μ s
Data Out Byte Transfer (media) [2]	T29	4.5-13	0.04 μ s
Next Data In Byte access (media [2])	T30	4.5-12	0.12 μ s
Next Data Out Byte access (media [2])	T31	4.5-13	0.12 μ s
MSG IN Byte Transfer	T32	4.5-5,7,8,14,15	0.04 μ s
MSG OUT Byte Transfer	T33	4.5-2	0.04 μ s
STATUS Byte Transfer	T34	4.5-5,8,15	0.04 μ s
Synchronous Data Transfer Characteristics:			
Request Signal Transfer Period [3]	–	–	various

Notes.

- [1] See SCSI-2 Interface Manual P/N 77738479 (called Volume 2), Section 4.5
- [2] Maximum SCSI asynchronous interface transfer rate is given in Section 4.2.3 of this manual.
- [3] Synchronous Transfer Period is determined by negotiations between an Initiator and a Drive. The Drive is capable of setting periods as given in Section 9.5. See also Sections 3.1.5.2 and 3.5.3.2 of the SCSI-2 Interface Product Manual (P/N 77738479) for a description of synchronous data transfer operation.
- [4] Valid only for default Power Control Mode of "Idle" (Byte 3 of Power Control Page set to 2).

10.0 Seagate technical support services

If you need assistance installing your drive, consult your dealer. Dealers are familiar with their unique system configurations and can help you with system conflicts and other technical issues. If you need additional assistance with your Seagate® drive or other Seagate products, use one of the Seagate technical support services listed below.

SeaFONE® 1-800-SEAGATE

Seagate's 800 number (1-800-732-4283) allows toll-free access to automated self-help services, providing answers to commonly asked questions, troubleshooting tips, and specifications for disc drives and tape drives. This service is available 24 hours daily and requires a touch-tone phone. International callers can reach this automated self-help service by dialing 408-456-4496.

Online services

Using a modem, you can obtain troubleshooting tips, free utility programs, drive specifications and jumper settings for Seagate's entire product line. You can also download software for installing and analyzing your drive.

SeaNET™

You can obtain technical information about Seagate products over the Internet from Seagate's World Wide Web home page (<http://www.seagate.com>) or Seagate's ftp server (<ftp://ftp.seagate.com>). You can also send E-mail with your questions to **DiscSupport @ Seagate.com** or **TapeSupport @ Seagate.com**.

Seagate CompuServe forum

Online technical support for Seagate products is available on CompuServe. To access our technical support forum, type **go seagate**. This forum provides information similar to that found on SeaBOARD. In addition, you can type questions or browse through previous questions and answers on the forum messages.

SeaBOARD®

SeaBOARD is a computer bulletin board system that contains information about Seagate disc and tape drive products and is available 24 hours daily. Set your communications software to eight data bits, no parity, and one stop bit (8-N-1).

Location	Phone number
Australia	61-2-9756-2359
France	33 1-48 25 35 95
Germany	49-89-140-9331
Taiwan	886-2-2719-6075
Thailand	662-531-8111
UK	44-1628-478011
USA	Disc: 405-936-1600; Tape: 405-936-1630

FAX services

SeaFAX®

You can use a touch-tone telephone to access Seagate's automated FAX system to receive technical support information by return FAX. This service is available 24 hours daily.

Location	Phone number
Australia	61-2-9756-5170
Germany	49-89-1430-5102
UK	44-1628-894084
USA	Disc: 405-936-1620; Tape: 405-936-1640

Seagate technical support FAX

You can FAX questions or comments to technical support specialists 24 hours daily. Responses are sent during business hours.

Location	Phone number
Australia	61-2-9725-4052
France	33 1-46 04 42 50
Germany	49-89-1430-5100

Location	Phone number
Hong Kong	852-2368 7173
Japan	81-3-5462-2979
Korea	82-2-556-4251/7395
Singapore	65-488-7528
Taiwan	886-2-2715-2923
UK	44-1628-890660
USA	Disc: 405-936-1685; Tape: 405-936-1683

Direct-support services

Seagate technical support

For one-on-one help, you can talk to a technical support specialist during local business hours. Before calling, note your system configuration and drive model number (STxxxx).

Location	Phone number
Australia	61-2-9725-3366 (9:00 A.M. to 5:00 P.M., Eastern time, M–F)
France	33 1-41 86 10 86 (9:30 A.M. to 12:30 P.M., 2:00 P.M. to 5:00 P.M., M–F)
Germany	Disc: 49-89-140-9332; Tape: 49-89-140-9333 (9:30 A.M. to 12:30 P.M., 2:00 P.M. to 4:00 P.M., M–F)
Hong Kong	852-2368 9918
Korea	82-2-531-5800 (9:00 A.M. to 12:00 P.M., 1:00 P.M. to 6:00 P.M., M–F)
Singapore	65-488-7584 (9:00 A.M. to 12:00 P.M., 2:00 P.M. to 5:00 P.M., M–F)
Taiwan	886-2-2514-2237
UK	44-1628-894083 (10:00 A.M. to 1:00 P.M., 2:00 P.M. to 5:00 P.M., M–F)
USA	Please dial 1-800-SEAGATE or 408-456-4496 for the specific product telephone number. (8:00 A.M. to 1:15 P.M., 2:30 P.M. to 7:00 P.M., Central time, M–F)

SeaTDD™ 405-936-1687

Using a telecommunications device for the deaf (TDD), you can send questions or comments 24 hours daily and exchange messages with a technical support specialist between 8:00 A.M. to 12:15 P.M. and 1:30 P.M. to 6:00 P.M. (Central time) Monday through Friday.

Customer service centers

Seagate direct OEM, Distribution, and Systems Integrator customers should contact their Seagate service representative for warranty information. Other customers should contact their place of purchase. Seagate offers comprehensive customer support for all Seagate drives. These services are available worldwide.

Location	Phone number	FAX number
Asia Pacific and Australia	65-485-3595	65-488-7503
Europe, Middle East, and Africa	31-2031-67300	31-2065-34320
Japan	81-3-5462-2904	81-3-5462-2979
USA	1-800-468-3472	405-949-6740
Other Americas (Brazil, Canada, Mexico)	405-949-6706	405-949-6738
<i>Manufacturer's representatives</i>		
Brazil		
MA Informatica	55-21-516-6649	55-21-516-5280
Canada		
Memofix	905-660-4936	905-660-8738
Adtech	905-812-8099	905-812-7807
	1-800-624-9857	
Mexico		
Abicom Seamax SA DE CV	525-546-4888	525-546-4888
Southern Europe		
Caesar Italia	39-688-18149	39-688-02103

Index

Symbols

+5 and +12 volt supplies 19

Numerics

50 conductor connector 57
 50 conductor flat cable 55
 50 pin connector 58, 59
 68 conductor connector 57
 68 conductor flat cable 55
 80 conductor connector 57
 80 conductor interface 57
 80 pin connector option 55
 80 pin I/O connector 65, 66

A

AC power 19
 access time 9, 11
 accessories 8
 acoustics 25
 active circuit 71
 activity indicator 67
 actuator 7, 39
 actuator assembly 6
 adaptive servo calibration 20
 address 11
 air circulation 39
 air cleanliness 25
 air flow 21, 39
 suggested 39
 air inlet 39
 altitude 23
 altitude and atmospheric pressure 21
 ambient 21
 ambient temperature 21, 39
 arbitration priority 58
 asynchronous interface transfer rate 73
 audible noise 3, 7
 Australia/New Zealand Standard 4
 automatic retry 15
 automatic shipping lock 6
 average idle current 19
 average latency 7
 average rotational latency 9, 10

B

background processing 7
 backward compatibility 5
 bits/inch 9
 buffer 11, 12
 buffer segment 11, 12
 buffer segmentation 12
 buffer-full 11
 buffer-full ratio 11

bulkhead connector 55
 bus device reset message 46
 bytes per sector 44
 bytes/surface 9
 bytes/track 9

C

cabinet cooling 39
 cable 52
 shielded 55
 unshielded 55
 cable characteristics
 single-ended circuits 56
 cable length 55, 68
 cache 11, 12
 cache buffer 7
 cache miss 11
 cache mode 11
 cache operation 11
 cache operation hit 12
 cache segment 12
 caching write data 12
 calibration 20
 Canadian Department of Communications 3
 capacities 8
 capacity, drive, programmable 8
 case temperature 21
 CE Marking 3
 change definition command 42
 changeable bit 47
 changeable value 46
 characteristic impedance 55
 check condition 46
 class B limit 3
 command 11, 42
 command descriptor block (CDB) 11
 command queuing 7
 condensation 21, 22
 conducted noise immunity 19, 20
 conductor size 55
 connect/disconnect 11
 connector 52
 connector contact 67
 connector key 57
 consecutive read operation 13
 contiguous blocks of data 13
 continuous vibration 25
 controller 11
 controller overhead 9
 controller self test 20
 cooling 39
 cooling air 21
 cost 55
 C-Tick Marking 3
 current 20, 68
 current limiting 20
 current profile 20

current requirements 19
 current value 46, 47
 cylinder boundary 13

D

daisy-chain 20, 55, 57, 58, 68, 71
 80 conductor 57
 terminating 55
 data area 20
 data correction 15
 by ECC 29
 data transfer period 52
 data transfer protocol 7
 data transfer rate 10
 DC cable and connector 52
 DC current 55
 DC power 11, 15, 21, 38, 52
 DC power carrying conductor 57
 DC power connector 52, 53, 54
 DC power requirements 19
 DC power source 57
 dedicated landing zone 6
 default 36, 38
 default mode parameter 31
 default value 46, 47, 48, 49, 50
 defect/error management 29
 delayed motor start option 19, 67
 delayed start 38
 depot repair 16
 depot repair philosophy 16
 diagnostics 20
 differential I/O circuit 38, 56
 differential interface circuit 55
 differential interface signals 68
 differential SCSI driver 7, 69
 differential SCSI receiver 7, 69
 differentiating features 5
 dimensions 26
 disable read ahead 12
 disc access 11
 disc drive
 termination 71
 disc media 10
 disc rotational speed 9
 disconnect/reconnect 12
 control 11
 specification 12
 discontinuance 55
 discontinuity (DISC) bit 13
 DRA bit 12
 drive 25
 drive activity 67
 drive activity LED 37
 drive capacity 9
 programmable 8
 drive configuration 37
 drive default mode parameter 31

drive defects list track 29
 drive failure 16
 drive firmware 46
 drive ID 31, 37
 drive ID select 32, 33, 34
 drive ID select jumper connector 31
 drive ID/option select header 31
 drive interface connector 57
 drive internal 20
 drive internal defects and errors 29
 drive malfunction 16
 drive mounting 26, 40
 constraints 15
 drive option select header 35
 drive orientation 11, 39
 drive power 31
 drive reset 37
 drive SCSI timing 72
 drive select header 52
 drive spindle 38
 drive transfer 12
 drive volume 31
 drive warranty 16
 driver and receiver 55
 dynamic spindle brake 7

E

ECC 15
 electrical characteristics 52, 67
 electromagnetic compatibility 3
 electromagnetic compliance 3
 electromagnetic interference (EMI) 15
 electromagnetic susceptibility 25
 embedded servo 7
 EMC compliance 3
 EMI requirements 3
 environment 39
 environmental control 25
 environmental interference 15
 environmental limits 21
 environmental requirements 15
 EPROM 46
 equipment malfunction 15
 error 15
 error correcting code 7
 error management system 29
 error rate 15
 error rate calculation 15
 error recovery 16
 ETF defect list 29
 European Union requirements 3
 EVPD bit 45
 execution time 11
 extended messages 41

F

fast SCSI transfer rate 55

- Fast-20 SCSI 5, 7
- fault status 15
- FCC rules and regulations 3
- field repair 16
- firmware 46
- flat ribbon cable 67
- flaw reallocation 10
- format 44
- format command 10
- format operation 29
- format time 10
- format unit command 29
- formatted 8
- formatting 31
- front panel 26
- front panel LED 67
- FSW function 47, 49, 50

G

- gradient 21, 22
- ground 62
- ground return 19
- grounding 40

H

- hard reset 46
- hardware error 16
- HDA 6, 16, 21, 39, 40
 - temperature 21
- head and disc assembly. *See* HDA
- heads 20
- heat removal 39
- heat source 39
- high level format 31
- host 12, 13, 29, 37, 38, 44, 55, 58, 62
- host adapter 31
 - adapter/initiator 58
- host backplane wiring 55
- host equipment 40, 55, 57
 - DC power 57
 - manufacturer 31
- host I/O signal 31
- host system 31
- host system malfunction 15
- host/drive operational interface 15
- hot connect/disconnect 17
- hot plug 7, 17
- humidity 21, 22

I

- I/O cable 62
- I/O circuits
 - differential 56
 - single-ended 56
- I/O connector 37, 55
- I/O line 38

- I/O termination 71
- identified defect 29
- idle condition 21
- impedance match/mismatch 55
- initiator
 - termination 71
- inquiry command 45
- inquiry vital product data 45
- installation 31
- installation guide 4, 8
- installation instructions 31
- instantaneous current peak 19
- integrated SCSI controller 7
- interface cable length 58
- interface data 10
- interface requirements 41
- interface signals
 - differential 68
 - single-ended 68
- interface timing 15
- interleave 7
- interleave factor 10
- internal data rate 9

J

- J1-auxiliary 31
- jumper 8, 31, 36, 37, 38, 67
- jumper function description 38
- jumper header 36
- jumper plug 31
- jumper plug TE 68
- jumper plug type 31

L

- landing zone 7, 20
- LB 12
- logical 11
- logical block 11, 12
- logical characteristics 52
- logical segment (mode select page 08h) 11
- low level format 31
- LSI module 71

M

- magnetoresistive heads 5
- mating connector 52, 56, 57
- mating flat cable connector 57
- maximum case temperature 21
- maximum current requirements 20
- maximum operating current 19
- maximum starting current 19
- ME jumper 38
- mean time between failure. *See* MTBF
- media 7, 46
- media defect 15
- media defect induced error 15

medium error 16
 message protocol 52
 message protocol system 29
 messages
 SCSI interface 41
 miscellaneous features 51
 mode page 01 46
 mode page 08h 11
 mode parameter 46
 page 08h 13
 mode select command 11, 12, 46
 mode select page 08h 12
 mode sense command 46, 47
 mode sense command page 08h 12
 mode sense data 46, 47, 48, 49, 50
 mode sense value 46
 model number table 5
 motor start command 11
 motor start delay option 67
 motor start option 11, 19, 67
 mounting configuration 26
 mounting configuration dimensions 26, 27, 28
 mounting constraints 15, 40
 mounting point 40
 mounting surface 40
 mounting surface distortion 40
 mounting surface stiffness 40
 MR heads 5
 MTBF 15, 16, 21
 multiple segment 12
 multi-segmented cache control 11

N

noise 20
 audible 3, 7
 nominal voltage 21
 non-operating 22, 23, 25
 temperature 21
 non-operating vibration 25
 nonshielded 50 conductor connector 57
 nonshielded 68 conductor connector 57
 nonshielded cable connector 55
 nonshielded flat cable 55
 number of loads 55

O

office environment 25
 operating 22, 23, 25
 operating environment 16
 operating option 31
 operating parameter 46
 operator intervention 15
 option jumper 31
 option jumper location 31
 option select header 52
 option select jumper 31
 options 8

orientation 11, 23, 39
 out-of-plane deflection 40
 out-of-plane distortion 40
 output voltage 68
 overhead time 10

P

package size 23
 package test specification 4
 packaged 23
 parity 38
 parity checking 38
 parity error 38
 partition or logical drive 31
 PCB 16, 31, 36, 38, 39, 40, 46, 52, 55, 58
 temperature 21
 PCB circuit run 55
 PD jumper 38
 peak bits/inch 9
 peak starting current 19
 performance characteristics 9
 performance degradation 23
 peripheral I/O cable 20
 physical buffer space 11
 physical characteristics 52
 physical damage 25
 physical interface 52, 53, 54
 physically contiguous blocks of data 13
 power 19, 20, 38
 power connector 19, 20
 power control switch 11
 power dissipation 21
 power distribution 3
 power requirements 19
 power sequencing 20
 power supply voltage 15
 power-carrying conductor 57
 power-on 31, 37, 67
 power-on operating hours 16
 power-on reset 46
 power-up 20, 38
 power-up hours 16
 prefetch 11, 12, 13
 prefetch (read look-ahead) 11, 13
 prefetch ceiling field 12
 prefetch data 12
 prefetch field 12
 prefetch hit 12, 13
 prefetch mode 11
 prefetch of contiguous blocks 13
 prefetch operation 11, 12
 prefetch segmented cache control 11
 preventive maintenance 15, 16
 printed circuit board. *See* PCB
 PRML read channel electronics 5
 product data page 45
 programmable drive capacity 8

R

radio interference regulations 3
 read 11
 read caching 12
 read command 11, 12
 read data 11
 read error 15
 read error rate 15, 29
 read operation 11
 read power dissipation 21
 read/write head 9
 ready 46
 receive diagnostic results 29
 recommended mounting 24
 recoverable seek error 16
 reference documents 4
 regulation 19
 relative humidity 22
 reliability 7
 reliability and service 16
 reliability specifications 15
 remote ID selection 37
 remote switch 31
 repair facility 16
 repair information 18
 REQ/ACK offset 52
 request sense command 29
 request sense information 16
 resonance 23
 retrieved data 11

S

S.M.A.R.T. 7, 17
 safe power transmission 57
 safety 3
 saved value 46, 47
 SCAM 7, 31
 SCSI
 commands 42
 format commands 15
 interface data transfer rate 10
 messages 41
 SCSI bus 31, 55
 SCSI bus cable 31
 SCSI bus condition 51
 SCSI bus I/O cable 38
 SCSI bus ID 67
 SCSI bus phase sequence 51
 SCSI command 29
 SCSI device 55
 SCSI I/O connector 53, 54
 SCSI I/O termination 19
 SCSI ID 31, 38
 SCSI interface 11, 15, 55
 SCSI interface cable 55
 SCSI interface commands supported 42

SCSI interface connector 52
 SCSI interface data 10
 SCSI Interface Product Manual 3, 4, 5
 SCSI systems error 29
 SCSI systems error consideration 29
 SCSI systems error management 29
 SCSI-1 mode 42
 SCSI-2/SCSI-3 47
 SCSI-2/SCSI-3 mode 42
 SCSI-3 (Fast-20) interface 5
 Seagate support service 31
 sector 12
 sector interleave 10
 sector size 8
 sector sizes 10
 sector transfer 11
 seek error 15, 16
 seek positioning error 16
 segment 11, 12
 segment number 12
 self-contained 12
 sense key 16
 sequential read operations 13
 service
 life 15, 16
 philosophy 16
 tools 16
 servo data 6
 shielded cable 55
 shielding 3
 shielding effectiveness 55
 shipping 17
 shipping container 21
 shock 23
 and vibration 23
 shock mount 40
 signal ground 40
 signal reflection 55
 single connection attachment (SCA) 68
 single ended I/O
 signal/contact assignment
 50 conductor 62
 68 conductor 63
 80 conductor 65
 single unit shipping pack 8
 single-ended drive 68
 single-ended I/O 38
 single-ended I/O circuits 56
 single-ended interface circuit 21, 55
 single-ended interface signals 68
 single-ended SCSI driver 7, 55, 68
 single-ended SCSI receiver 7, 55, 68
 site installation 16
 software interleave 13
 spare part 16
 spindle 20
 spindle startup 38
 standard day 21

- standards 3
- start motor command 19
- start unit command 38
- start/stop time 11
- status 29
- STIR algorithm 7
- stop spindle 11
- stop time 11
- storage capacity 29
- straight-in connector 58
- strict bit in Mode page 00h 12
- supply voltage 19
- support services 75
- synchronous data transfer 52
- synchronous data transfer operation 73
- synchronous data transfer period 52
- synchronous transfer period 73
- synchronous transfer rate 10
- system chassis 40
- system operation 55
- system recovery procedures 15

T

- technical support services 75
- temperature 11, 21, 39
 - ambient 21
 - case 21
 - gradient 21
 - maximum case 21
 - non-operating 21
 - PCB and HDA 21
 - regulation 3
 - See also* cooling
- terminated 20
- termination 20
 - active 71
 - disc drive 71
 - initiator 71
- terminator 31, 38, 58, 68
 - active 71
 - passive 71
- terminator circuit 38, 68
- terminator enable jumper TE 31, 55, 58, 71
- terminator power 38, 62, 71
 - source selection jumper TP 55, 71
- terminator requirements 31, 71
- termpower 38
- TP jumper 38
- TP1 position 38
- tracks/inch 9
- tracks/surface, total 9
- transfer period 52
- transfer rate 10, 55
- troubleshooting 75
- twisted pair ribbon cable 55
- typical access time 11

U

- Ultra SCSI 5, 7
- unformatted 8
- unrecoverable condition 15
- unrecoverable error 15
- unrecoverable seek error 16
- unrecoverable write error 15
- unshielded cable 55
- unshielded flat cable 55

V

- vibration 23, 25
- vital product data 45
- volatile memory 46
- voltage 11, 19
- voltage margin 11

W

- wall/bracket mounted connector 55
- warranty 7, 17
- wet bulb temperature 21
- WP jumper 38
- wrap-around 12
- write caching 12
- write command 12
- write data logical block 12
- write error 15
 - unrecoverable 15
- write operation 12
- write protect 38

Z

- zoned bit recording (ZBR) 7



Seagate Technology, Inc.
920 Disc Drive, Scotts Valley, California 95066-4544, USA
Publication Number: 77767491, Rev. D, Printed in USA