

SKKT 210, SKKH 210



SEMIPACK® 3 ¹⁾

Thyristor / Diode Modules

SKKT 210

SKKH 210

Features

- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precious metal pressure contacts for high reliability
- Thyristor with amplifying gate
- UL recognized, file no. E 63 532

Typical Applications

- DC motor control (e. g. for machine tools)
- AC motor starters
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)


1) Discontinued version

2) See the assembly instruction

3) The screws must be lubricated







V_{RSM} V	V_{RRM}, V_{DRM} V	$I_{TRMS} = 350$ A (maximum value for continuous operation) $I_{TAV} = 210$ A (sin. 180; $T_c = 90$ °C)		
900	800	SKKT 210/08E		
1300	1200	SKKT 210/12E	SKKH 210/12E	
1500	1400	SKKT 210/14E	SKKH 210/14E	
1700	1600	SKKT 210/16E	SKKH 210/16E	
1900	1800	SKKT 210/18E	SKKH 210/18E	
2100	2000	SKKT 210/20E H4	SKKH 210/20E H4	
2300	2200	SKKT 210/22E H4	SKKH 210/22E H4	

Symbol	Conditions	Values	Units
I_{TAV}	sin. 180; $T_c = 85$ (100) °C;	230 (167)	A
I_D	P16/200F; $T_a = 35$ °C; B2 / B6	420 / 550	A
I_{RMS}	P16/200F; $T_a = 35$ °C; W1 / W3	526 / 3 * 440	A
I_{TSM}	$T_{vj} = 25$ °C; 10 ms	8500	A
	$T_{vj} = 130$ °C; 10 ms	7500	A
i^2t	$T_{vj} = 25$ °C; 8,3 ... 10 ms	361000	A²s
	$T_{vj} = 130$ °C; 8,3 ... 10 ms	281000	A²s
V_T	$T_{vj} = 25$ °C; $I_T = 750$ A	max. 1,5	V
$V_{T(TO)}$	$T_{vj} = 130$ °C	max. 0,95	V
r_T	$T_{vj} = 130$ °C	max. 0,6	mΩ
I_{DD}, I_{RD}	$T_{vj} = 130$ °C; $V_{RD} = V_{RRM}, V_{DD} = V_{DRM}$	max. 50	mA
t_{gd}	$T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs	1	μs
t_{gr}	$V_D = 0,67 * V_{DRM}$	2	μs
$(di/dt)_{cr}$	$T_{vj} = 130$ °C	max. 250	A/μs
$(dv/dt)_{cr}$	$T_{vj} = 130$ °C	max. 1000	V/μs
t_q	$T_{vj} = 130$ °C ,	50 ... 150	μs
I_H	$T_{vj} = 25$ °C; typ. / max.	150 / 500	mA
I_L	$T_{vj} = 25$ °C; $R_G = 33$ Ω; typ. / max.	300 / 2000	mA
V_{GT}	$T_{vj} = 25$ °C; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25$ °C; d.c.	min. 200	mA
V_{GD}	$T_{vj} = 130$ °C; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 130$ °C; d.c.	max. 10	mA
$R_{th(j-c)}$	cont.; per thyristor / per module	0,14 / 0,07	K/W
$R_{th(j-c)}$	sin. 180; per thyristor / per module	0,15 / 0,075	K/W
$R_{th(j-c)}$	rec. 120; per thyristor / per module	0,165 / 0,083	K/W
$R_{th(c-s)}$	per thyristor / per module	0,04 / 0,02	K/W
T_{vj}		- 40 ... + 130	°C
T_{stg}		- 40 ... + 130	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min. for SKK ...H4	4800 / 4000	V~
M_s	to heatsink	9 ± 15 % ²⁾	Nm
M_t	to terminal	9 ± 15 % ³⁾	Nm
a		5 * 9,81	m/s²
m	approx.	750	g
Case	SKKT SKKH	A 73 a A 76 a	












SKKT

SKKH

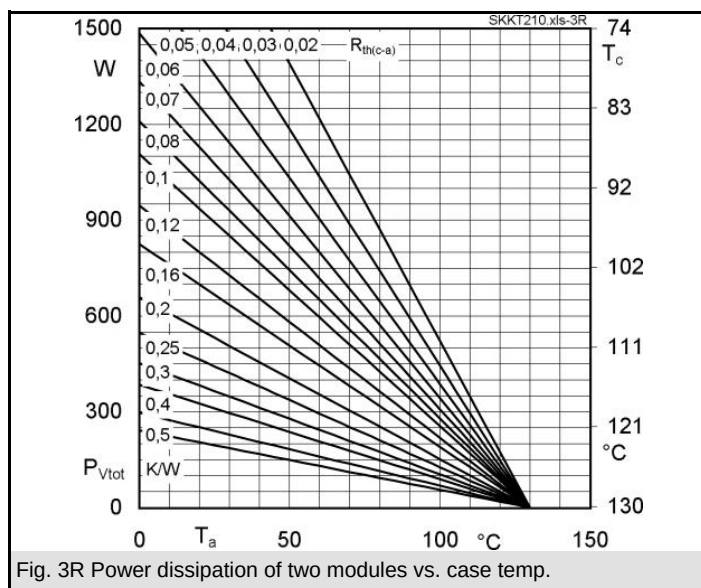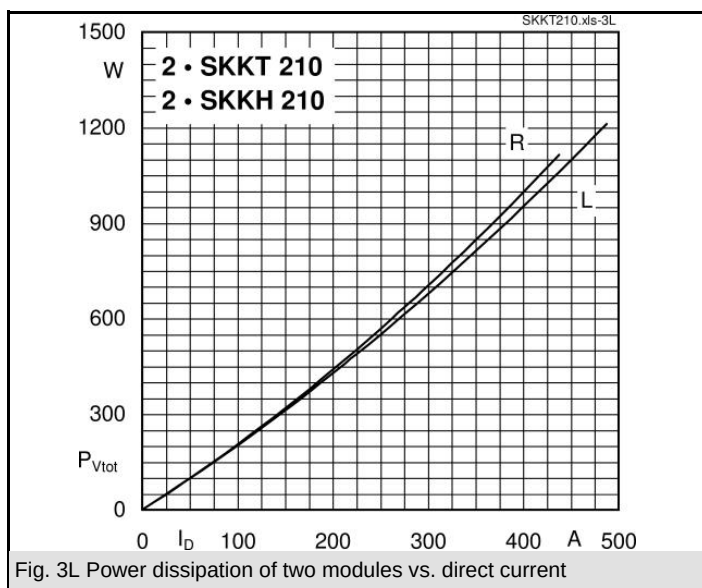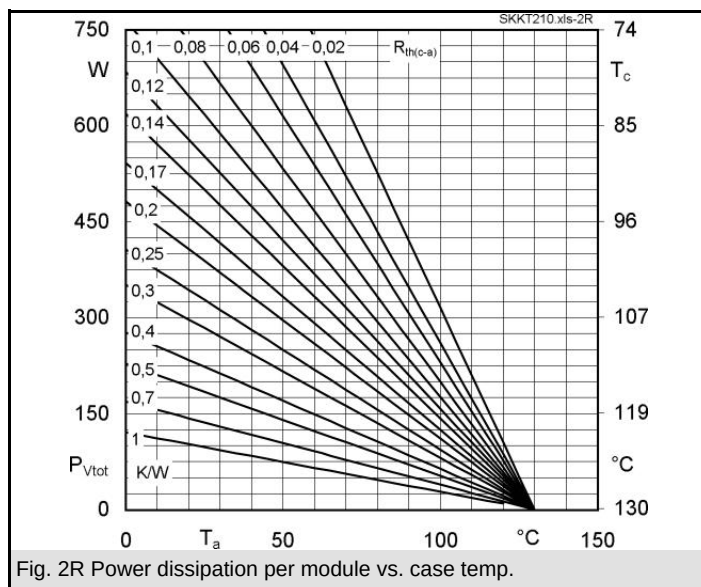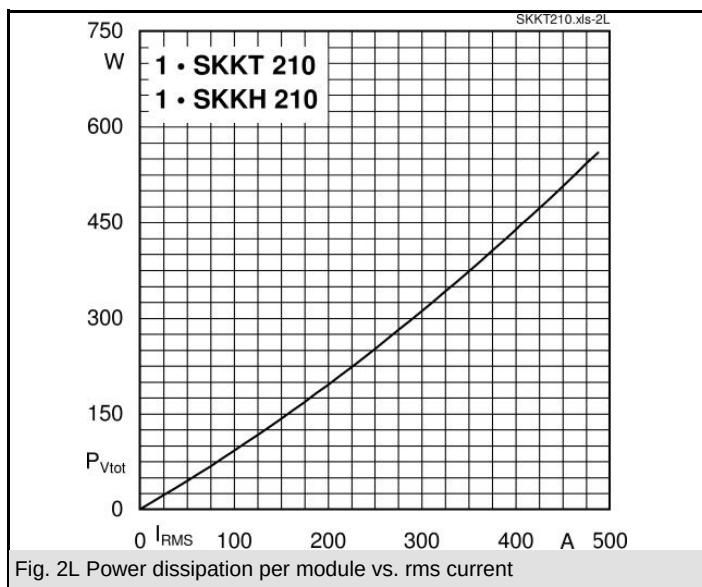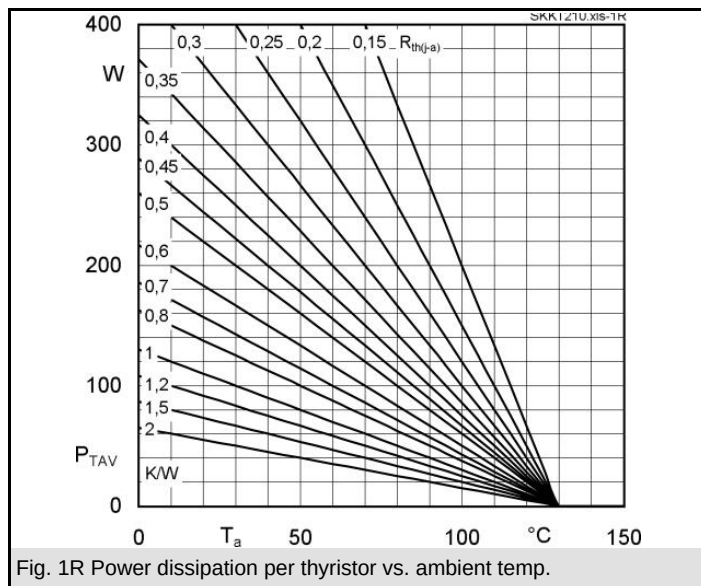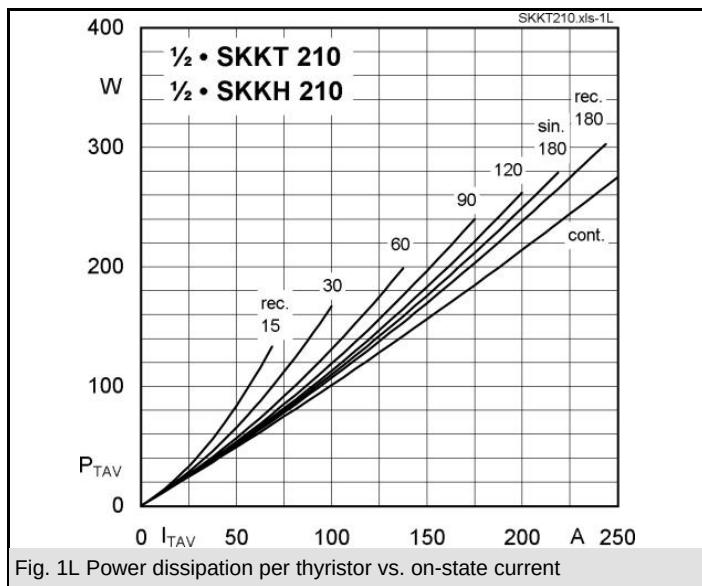

SKKT 210, SKKH 210

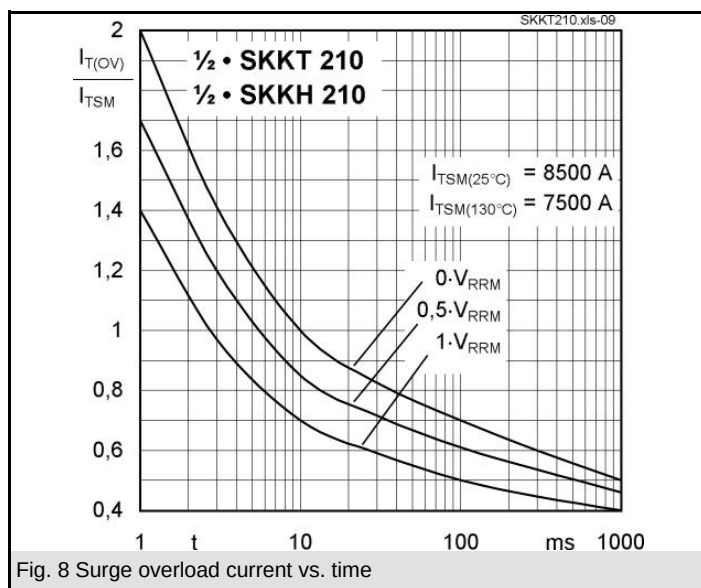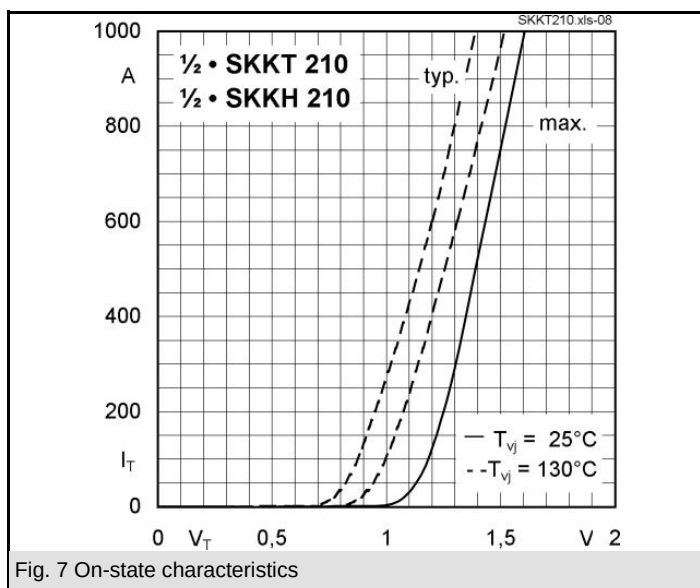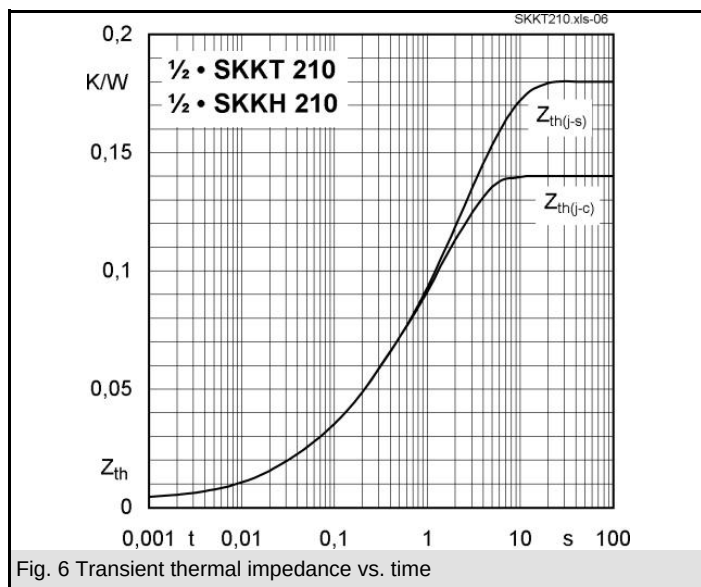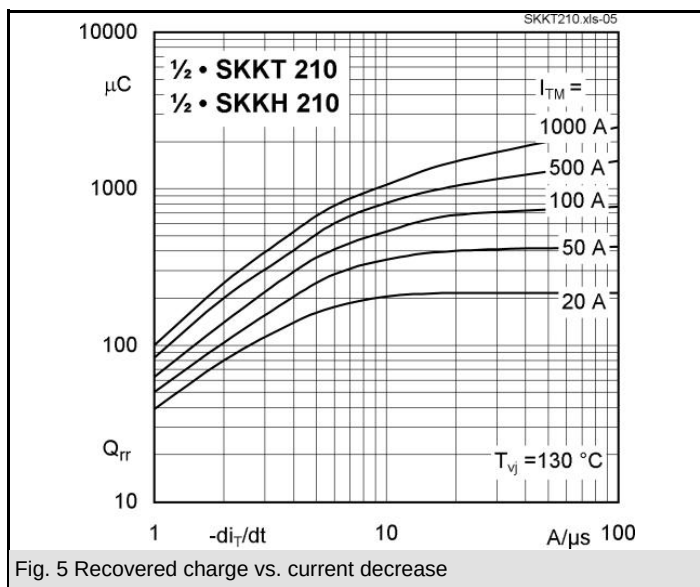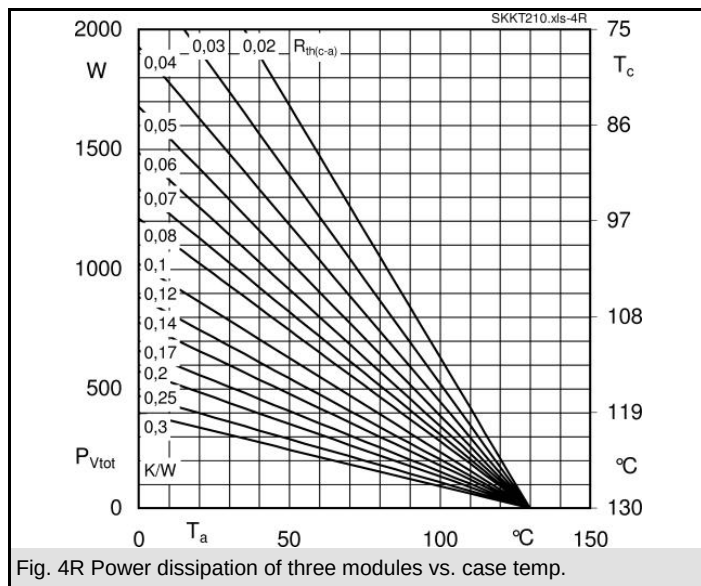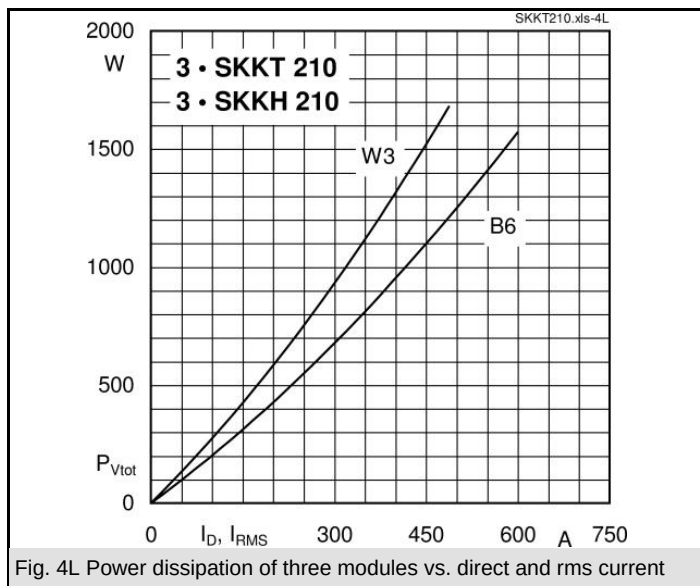

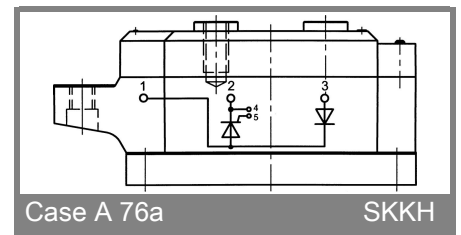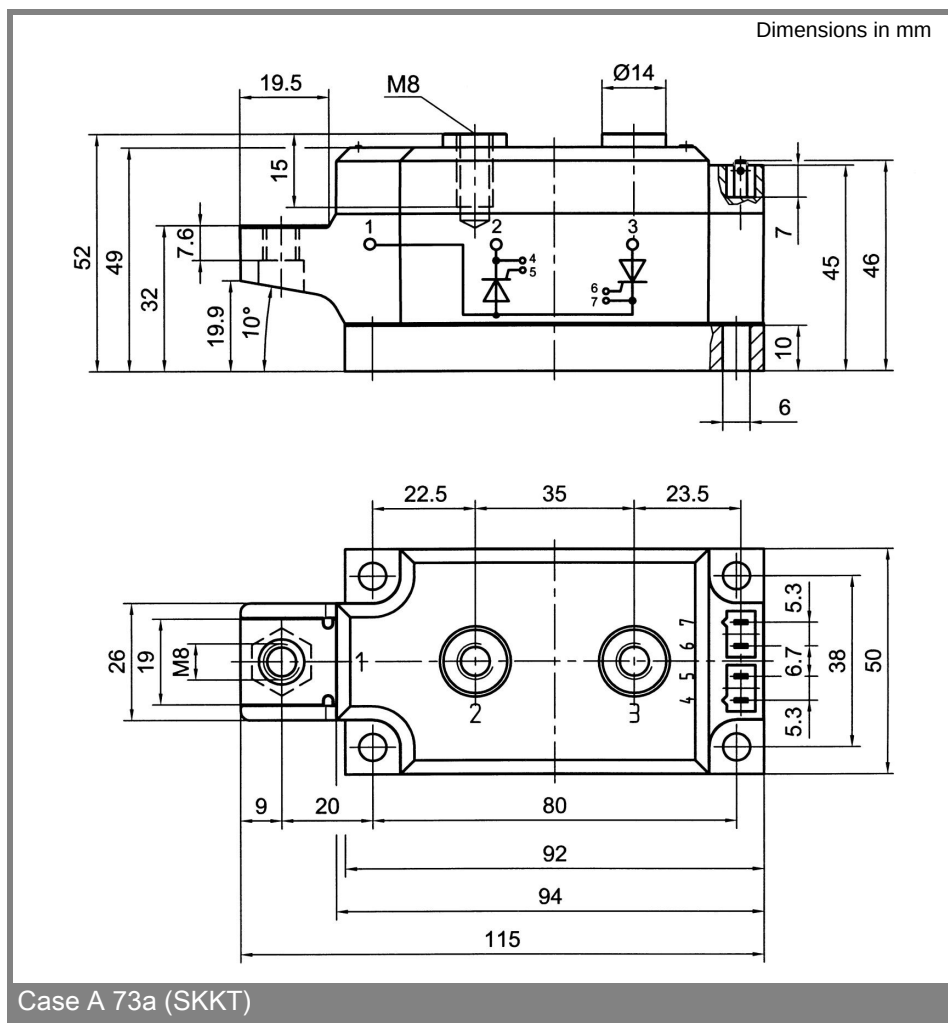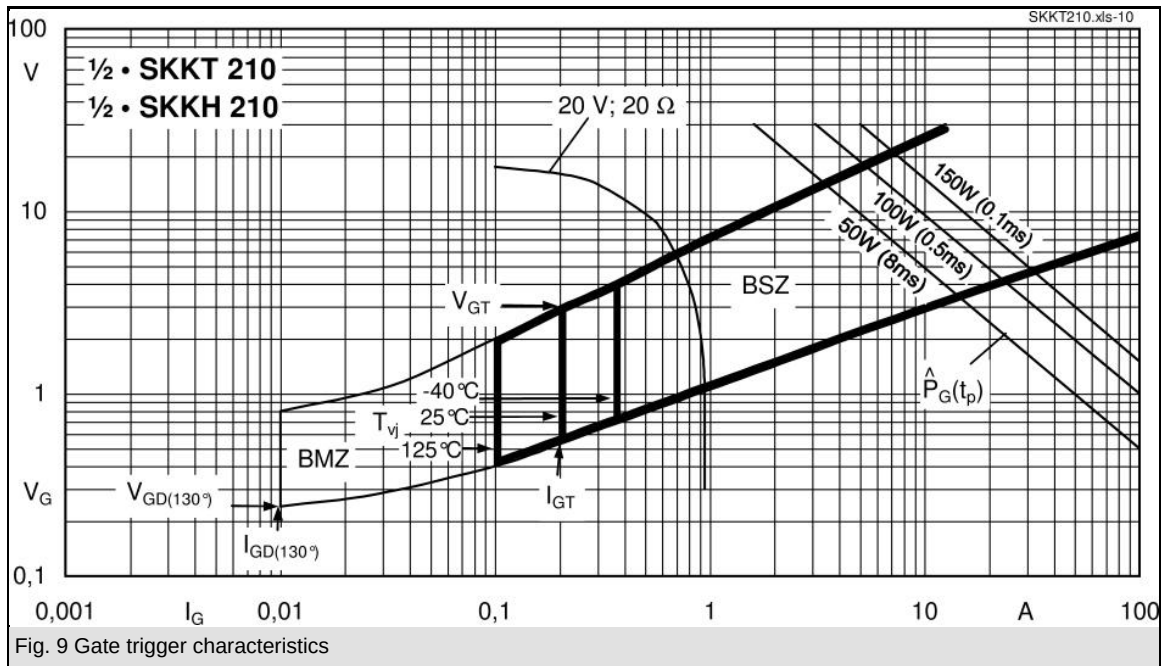

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.